

Connection cable


V95-G-YE30M-STOOW-V95-G

■ Thread 7/8 inch

Connection cable, 7/8" to 7/8", STOOW cable 5-pin



Dimensions

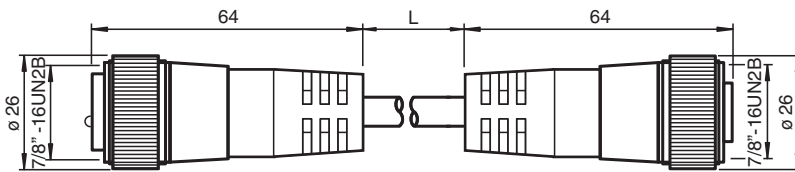

Technical Data

General specifications

Number of pins	5
Connection 1	socket
Construction type 1	straight
Threading 1	7/8 inch
Connection 2	plug
Construction type 2	straight
Threading 2	7/8 inch

Electrical specifications

Operating voltage	U_B	max. 600 V
Test voltage		1500 V
Operating current	I_B	8 A
Volume resistance		< 5 m Ω

Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------

Mechanical specifications


Degree of protection	IP67
Material	
Contacts	Cu alloy gold plated
Body	PVC, yellow
Cable	PVC

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119800_eng.pdf

Technical Data

Slotted nut	nickel-plated brass	
Core insulation		PVC
Cable	fine-strand, flexible	
Sheath diameter		Ø 9.9 mm
Bending radius	10 x cable diameter	
Color	yellow	
Cores	5 x 1.5 mm ² (16 AWG)	
Length	L	30 m
Note	STOOW UL Standard	

Connection



- 1) WH
- 2) RD
- 3) GN/YE
- 4) OR
- 5) BK

Release date: 2022-06-22 Date of issue: 2022-06-22 Filename: 70119800_eng.pdf