


# Display Unit

## DPU3200-22GT-304A-V1-N0

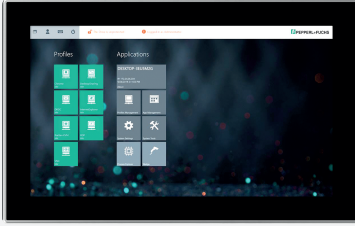

- 10 point multi-touch sensor option allows design of modern user interfaces
- Highly resistant to cleaning agents with stainless steel bezel and seamless glass design
- Design optimized for easy cleanability
- Low-power consumption and heat dissipation due to LED backlight technology


### Display Unit



### Function

The DPU3200-\* display unit is an ATEX / IECEx certified, UL listed device intended for use in potentially explosive atmospheres of Zone 2/22. Connected to a Pepperl+Fuchs VisuNet FLX thin client unit, PC unit or DMU unit, the DPU serves as a display with a touch screen. It enables users to perceive the system outputs of the computing unit and to input user data. The display unit can only be operated with the modular HMI components of the VisuNet FLX product line.

### Dimensions

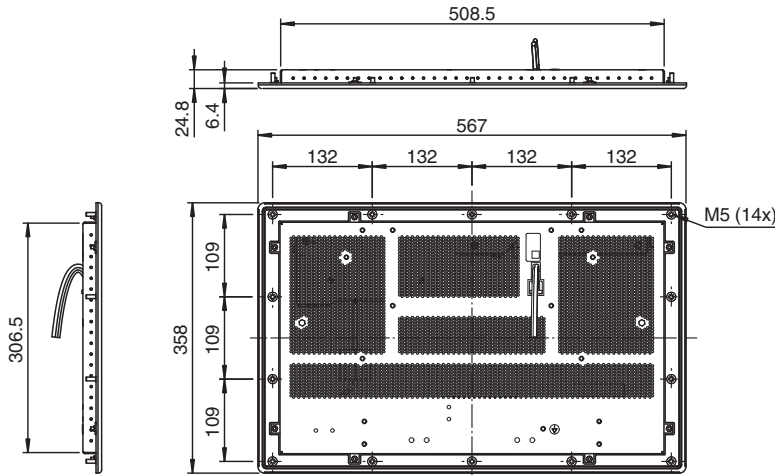

### Technical Data

Supply	
Power consumption	typical 22 W
Indicators/operating means	
Display	
Type	LC display with LED backlight
Screen size	54.61 cm (21.5 inch)
Resolution	1920x1080 (Full HD) , Aspect ratio 16:9
Color depth	24 bit (16.7 M) color
Contrast ratio	1000:1 (typical)
Brightness	250 cd/m <sup>2</sup> (nit)
Viewing angle	178° in all directions
Life span	Back lamp life: 30.000 hrs typical half life , at 25 °C (77 °F)

Release date: 2025-02-17 Date of issue: 2025-02-17 Filename: 70128300\_eng.pdf

## Technical Data

<b>Input devices</b>	
Touch screen	10-finger multi-touch, glove friendly
<b>Interface</b>	
Interface type	USB touch screen signal, LVDS-video signal and inverter LCD backlight pins for VisuNet FLX computing unit connection
<b>Directive conformity</b>	
Electromagnetic compatibility	
Directive 2014/30/EU	DIN EN 55035:2018-04
RoHS	
Directive 2011/65/EU (RoHS)	EN IEC 63000:2018
<b>Ambient conditions</b>	
Operating temperature	0 ... 45 °C (32 ... 113 °F)
Storage temperature	-20 ... 65 °C (-4 ... 149 °F)
Relative humidity	max. relative humidity 93% at 40°C (non-condensing) according to EN60068-2-78
Shock resistance	18 shocks 15 g , 11 ms all axis, IEC 60068-2-27
Vibration resistance	10 ... 150 Hz, +/- 0.075 mm , 1g, 10 cycles per axis according to EN60068-2-6
<b>Mechanical specifications</b>	
Degree of protection	Front side: IP66 Back side: IP20 (when mounted to the computing unit from Pepperl+Fuchs)
Material	Front bezel: Stainless steel AISI304 (glass, silicone gasket) Backside: Painted aluminum sheet metal
Surface	front: glass (optional with stainless steel bezel)
Mass	approx. 6 kg
Dimensions	567 mm x 358 mm x 23.5 mm
Cut out dimensions	535 mm x 333.5 mm +/- 1 mm
<b>Data for application in connection with hazardous areas</b>	
Certificate	Please refer to the VisuNet FLX System and VisuNet FLX Panel documentation.