



## Relay Module

### KCD0-RSH-1.1D.1


- 1-channel signal conditioner
- 24 V DC supply (loop powered)
- Logic input 19 V DC ... 26.5 V DC, non-polarized
- Relay contact output for de-energized to safe function
- Test pulse immunity
- Up to SIL 3 acc. to IEC/EN 61508
- Up to PL e acc. to EN/ISO 13849

# CE SIL3 PL e

## Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. The device is a relay module that is suitable for safely switching applications of a load circuit. The device isolates load circuits up to 230 V AC and the 24 V DC control circuit. The de-energized to safe (DTS) function is permitted for SIL 3 and PL e applications. For testing of the relays, test terminals can be used. The test mode will be indicated by a LED. The output is protected against contact welding by a fuse.

## Connection

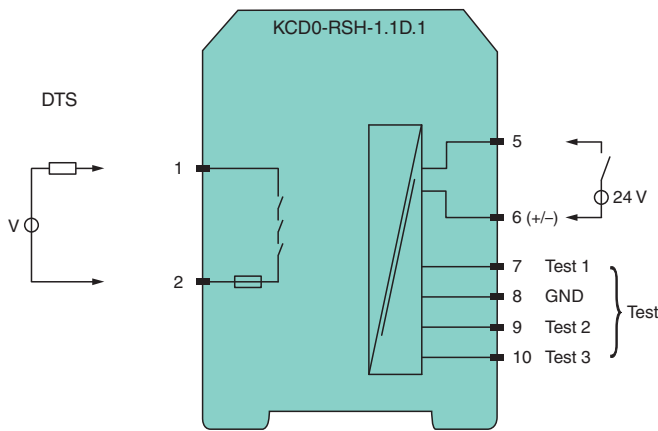

## Technical Data

### General specifications

Signal type Digital Output

### Functional safety related parameters

Safety Integrity Level (SIL) SIL 3

Systematic capability (SC) SC 3

Performance level (PL) PL e

### Supply

Connection loop powered

Rated voltage  $U_r$  19 ... 30 V DC loop powered

Power dissipation < 1.3 W

Power consumption < 1.3 W


### Input

## Technical Data

Connection side		control side
Connection		Input terminals 5, 6 ; test input terminals 7, 8, 9, 10
Pulse/Pause ratio		150 ms / 150 ms
Test pulse length		max. 4 ms from DO card
Test input		see functional safety manual
Signal level		0-signal: -5 ... 5 V 1-signal: 19 ... 26.5 V
Rated current	$I_r$	0-signal: typ. 1.6 mA at 1.5 V DC; typ. 8 mA at 3 V DC (maximum leakage current DO card) 1-signal: $\geq 36$ mA (minimum load current DO card)
<b>Output</b>		
Connection side		field side
Connection		terminals 1, 2
Contact loading		253 V AC/3 A/cos $\phi$ 0.7; 30 V DC/3 A resistive load 253 V AC / 1/8 HP
Minimum switch current		10 mA / 24 V DC
Energized/De-energized delay		150 ms / 150 ms
Mechanical life		5 x 10 <sup>6</sup> switching cycles
<b>Transfer characteristics</b>		
Switching frequency		< 3 Hz
<b>Galvanic isolation</b>		
Input/Output		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V <sub>eff</sub>
<b>Indicators/settings</b>		
Display elements		LEDs
Labeling		space for labeling at the front
<b>Directive conformity</b>		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Low voltage		
Directive 2014/35/EU		EN 61010-1:2010
Machinery Directive		
Directive 2006/42/EC		EN IEC 62061:2021 , EN/ISO 13849-1:2015
<b>Conformity</b>		
Electromagnetic compatibility		NE 21:2012 , EN 61326-3-1:2008 , EN 61326-3-2:2008
Degree of protection		IEC 60529:2013
<b>Ambient conditions</b>		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F) Observe the temperature range limited by derating, see section derating.
<b>Mechanical specifications</b>		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		12.5 x 119 x 114 mm (0.5 x 4.7 x 4.5 inch) (W x H x D) , housing type A2
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>General information</b>		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

**Assembly**

Front view

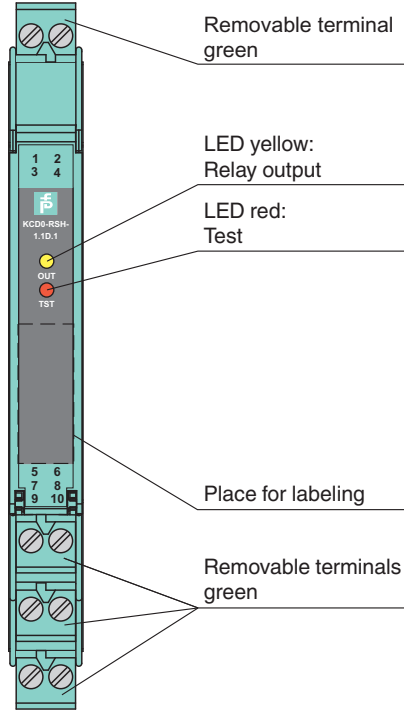

Removable terminal green

LED yellow:  
Relay output


LED red:  
Test

Place for labeling

Removable terminals green

**Characteristic Curve**


**Derating**

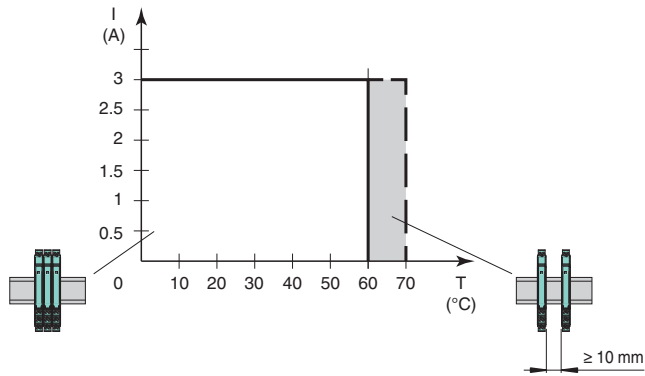

— fused  
 - - - fused, 10 mm  
 $U_i$  26.5 V

**Characteristic Curve**

**Maximum Switching Power of Output Contacts**

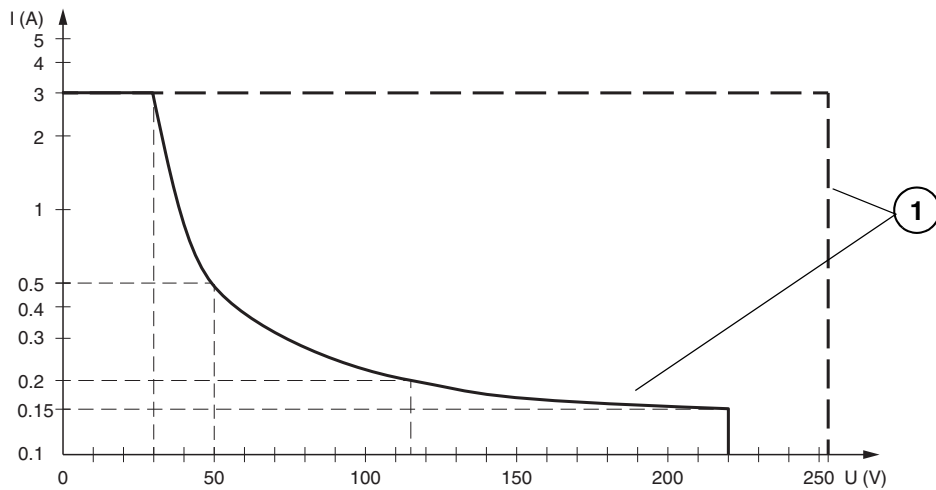

— Resistive load DC  
 - - - Resistive load AC  
**1** max.  $3 \times 10^4$  switching cycles

Release date: 2024-09-04 Date of issue: 2024-09-04 Filename: 70131898\_eng.pdf