


# Inductive sensor


## NJ15-30GK-N-10M



- 15 mm non-flush
- Usable up to SIL 2 acc. to IEC 61508
- NAMUR output
- 10 m connection cable

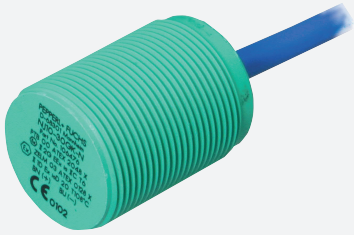

### Dimensions

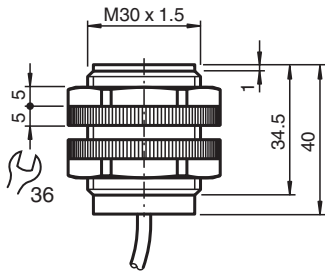

### Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	$s_n$	15 mm
Installation		non-flush
Assured operating distance	$s_a$	0 ... 12.15 mm
Reduction factor $r_{AI}$		0.4
Reduction factor $r_{Cu}$		0.3
Reduction factor $r_{304}$		0.85
Output type		2-wire
Nominal ratings		
Nominal voltage	$U_o$	8.2 V ( $R_i$ approx. 1 k $\Omega$ )
Switching frequency	$f$	0 ... 100 Hz
Current consumption		
Measuring plate not detected		min. 3 mA
Measuring plate detected		$\leq$ 1 mA
Functional safety related parameters		

Release date: 2025-06-13 Date of issue: 2025-06-17 Filename: 70133074\_eng.pdf

## Technical Data

Safety Integrity Level (SIL)	SIL 2	
MTTF <sub>d</sub>	4560 a	
Mission Time (T <sub>M</sub> )	20 a	
Diagnostic Coverage (DC)	0 %	
<b>Compliance with standards and directives</b>		
Standard conformity		
NAMUR	EN 60947-5-6:2000 IEC 60947-5-6:1999	
Standards	EN IEC 60947-5-2	
<b>Approvals and certificates</b>		
IECEX approval		
Equipment protection level Gb	IECEX PTB 11.0037X	
Equipment protection level Da	IECEX PTB 11.0037X	
Equipment protection level Mb	IECEX PTB 11.0037X	
ATEX approval		
Equipment protection level Gb	PTB 00 ATEX 2048 X	
Equipment protection level Da	PTB 00 ATEX 2048 X	
UL approval	cULus Listed, General Purpose	
CCC approval		
Hazardous Location	2020322315002255	
CML approval	on request	
ANZEx	18.3018X	
KCC approval		
Hazardous Location	19-AV4BO-0227	
<b>Ambient conditions</b>		
Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)	
<b>Mechanical specifications</b>		
Connection type	cable	
Housing material	PBT	
Sensing face	PBT	
Degree of protection	IP66 / IP68	
<b>Cable</b>		
Cable diameter	6 mm ± 0.2 mm	
Bending radius	> 10 x cable diameter	
Material	PVC	
Core cross section	0.75 mm <sup>2</sup>	
Length	L	10 m
<b>Dimensions</b>		
Length	40 mm	
Diameter	30 mm	
<b>General information</b>		
Scope of delivery	Supplied with 2 nuts	
Use in the hazardous area	see instruction manuals	

## Connection Assignment

