

# Inductive sensor


## NBN40-U1K-N0



- 40 mm non-flush
- Sensor head bidirectional and rotatable
- NAMUR output
- Polarity reversal protected



### Dimensions

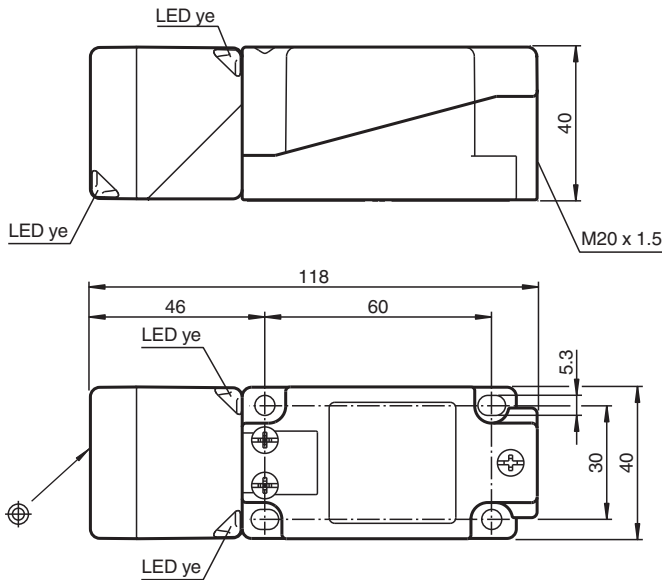

### Technical Data

#### General specifications

|                            |       |                      |
|----------------------------|-------|----------------------|
| Switching function         |       | Normally closed (NC) |
| Output type                |       | NAMUR                |
| Rated operating distance   | $s_n$ | 40 mm                |
| Installation               |       | non-flush            |
| Assured operating distance | $s_a$ | 0 ... 32.4 mm        |
| Actual operating distance  | $s_r$ | 36 ... 44 mm         |
| Reduction factor $r_{Al}$  |       | 0.45                 |
| Reduction factor $r_{Cu}$  |       | 0.45                 |
| Reduction factor $r_{304}$ |       | 0.8                  |
| Output type                |       | 2-wire               |

#### Nominal ratings

|                     |       |                                      |
|---------------------|-------|--------------------------------------|
| Nominal voltage     | $U_o$ | 8.2 V ( $R_i$ approx. 1 k $\Omega$ ) |
| Switching frequency | $f$   | 0 ... 100 Hz                         |

Release date: 2025-06-12 Date of issue: 2025-06-14 Filename: 70133100\_eng.pdf

## Technical Data

|   |   |  |
|---|---|--|
| Hysteresis                                      | H | 1 ... 15 % typ. 5 %  |
| Reverse polarity protection                     |   | reverse polarity protected   |
| Short-circuit protection                        |   | yes  |
| Current consumption                             |   |  |
| Measuring plate not detected                    |   | ≥ 3 mA   |
| Measuring plate detected                        |   | ≤ 1 mA   |
| Switching state indicator                       |   | LED, yellow  |
| <b>Functional safety related parameters</b>     |   |  |
| MTTF <sub>d</sub>                               |   | 1415 a   |
| Mission Time (T <sub>M</sub> )                  |   | 20 a   |
| Diagnostic Coverage (DC)                        |   | 0 %  |
| <b>Compliance with standards and directives</b> |   |  |
| Standard conformity                             |   |  |
| NAMUR   |   | EN 60947-5-6:2000<br>IEC 60947-5-6:1999  |
| Electromagnetic compatibility                   |   | NE 21:2007   |
| Standards                                       |   | EN IEC 60947-5-2   |
| <b>Approvals and certificates</b>               |   |  |
| IECEX approval                                  |   |  |
| Equipment protection level Ga                   |   | IECEX PTB 11.0021X   |
| Equipment protection level Gb                   |   | IECEX PTB 11.0021X   |
| Equipment protection level Da                   |   | IECEX PTB 11.0021X   |
| Equipment protection level Mb                   |   | IECEX PTB 11.0021X   |
| ATEX approval                                   |   |  |
| Equipment protection level Ga                   |   | PTB 00 ATEX 2032 X   |
| Equipment protection level Gb                   |   | PTB 00 ATEX 2032 X   |
| Equipment protection level Da                   |   | PTB 00 ATEX 2032 X   |
| UL approval                                     |   |  |
| Ordinary Location                               |   | E87056   |
| Hazardous Location                              |   | E501628  |
| Control drawing                                 |   | 116-0451   |
| CCC approval                                    |   |  |
| Hazardous Location                              |   | 2020322315002303   |
| NEPSI approval                                  |   |  |
| NEPSI certificate                               |   | GYJ16.1394X  |
| CML approval                                    |   | on request   |
| ANZEx   |   | 19.3001X   |
| Marine approval                                 |   | DNVGL TAA00001A5   |
| <b>Ambient conditions</b>                       |   |  |
| Ambient temperature                             |   | -25 ... 100 °C (-13 ... 212 °F)  |
| Storage temperature                             |   | -40 ... 100 °C (-40 ... 212 °F)  |
| <b>Mechanical specifications</b>                |   |  |
| Connection type                                 |   | screw terminals  |
| Information for connection                      |   | A maximum of two conductors with the same core cross section may be mounted on one terminal connection!<br>tightening torque 1.2 Nm + 10 % |
| Core cross section                              |   | up to 2.5 mm <sup>2</sup> , stripped insulation length: 7 mm   |
| Minimum core cross-section                      |   | without wire end ferrules 0.5 mm <sup>2</sup> , with connector sleeves 0.34 mm <sup>2</sup>  |
| Maximum core cross-section                      |   | without wire end ferrules 2.5 mm <sup>2</sup> , with connector sleeves 1.5 mm <sup>2</sup>   |
| Connection (system side)                        |   | screw terminals, M20 x 1.5 cable gland, usable thread length 9.1 mm, screw-in depth max. 9.1 mm  |
| Housing material                                |   | PA   |
| Sensing face                                    |   | PA   |
| Degree of protection                            |   | IP66 / IP68 / IP69K  |

## Technical Data

|                            |                                     |
|----------------------------|-------------------------------------|
| Mass                       | 225 g                               |
| Dimensions                 |                                     |
| Height                     | 40 mm                               |
| Width                      | 40 mm                               |
| Length                     | 118 mm                              |
| Note                       | Tightening torque: 1.8 Nm (housing) |
| <b>General information</b> |                                     |
| Use in the hazardous area  | see instruction manuals             |

## Connection Assignment

