


Inductive sensor


NJ15-30GK-N-Y08943



- 15 mm non-flush
- NAMUR output

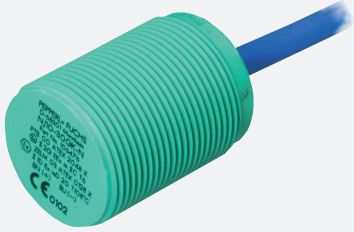

Dimensions

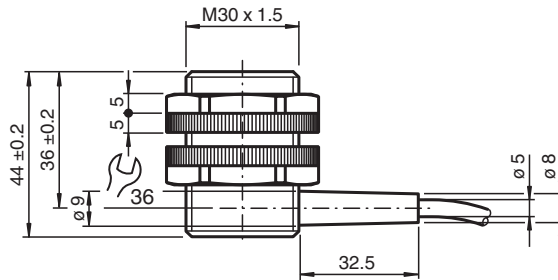

Technical Data

General specifications		
Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	s_n	15 mm
Installation		non-flush
Assured operating distance	s_a	0 ... 12.15 mm
Reduction factor r_{AI}		0.4
Reduction factor r_{Cu}		0.3
Reduction factor r_{304}		0.85
Output type		2-wire
Nominal ratings		
Nominal voltage	U_o	8.2 V (R_i approx. 1 k Ω)
Switching frequency	f	0 ... 100 Hz
Hysteresis	H	1 ... 5 % typ. 3 %
Current consumption		
Measuring plate not detected		min. 3 mA
Measuring plate detected		≤ 1 mA

Release date: 2024-12-11 Date of issue: 2024-12-11 Filename: 70133320_eng.pdf

Technical Data

Compliance with standards and directives

Standard conformity	
NAMUR	EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards	EN IEC 60947-5-2

Approvals and certificates

IECEX approval	
Equipment protection level Gb	IECEX PTB 11.0037X
Equipment protection level Da	IECEX PTB 11.0037X
Equipment protection level Mb	IECEX PTB 11.0037X
ATEX approval	
Equipment protection level Gb	PTB 00 ATEX 2048 X
Equipment protection level Da	PTB 00 ATEX 2048 X
UL approval	cULus Listed, General Purpose
CML approval	on request
ANZEx	18.3018X

Ambient conditions

Ambient temperature	-25 ... 100 °C (-13 ... 212 °F)
---------------------	---------------------------------

Mechanical specifications

Connection type	cable
Housing material	PBT
Sensing face	PBT
Degree of protection	IP68
Cable	
Wire end ferrules	yes
Cable diameter	6 mm ± 0.2 mm
Bending radius	> 10 x cable diameter
Material	PVC
Color	blue
Number of cores	2
Core cross section	0.75 mm ²
Length	L 2 m
Dimensions	
Length	44 mm
Diameter	30 mm

General information

Use in the hazardous area	see instruction manuals
---------------------------	-------------------------

Connection

