




## WCS2 Code rail

WCS2-CS55-M1-S091000-L036000

- Flexible installation by means of alu profile- or mounting bracket system
- High mechanical stability
- Suitable for applications with wide temperature variations

Code rail, stainless steel

### Dimensions

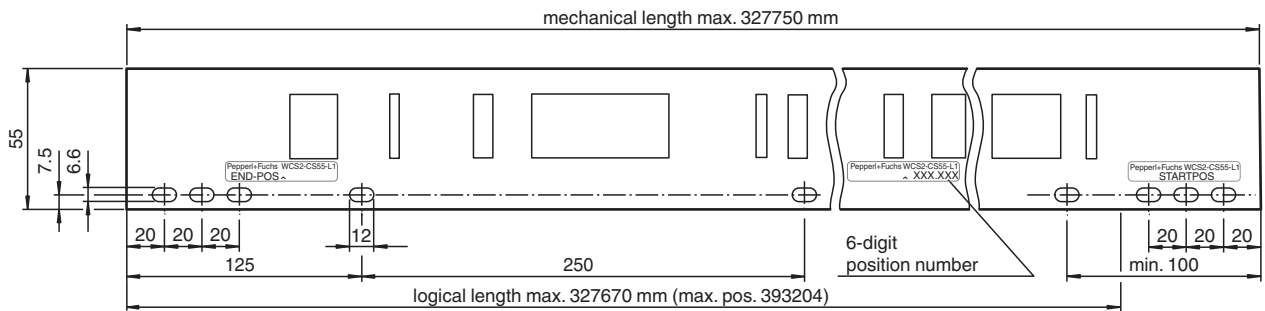

### Technical Data

#### General specifications

Code rail height	55 mm
Total length	36000 mm
Start position	91000 mm
Radius of bend	≥ 500 mm


#### Ambient conditions

Operating temperature	-40 ... 100 °C (-40 ... 212 °F)
Storage temperature	-40 ... 100 °C (-40 ... 212 °F)
Installation temperature	10 ... 60 °C (50 ... 140 °F)

#### Mechanical specifications

Material thickness	0.5 mm
Tension loading	≤ 4500 N
Material	stainless steel 1.4310 / AISI 301
Thermal expansion coefficient	1.6 x 10 <sup>-5</sup> / K
Mass	175 g / m
Manufacturing tolerance	± 1 mm/m

## Mounting

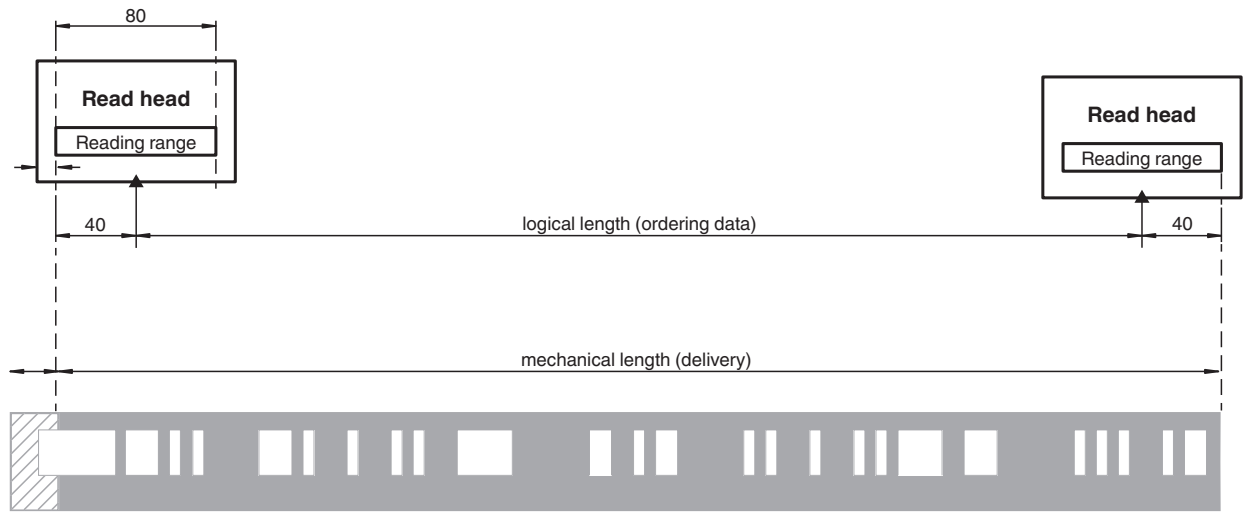

Automatic length correction:  
Code rail is only delivered with  
web ends or web beginnings



## Type Code

### Structure of the type code

W	C	S	2	-	C	S	(1)	-	M	1	-	S	(2)	(2)	(2)	(2)	(2)	(2)	-	L	(3)	(3)	(3)	(3)	(3)	(3)
---	---	---	---	---	---	---	-----	---	---	---	---	---	-----	-----	-----	-----	-----	-----	---	---	-----	-----	-----	-----	-----	-----









WCS2	Read head type
WCS	Position encoding system
CS	Code rail
C	Code
S	Rail
(1)	Code rail height
55	Code rail height
70	Code rail height
M	Code rail material
M	Stainless steel
1	Mounting hole type
1	With mounting holes
S (2) (2) (2) (2) (2) (2)	Starting position
0 ... 327570	Starting position of the code rail in mm
L (3) (3) (3) (3) (3) (3)	Code rail length
100 ... 327670	Length of the code rail in mm

## Accessories

	<b>WCS-MT1</b>	Tensioning device for stainless steel code rail
	<b>WCS-MF1</b>	Wrist strap

Release date: 2023-03-09 Date of issue: 2023-03-09 Filename: 70135876-100002\_eng.pdf

## Accessories

	<b>WCS2-FT1</b>	Mounting tool to safely and quickly install the 55 mm code strip in the aluminum profile
	<b>WCS2-GT09-M1</b>	WCS2 guiding trolley
	<b>WCS2-LB1-C</b>	WCS2 locking bracket
	<b>WCS2-MC2</b>	Butt connector, stainless steel
	<b>WCS2-MH1</b>	Rail bracket with screwed connection
	<b>WCS2-MH2</b>	Rail bracket with screwed connection for C profile rails
	<b>WCS2-PS1-2,5M</b>	WCS2 profile rail
	<b>WCS2-PS1-C-2,5M</b>	WCS2 profile rail, coated