


# AS-Interface flat cable VAZ-FK-S-GY-2,5MM

- Cable piercing technique
- Resistant to environmental influence
- Resistant to bending
- Reverse polarity protected due to the shape of the cable
- Halogen-free (PVC-free)
- Does not give off silicone
- Graduations in meters

AS-Interface flat cable for 48 V



## Dimensions

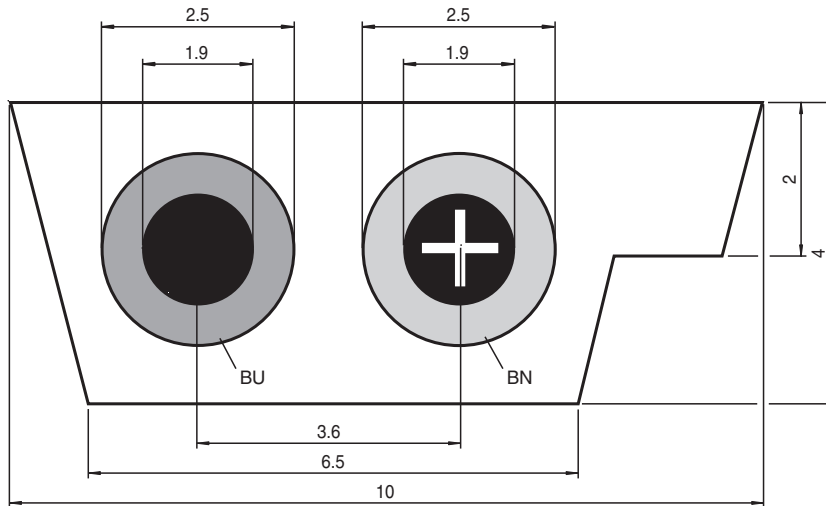

## Technical Data

Electrical specifications		
Nominal voltage	$U_N$	48 V
Current loading capacity		According to DIN VDE 0298 Part 4, Table 6, Column 4
Ambient conditions		
Conductor temperature		Operating mode: 90 °C (363 K) Short-circuit: 200 °C (473 K)
Ambient temperature		
Cable, fixed installation		-40 ... 85 °C (-40 ... 185 °F)
Cable, flexing		-25 ... 85 °C (-13 ... 185 °F)
Mechanical specifications		
Core cross section		Copper, extra-fine wire, class 6 in accordance with DIN VDE 0295 cross-section 2.5 mm <sup>2</sup>
Bending radius		min. permissible bend radii in accordance with DIN VDE 0298 Part 3, Table 2 Bending stress only permitted on the wide side of the cable
Tension loading		max. 50 N/mm <sup>2</sup> on laying acc. to DIN VDE 0298 Part 3
Material		Thermoplastic Elastomer (TPE) Rubber compound EM3, based on DIN VDE 0207 Part 21
Core insulation		Thermoplastic Elastomer (TPE)

Release date: 2025-05-22 Date of issue: 2025-05-22 Filename: 70144549\_eng.pdf

**Technical Data**

Cable	
Sheath color	grey
Number of cores	2
Cores color	Core 1: brown Core 2: blue
Cable length	100 m
Note	The cable is intended for use as a bus power line in inside areas. Only cable with a black sheathing is suitable for outside use.