


AS-Interface flat cable VAZ-FK-PUR-GY-2,5MM

- Oil resistant
- Cable piercing technique
- Resistant to environmental influence
- Resistant to bending
- Suitable for drag chains and abrasion resistant
- Reverse polarity protected due to the shape of the cable
- halogen-free, flame-proof outer shell on PUR basis

AS-Interface flat cable for 48 V



Dimensions

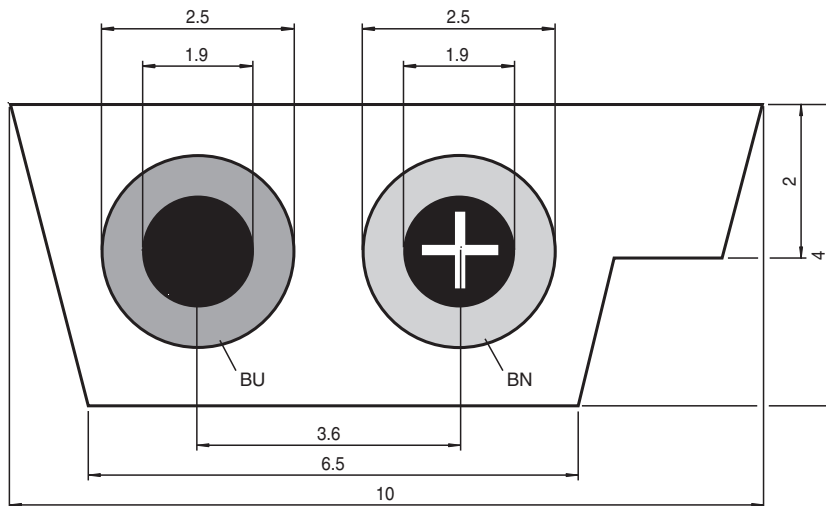

Technical Data

General specifications		
UL File Number	E310133	
Electrical specifications		
Nominal voltage	U_N	48 V
Current loading capacity	According to DIN VDE 0298 Part 4, Table 6, Column 4	
Ambient conditions		
Ambient temperature		
Cable, fixed installation	-40 ... 85 °C (-40 ... 185 °F)	
Cable, flexing	-25 ... 85 °C (-13 ... 185 °F)	
Mechanical specifications		
Core cross section	Copper, extra-fine wire, class 6 in accordance with DIN VDE 0295 cross-section 2.5 mm ²	
Bending radius	min. 50 mm min. permissible bending radii according to DIN VDE 0298 Part 3, Table 2 Bending stress only permissible on the wide side of the cable	
Tension loading	max. 50 N/mm ² on laying acc. to DIN VDE 0298 Part 3	
Material		
Core insulation	Thermoplastic Elastomer (TPE)	

Release date: 2025-06-03 Date of issue: 2025-06-10 Filename: 70144550_eng.pdf

Technical Data

Cable	UL style 20549/10493
Bending radius	> 60 mm
Sheath color	grey
Number of cores	2
Cores color	Core 1: brown Core 2: blue
Drag chain suitability	
Drag chain cycles	min. 10000000
Motion velocity	max. 4 m/s
Traverse distance	10 m
Acceleration	max. 4 m/s ²
Torsion cycles	min. 10 mio
Torsional stress	± 180 °/0.5 m
Cable length	100 m
Flammability	
Cable	Flame-retardant as per IEC 60332-1-2
Note	General weather resistance: Ozone and UV resistant