



## Surge Protection Barrier

### M-LB-2646


- Surge protection for 3 signal lines
- Nominal voltage 24 V DC
- Surge protection barrier for grounded signal lines
- Max. surge current (8/20  $\mu$ s) 20 kA
- Connection via screw terminals
- DIN rail mountable
- Up to SIL 3 acc. to IEC/EN 61508

# CE SIL3

### Function

The device limits induced transients of different causes, e. g. lightning or switching operations. The limitation is achieved by diverting the current to earth and limiting the signal loop voltage during the duration of the overvoltage pulse. The device is mounted on a 35 mm DIN mounting rail according to EN 60715.

### Wiring Diagram

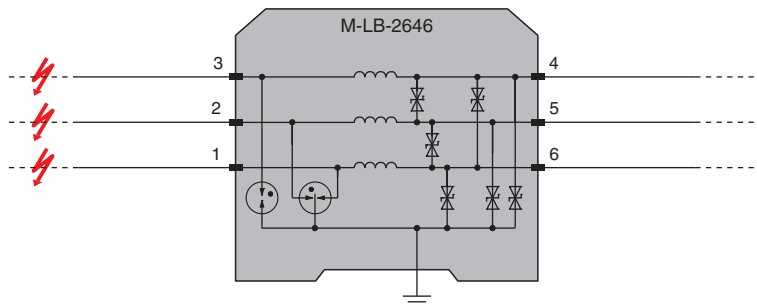

### Technical Data

#### General specifications


Number of protected signal lines	3
Topology	grounded
<b>Functional safety related parameters</b>	
Safety Integrity Level (SIL)	SIL 3
<b>Electrical specifications</b>	
Connection	protected area: terminals 4, 5, 6 unprotected area: terminals 1, 2, 3
Rated current	$I_r$ 400 mA , restrictions see derating tables
Leakage current	< 6 $\mu$ A at 24 V and 25 °C (77 °F) , line-line
Nominal voltage	$U_N$ 24 V DC
Maximum continuous operating voltage	$U_c$ 30 V DC

## Technical Data

Series resistance		≤ 3 Ω per line
Impulse rating		1 kV/0.5 kA (category C1) 10 kV/5 kA (category C2) 1 kA (category D1)
Impulse discharge current (10/350 μs)	$I_{imp}$	1 kA per line (2x)
Nominal discharge current (8/20 μs)	$I_n$	5 kA per line (10x)
Total discharge current (8/20 μs)	$I_{total}$	20 kA (1x) , overstressed fault mode 3 acc. to IEC 61643-21
Voltage protection level	$U_p$	max. 45 V line-line for nominal discharge current $I_n$ max. 60 V line-earth for nominal discharge current $I_n$
Impulse reset time		< 500 ms
Insertion loss		≤ 3 dB at 0 ... 480 kHz in 100 Ω system
<b>Conformity</b>		
Electromagnetic compatibility		EN 61326-3-1:2017
Degree of protection		IEC 60529:2013
Functional safety		IEC/EN 61508:2010
Surge protective devices for low voltage		IEC 61643-21:2000+A1:2008+A2:2012
<b>Ambient conditions</b>		
Ambient temperature		-40 ... 80 °C (-40 ... 176 °F) Observe the temperature range limited by derating, see section derating.
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		max. 95 % , without condensation
Corrosion resistance		acc. to ISA-71.04, severity level G3
<b>Mechanical specifications</b>		
Degree of protection		IP20 , after mounting of the insulation spacer
Connection		screw terminals , max. core cross section 1 x 2.5 mm <sup>2</sup>
Material		Polyamide (PA)
Mass		approx. 30 g
Dimensions		6.2 x 93 x 71,8 mm (0.24 x 3.7 x 2.8 inch) (W x H x D)
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
<b>General information</b>		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see <a href="http://www.pepperl-fuchs.com">www.pepperl-fuchs.com</a> .

Assembly

Front view

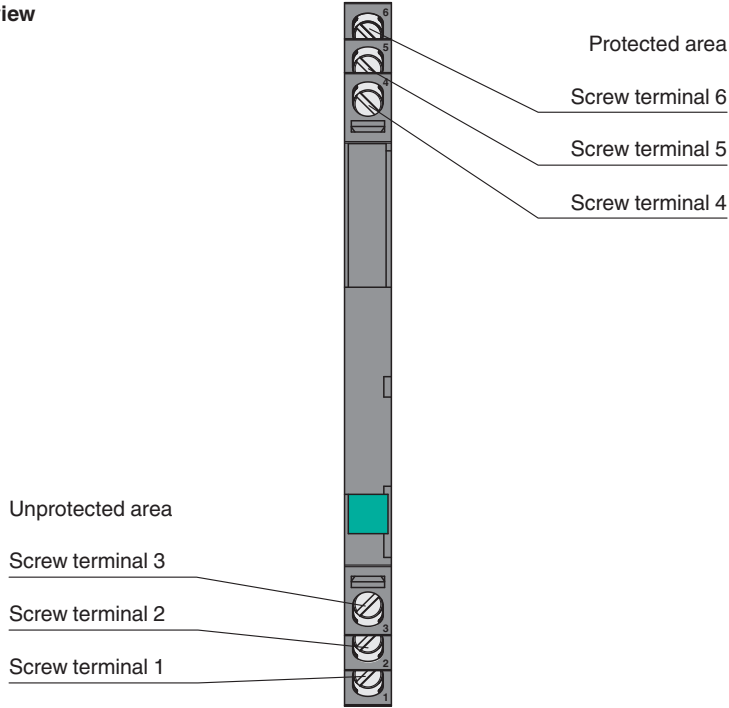

Release date: 2025-07-10 Date of issue: 2025-07-10 Filename: 70152558\_eng.pdf

## Operation

### Derating of the Rated Current


This derating applies for mounting under regular conditions.

Max. ambient temperature	30 °C	40 °C	50 °C	60 °C	70 °C	80 °C
$I_r$	350 mA	300 mA	250 mA	200 mA	140 mA	80 mA

Linear interpolation allowed, extrapolation not allowed.

This derating applies for mounting under following special conditions.

The increased rated current of 400 mA is only applicable for a device (1) if the current in at least 6 adjacent devices (2) from both sides of the device is < 80 % of the increased current, see figure.

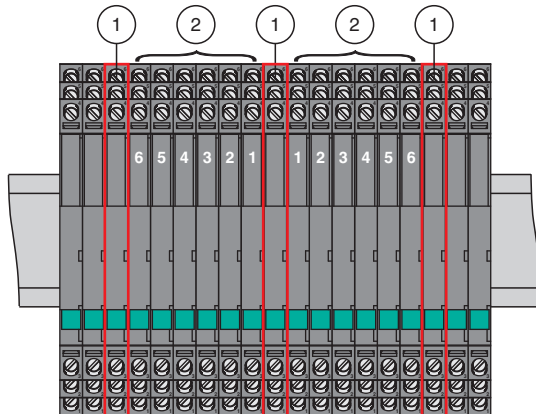

Max. ambient temperature	30 °C	40 °C	50 °C	60 °C	70 °C	80 °C
$I_r$	400 mA	340 mA	270 mA	210 mA	140 mA	80 mA

Linear interpolation allowed, extrapolation not allowed.



*In the case of a short circuit, the rated current must not be exceeded.*