

# USi-industry evaluation unit

## USIS-F264-IU3E5-V19



- Evaluation unit for ultrasonic transducers with elliptic sound field
- Object detection in the near range
- Multiple device installation possible, no mutual interference (no cross-talk)
- Adjustable sound cone
- Temperature compensation
- Parameterizable input, e.g. for switching between two parameter sets

Evaluation unit for the ultrasonic sensor system USi-industry with analog and switching outputs (stand-alone device/secondary device)



### Function

The USi-industry ultrasonic sensor system is used in applications for object detection, area monitoring and distance measurement, for example on machines and systems. It is also used as an assistance system on mobile machines such as robots and driverless transport systems (AGVs) for collision avoidance both indoors and outdoors. The evaluation unit and the ultrasonic transducers to be connected to it are separate units. This enables a high degree of flexibility and a wide range of applications, so that even the smallest installation spaces can be used for ultrasonic sensor technology.

Up to 2 ultrasonic transducers with an elliptical sound field can be connected to the evaluation unit and freely positioned. Each ultrasonic transducer is assigned 2 outputs. The evaluation unit has a total of 4 outputs as well as 1 digital input and 1 synchronization line, all of which can be parameterized individually and independently of each other and integrated into a wide variety of applications. All types of USi-industry evaluation units are delivered as stand-alone devices and are therefore equivalent, regardless of whether they are main devices or secondary devices. Even without an electrical connection, several individual devices can be operated together without interference by means of special parameterization.

The digital input can be defined for one of the following functions, either


- to switch off the outputs or
- to switch to another parameter set without interruption or
- for teaching in a changing environment during operation.

The teach-in button can be used to

- teach in the environment of the detection area,
- set the switching points,
- log the second ultrasonic transducer on or off and
- reset the evaluation unit to the factory settings.

Complete parameterization is conveniently carried out using the Device Type Manager (DTM) under PACTware via the integrated USB interface. These parameters define the inputs and outputs, switching points and operating modes, sensor and ultrasound-specific values as well as synchronization options and temperature compensation, as well as synchronization options and temperature compensation.

## Dimensions

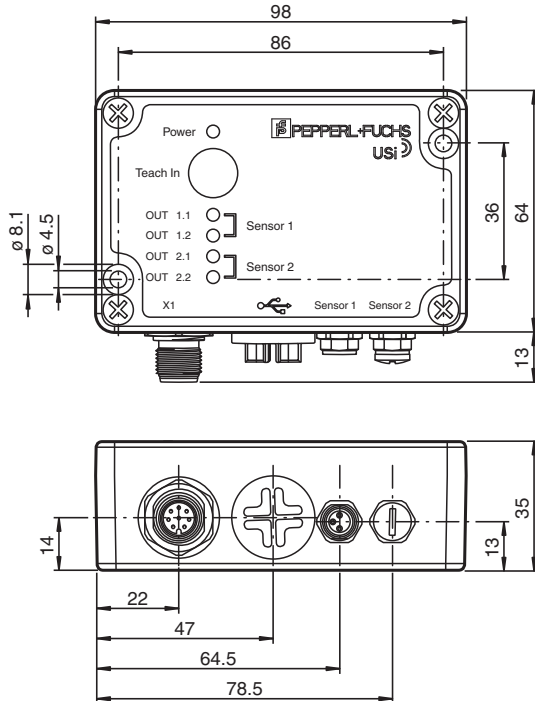

## Technical Data

### General specifications

Type	USi-industry evaluation unit	
Sensing range	10 ... 2500 mm factory setting: 2000 mm	
Adjustment range	150 ... 2500 mm	
Dead band	0 ... 10 mm	
Object size	typ. $\varnothing$ 10 mm	
Transducer frequency	approx. 103 kHz	
Response delay	10 ... 20000 ms factory setting: 150 ms	
Sensor cycle time	10 ... 200 ms factory setting: 50 ms	
Resolution	1 mm	
Target velocity	axial (max.): typ. 2 m/s (up to 2.5 m/s)	
Repeat accuracy	$\pm 0.1$ % of full-scale value	
Temperature influence	automatic or manual temperature compensation available , without temperature compensation: 0.17 %/K	

### Indicators/operating means

LED green	supply voltage/device status
LED yellow	output states
Button	Teach-in

### Electrical specifications

Operating voltage	$U_B$	9 ... 30 V DC
No-load supply current	$I_0$	$\leq 160$ mA
Power consumption	$P_0$	$< 2.5$ W
Time delay before availability	$t_v$	$\leq 300$ ms

### Interface

Interface type	USB 2.0
----------------	---------

### Inputs

## Technical Data

Input type	2 inputs for ultrasonic transducers 1 digital input
<b>Output 1</b>	
Designation	OUT 1.1
Output type	1 analog output 4 ... 20 mA or 1 analog output 0 ... 10 V
Deviation of the characteristic curve	± 1 % of the full-scale value
Load resistor	current output: ≤ 500 Ω voltage output: ≥ 1000 Ω
<b>Output 2</b>	
Designation	OUT 1.2
Output type	switching output: PNP Normally open/closed (NO/NC) parameterizable
Voltage drop	≤ 2.5 V
Switching frequency	0.05 Hz ... 100 Hz
Off-state current	≤ 100 μA
Switching voltage	max. U <sub>B</sub>
Switching current	100 mA
<b>Output 3</b>	
Designation	OUT 2.1
Output type	switching output: PNP Normally open/closed (NO/NC) parameterizable
Voltage drop	≤ 2.5 V
Switching frequency	0.05 Hz ... 100 Hz
Off-state current	≤ 100 μA
Switching voltage	max. U <sub>B</sub>
Switching current	100 mA
<b>Output 4</b>	
Designation	OUT 2.2
Output type	switching output: PNP Normally open/closed (NO/NC) parameterizable
Voltage drop	≤ 2.5 V
Switching frequency	0.05 Hz ... 100 Hz
Off-state current	≤ 100 μA
Switching voltage	max. U <sub>B</sub>
Switching current	100 mA
<b>Compliance with standards and directives</b>	
Standard conformity	
Standards	EN IEC 60947-5-2:2020 IEC 60947-5-2:2019 EN 60947-5-7:2003 IEC 60947-5-7:2003 EN 55011:2016-04
<b>Approvals and certificates</b>	
CCC approval	CCC approval / marking not required for products rated ≤36 V
<b>Ambient conditions</b>	
Ambient temperature	-30 ... 70 °C (-22 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
<b>Mechanical specifications</b>	
Connection type	Connector plug
Degree of protection	IP65
Connection	for power supply and outputs: connector plug M12, 8-pin, connection line max. 30 m for ultrasonic transducer: for each socket M8, 3-pin for parameterization: socket Mini USB
Material	
Housing	diecast aluminum
Mass	250 g
Dimensions	


### Technical Data

Height	35 mm
Width	77 mm
Length	98 mm

### Connection


Connector X1	Signal	Pin
Power supply	+U <sub>S</sub> , -U <sub>S</sub>	2, 7
Output 1.1	OUT 1.1	1
Output 1.2	OUT 1.2	3
Output 2.1	OUT 2.1	4
Output 2.2	OUT 2.2	5
Digital input	IN	6
Synchronization	SYNC	8

### Connection Assignment



### Characteristic Curve

Characteristic response curve

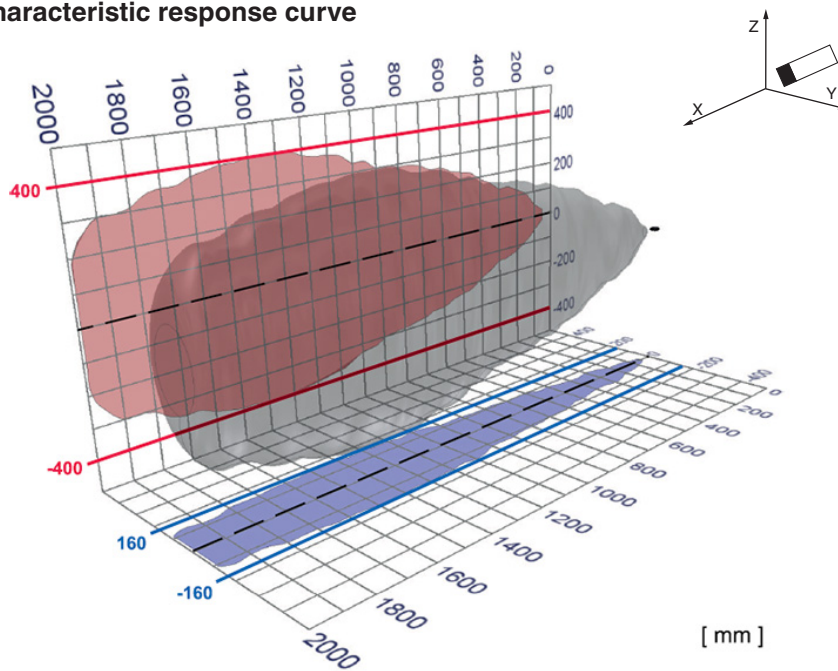

### Additional Information

**Further Documentation**

There is a manual for commissioning, parameterization and use of the device which you can download from the product page at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).

Release date: 2025-06-24 Date of issue: 2025-06-24 Filename: 70154478\_eng.pdf

## Accessories

The ultrasonic sensor system USi-industry consists of several components. At least 1 ultrasonic transducer is required to operate an evaluation unit. These are available in versions with different cable lengths. Various mounting brackets, connection and USB cables are also available. Accessories for this product can be found on the internet at [www.pepperl-fuchs.com](http://www.pepperl-fuchs.com).