




Ethernet switch unmanaged ICRL2-U-5RJ45-DIN

- Five - 10/100BASE-TX ports
- Rugged housing for use in harsh environments
- Suitable for PROFINET IO and EtherNet/IP
- Extended temperature range

Ethernet unmanaged switch with 5 RJ45 ports and extended temperature range



Dimensions

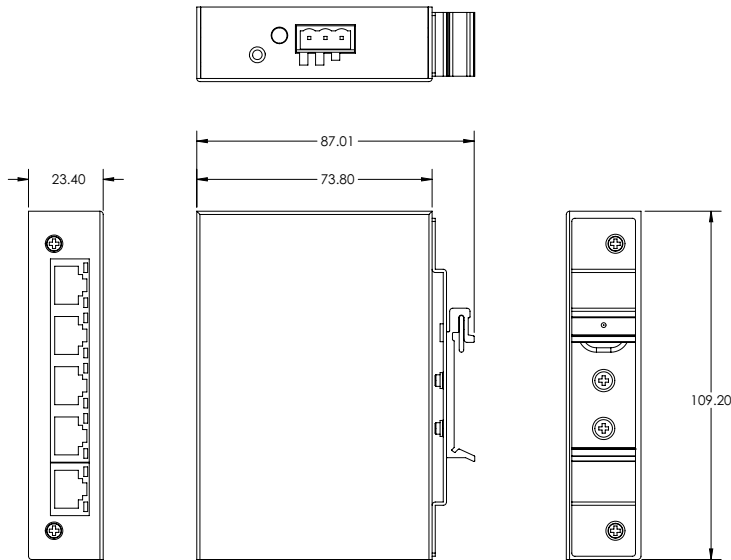

Technical Data

General specifications


UL File Number	E223772
MTBF	67.9 a
Ethernet Interface	
Number of ports	5
Auto-MDI(-X)	yes
Autonegotiation	yes
Ethernet Interface	Industrial Ethernet
Transfer rate	10BASE-T, 100BASE-TX
Network performance	Jumbo frame size: 1552 bytes Broadcast storm protection for broadcast packet

Release date: 2024-09-04 Date of issue: 2024-09-04 Filename: 70156866_eng.pdf


Technical Data

Cable type		Category 5e or better
Switch properties		
MAC address table size		1K
Standards		
IEEE 802.3 10BASE-T		yes
IEEE 802.3u 100BASE-TX		yes
IEEE 802.3x Flow Control and Back-pressure		yes
Indicators/operating means		
LED indication		see manual
Electrical specifications		
Rated operating voltage	U _e	12 ... 48 V DC
Power consumption		3 W
General information		Current overload protection, Power input polarity protection
Nominal voltage		24 V DC
Current consumption		typ. 6 mA
Interface 1		
Physical		RJ45
Transfer rate		10/100 Mbps
Inputs/Outputs		
Number/Type		5 x RJ45
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 55011:2016-04 EN 55011/A1:2017-04 EN 55011/A11:2020-03 EN 55032:2015-07 EN 55032/A11:2020-03 EN 55035:2017-07 EN 55035/A11:2020-05
Standard conformity		
Electrical safety		CSA C22.2 No. 61010-1-12 UL 61010-1, IEC 61010-2-201
Emitted interference		EN 55032, FCC Part 15 Subpart B, ICES-003, AS/NZS CISPR 32
Noise immunity		EN 55035:2017/A11:2020
Shock resistance		EN 60068-2-27
Vibration resistance		IEC 60068-2-6
Ambient conditions		
Ambient temperature		-40 ... 75 °C (-40 ... 167 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		max. 95 %
Altitude		0 ... 3048 m
Mechanical specifications		
Degree of protection		IP30
Connection		Power Supply Terminal Block Ethernet 5 x RJ45
Material		
Housing		Aluminum
Mass		180 g
Dimensions		
Height		109.2 mm
Width		23.4 mm
Length		73.8 mm
Construction type		Cabinet module
Mounting		DIN rail or direct panel mounting

Connection

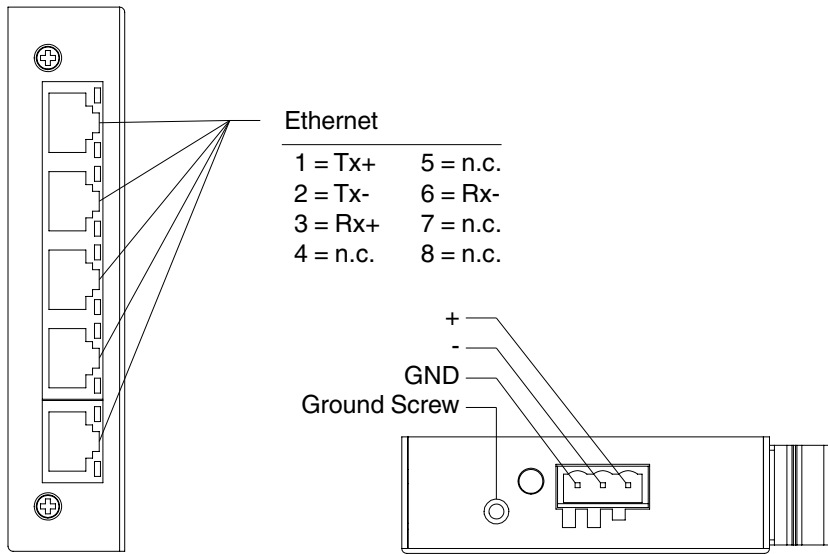

Indication

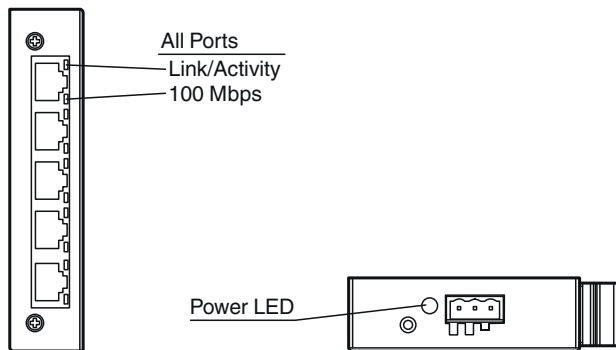

Release date: 2024-09-04 Date of issue: 2024-09-04 Filename: 70156866_eng.pdf