


Termination Board

HiCTB16-TRX-RAS-PL-AI16



- System board for Schneider Electric, Tricon CX series by Triconex
- For 32-channel (16+16) AI cards 3722X and 3723X
- For 16 modules
- Recommended modules: HiC2027 (AI), HiC2027ES (AI)
- 24 V DC supply
- Hazardous area: pluggable screw terminals, blue
- Non-hazardous area: screw terminals, black
- Non-hazardous area: ELCO socket, 56-pin
- Up to SIL 3 acc. to IEC/EN 61508

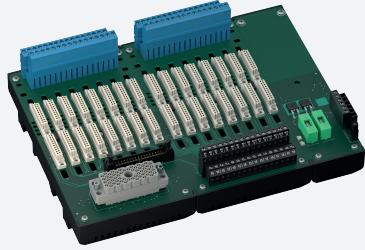


Function

The function of the termination board and the system connector pin assignment is exactly fitted to the requirements of the Triconex Tricon CX system.
 The signal is output to the safety instrumented system via the system connector and additionally via screw terminals (signal splitter function). Information about missing supply voltage of the isolated barriers is available for the system at the volt-free transistor output. Wiring faults from the field side will be reported via the volt-free transistor output, if this function is supported by the isolators. The termination board has a robust glass fiber reinforced plastic housing.
 The termination board is mounted in the switch cabinet on a 35 mm DIN mounting rail according to EN 60175.

Application

- Triconex card Tricon CX:
- Termination board 1 and cable 1: channel 1 ... 16
 - Termination board 2 and cable 2: channel 17 ... 32

Connection

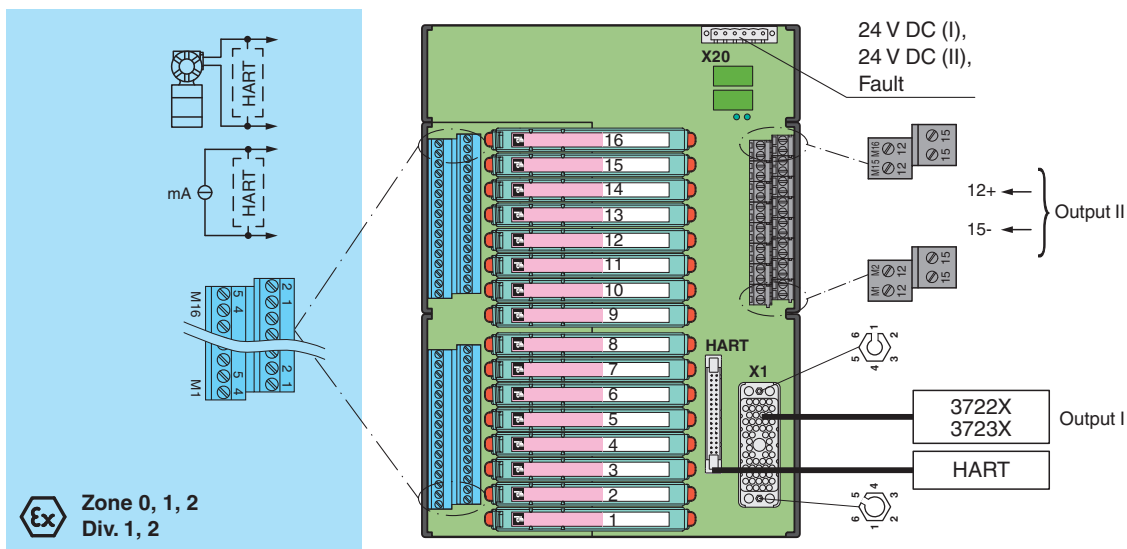

Technical Data

Functional safety related parameters

Safety Integrity Level (SIL)	SIL 3
Systematic capability (SC)	SC 3

Supply

Release date: 2023-10-23 Date of issue: 2023-10-23 Filename: 70159655_eng.pdf

Technical Data

Connection		X20: terminals 3, 5(+); 4, 6(-)
Nominal voltage		24 V DC , in consideration of rated voltage of used isolators
Voltage drop		0.9 V , voltage drop across the series diode on the termination board must be considered
Ripple		≤ 10 %
Fusing		4 A , in each case for 16 modules
Power dissipation		≤ 500 mW , without modules
Reverse polarity protection		yes
Redundancy		
Supply		Redundancy available. The supply for the isolators is decoupled, monitored and fused.
Fault indication output		
Connection		X20: terminals 1(+), 2(-)
Output type		volt-free transistor output , not short-circuit protected , not overload protected
Rated voltage	U_r	30 V DC
Rated current	I_r	100 mA
Signal level		no fault: (external voltage) - 1 V max. for 100 mA ($T_{amb} = 25\text{ °C}$ (77 °F)) power supply fault/module fault: blocked output (off-state current ≤ 10 μA)
Indicators/settings		
Display elements		LED PWR1 (termination board power supply), green LED LED PWR2 (termination board power supply), green LED
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		EN IEC 61326-3-2:2018 , NE 21:2017 For further information see system description.
Degree of protection		IEC 60529:2001
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications		
Degree of protection		IP20
Connection		
Field side		explosion hazardous area: pluggable screw terminals , blue
Control side		non-explosion hazardous area: output I: ELCO socket, 56-pin output II: screw terminals , black
Supply		pluggable screw terminals , black
Fault output		pluggable screw terminals , black
Core cross section		screw terminals 0.25 ... 2.5 mm ² (24 ... 12 AWG)
Material		housing: polycarbonate, 10 % glass fiber reinforced
Mass		approx. 1000 g
Dimensions		266 x 200 x 163 mm (10.5 x 7.9 x 6.42 inch) (W x H x D) , depth including module assembly
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		CESI 06 ATEX 022
Marking		⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1)D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Non-hazardous area		
Maximum safe voltage		250 V (Attention! U_m is no rated voltage.)
Galvanic isolation		
Field circuit/control circuit		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 , EN 60079-11:2012 , EN 50303:2000

Technical Data









International approvals

UL approval	E106378
Control drawing	116-0327
IECEX approval	
IECEX certificate	IECEX CES 06.0003
IECEX marking	[Ex ia Ga] IIC [Ex ia Da] IIC [Ex ia Ma] I

General information


Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .
---------------------------	---

Accessories

	HiATB01-HART-2X16	HART Communication Board
	HiDMux2700	HART Multiplexer Master
	HiACA-UNI-FLK34-FLK34-0M5	HART Connection Cable, length: 0,5 m
	HiACA-UNI-FLK34-FLK34-1M0	HART Connection Cable, length: 1 m
	HiACA-UNI-FLK34-FLK34-2M0	HART Connection Cable, length: 2 m
	HiACA-UNI-FLK34-FLK34-3M0	HART Connection Cable, length: 3 m
	HiACA-UNI-FLK34-FLK34-6M0	HART Connection Cable, length: 6 m
	HiALC-HICTB-SET-108	Label carrier for HiC termination boards

Application

Typical circuit

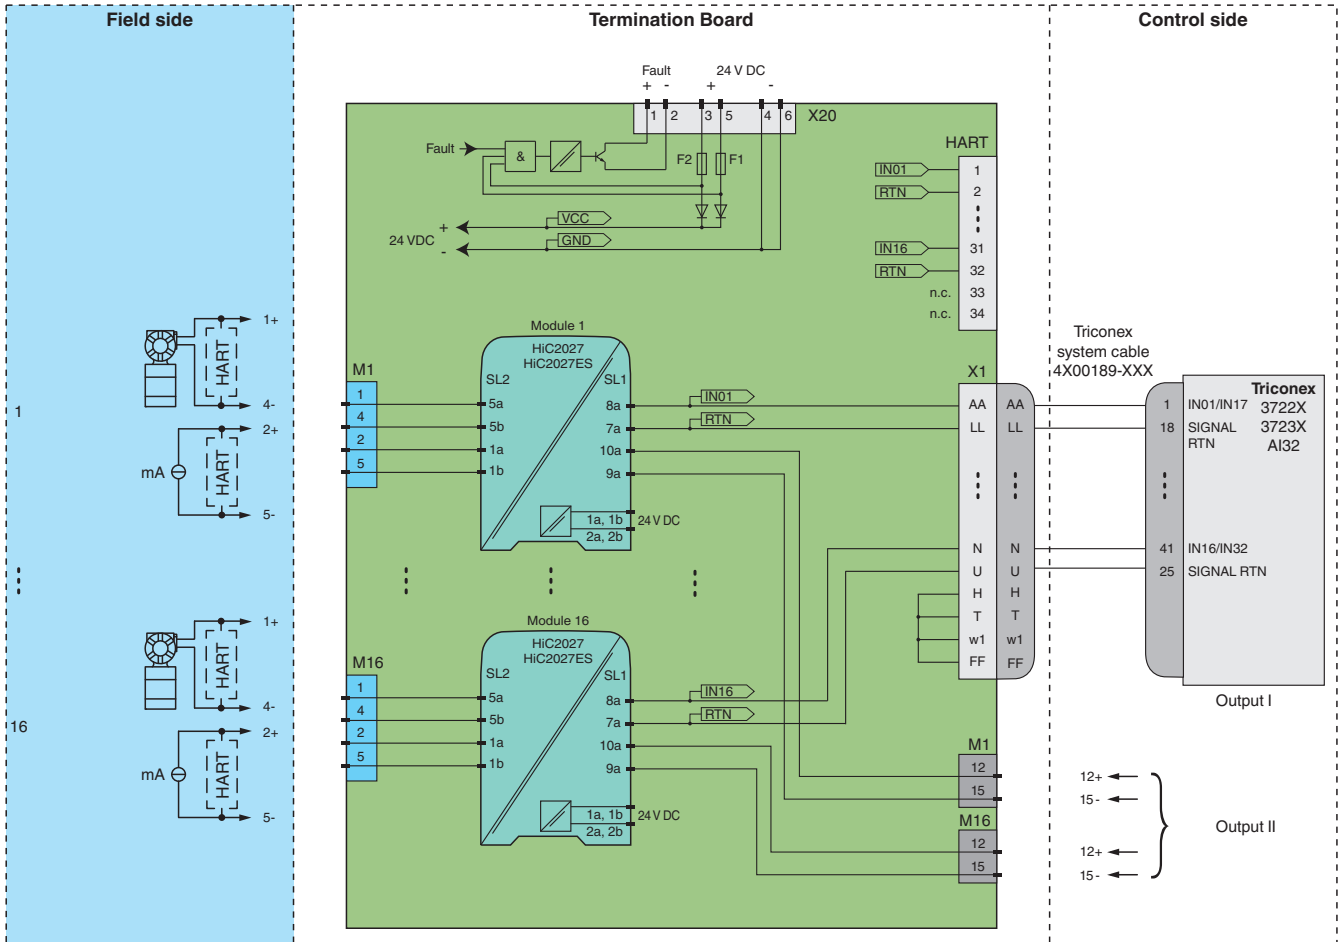

Module switch settings

Type (AI)	DIP switch	Position
HiC2027, HiC2027ES Channel I: voltage output	S1	II
	S2	I
	S3	freely selectable
	S4	freely selectable



Both output loads must be connected to ensure a complete and correct operation within the technical specification.



For exact pin assignment for field side and control side see the documentation of the isolated barrier.



The pin-out configuration has to be observed. For information see corresponding pin-out table on www.pepperl-fuchs.com.

Release date: 2023-10-23 Date of issue: 2023-10-23 Filename: 70159655_eng.pdf