

# Bulk Raw Cable


## CBL-PVC-BU-04x075-100M



Cable, PVC/PVC, 4-core blue



### Dimensions

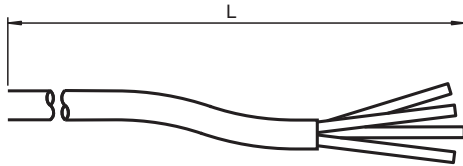

### Technical Data

#### Electrical specifications

Operating voltage  $U_B$  max. 300 V AC/DC

#### Conformity

Flammability IEC 60332-2-1

#### Ambient conditions

Ambient temperature

Cable, fixed installation -15 ... 105 °C (5 ... 221 °F)

Cable, flexing -15 ... 105 °C (5 ... 221 °F)

Pollution degree 3

#### Mechanical specifications

Cable according to IEC/EN 60228 (DIN VDE 0295) class 5

Sheath diameter 6.8 mm  $\pm$  0.2 mm

Bending radius > 6 x cable diameter, movable installation  
&t; 3 x cable diameter, fixed installation

Sheath color blue (similar to RAL 5015)

Number of cores 4

Core cross section 0.75 mm<sup>2</sup>

Cores color Core 1: brown  
Core 2: white  
Core 3: blue  
Core 4: black

Core construction 24 x 0.2 mm  $\varnothing$

Length L 100 m

Cable code Li YY 4 x 0,75

Mass 5070 g

#### Material

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 70178421\_eng.pdf

## Technical Data

Cable	
Sheathing	PVC
Cores	bare copper (Cu)
Core insulation	PVC
Flammability	flame-resistant

## Connection Assignment

_____	.....	_____	BN
_____	.....	_____	WH
_____	.....	_____	BU
_____	.....	_____	BK