

# Photoelectric slot sensor

## GL5-U/43a/155



- Miniature design
- Optimized for the detection of small parts
- High switching frequency
- Simple and fast mounting
- Clearly visible LED functional display


Miniature photoelectric slot sensor for the detection of small parts, U design, fork width 5 mm, infrared light, PNP outputs, flat connector



### Function

The GL5 miniature slot sensor compares a high optical performance in a small housing and is optimized to the requirements in semiconductors industry for small part detection. A wide voltage range of 5 - 24 V DC and the fastest switching frequency of 5 kHz in its class stands for the quality of this sensor. The integrated aperture allows the small part detection with a minimum object size of 0.8 x 1.8 mm. The sensor offers antivalent npn or pnp outputs. Due to a variety of different housings and an optimized housing concept offers the sensor a maximum of freedom in a crowded mounting environment.

### Dimensions

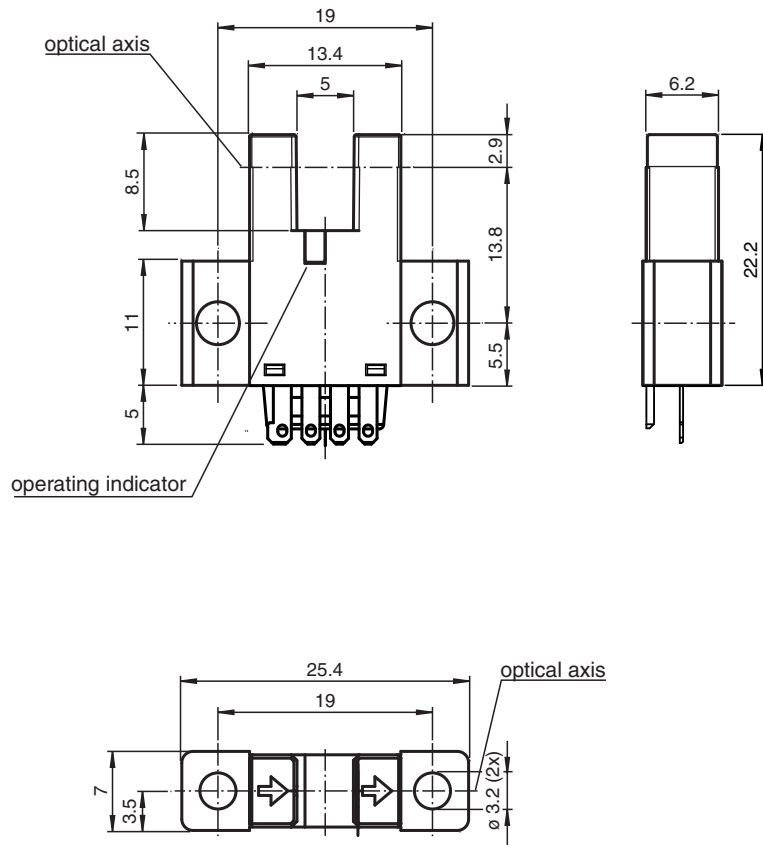


Release date: 2022-08-08 Date of issue: 2022-08-08 Filename: 803115\_eng.pdf

## Technical Data


General specifications			
Light source			IRE D
Light type			Infrared, continuous light , 940 nm
Target size			0.8 x 1.8 mm
Slot width			5 mm
Slot depth			8.5 mm
Ambient light limit			1000 Lux
Functional safety related parameters			
MTTF <sub>d</sub>			3760 a
Mission Time (T <sub>M</sub> )			20 a
Diagnostic Coverage (DC)			0 %
Indicators/operating means			
Function indicator			red LED lights up when receiving the light beam
Electrical specifications			
Operating voltage	U <sub>B</sub>		5 ... 24 V DC , class 2
No-load supply current	I <sub>0</sub>		max. 20 mA
Time delay before availability	t <sub>v</sub>		< 2 ms
Output			
Switching type			light/dark on
Signal output			2 PNP complementary , overvoltage protected
Switching voltage			max. 30 V DC
Switching current			max. 50 mA , resistive load
Voltage drop	U <sub>d</sub>		max. 0.2 V at 10 mA max. 0.6 V at 50 mA
Switching frequency	f		max. 5 kHz
Response time			40 μs Light beam is not interrupted 80 μs Light beam is interrupted
Repeat accuracy	R		0.03 mm
Compliance with standards and directives			
Directive conformity			
EMC Directive 2004/108/EC			EN 60947-5-2:2007+A1:2012
Standard conformity			
Standards			UL 60947-5-2
Approvals and certificates			
EAC conformity			TR CU 020/2011
UL approval			cULus Recognized, Class 2 Power Source
CCC approval			CCC approval / marking not required for products rated ≤36 V
Ambient conditions			
Ambient temperature			-25 ... 55 °C (-13 ... 131 °F)
Storage temperature			-30 ... 80 °C (-22 ... 176 °F)
Pollution degree			2
Mechanical specifications			
Housing width			7 mm
Housing height			25.4 mm
Degree of protection			IP50
Connection			4-pin flat connector
Material			
Housing			PBT
Mass			3 g
Tightening torque, fastening screws			0.6 Nm

## Connection Assignment

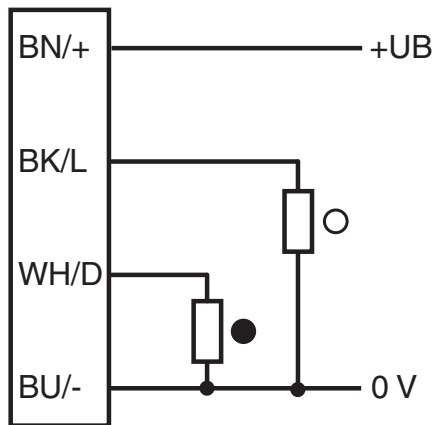


○ = Light on  
● = Dark on

## Accessories

	<b>CBL SET GL5</b>	Connection cable for GL5 series
---	--------------------	---------------------------------

## Response frequency

The response frequency is the value when the disc, given in the figure below, is rotated.

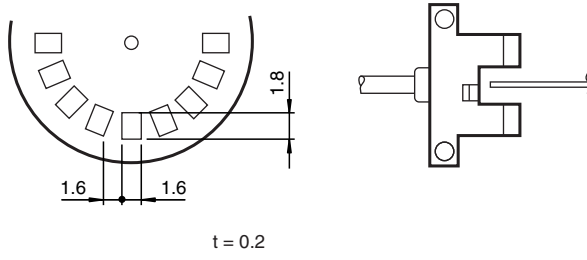

### Applications

The GL5 is suited for applications in the semiconductor and electronic industrial environment.

Typical applications include:

1. Detection of lead frames
2. Detection of cam positions
3. Detection of limit positions of moving objects
4. Position detection of wafer cases