


Inductive sensor

NBB1,5-8GM40-Z3-150MM-V3

- 1.5 mm flush
- 2-wire DC



Dimensions

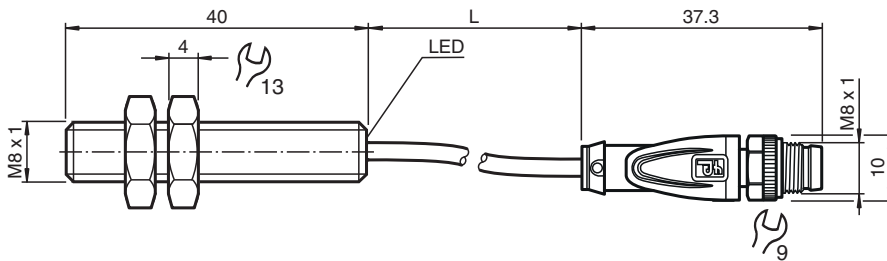

Technical Data

General specifications

Switching function		Normally open (NO)
Output type		Two-wire
Rated operating distance	s_n	1.5 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 1.21 mm
Actual operating distance	s_r	1.35 ... 1.65 mm typ.
Reduction factor r_{AI}		0.22
Reduction factor r_{Cu}		0.16
Reduction factor r_{304}		0.64
Output type		2-wire

Nominal ratings


Operating voltage	U_B	5 ... 60 V
Switching frequency	f	0 ... 1200 Hz
Hysteresis	H	1 ... 10 % typ. 5 %
Reverse polarity protection		reverse polarity tolerant
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 5 V
Operating current	I_L	2 ... 100 mA
Lowest operating current	I_m	2 mA
Off-state current	I_r	0 ... 0.5 mA typ.
Time delay before availability	t_v	\leq

Release date: 2025-06-03 Date of issue: 2025-06-03 Filename: 805389_eng.pdf

Technical Data

Switching state indicator	LED, yellow
Functional safety related parameters	
MTTF _d	1476 a
Mission Time (T _M)	20 a
Diagnostic Coverage (DC)	0 %
Compliance with standards and directives	
Standard conformity	
Standards	EN IEC 60947-5-2
Approvals and certificates	
UL approval	cULus Listed, General Purpose
CCC approval	Certified by China Compulsory Certification (CCC)
Ambient conditions	
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications	
Connection type	fixed cable with plug
Cable gland	
Housing material	Stainless steel 1.4305 / AISI 303
Sensing face	LCP
Degree of protection	IP67
Connector	
Threading	M8 x 1
Tightening torque	0.4 Nm
Number of pins	3
Cable	
Cable diameter	3 mm - 0.2 mm
Bending radius	> 12 x cable diameter
Material	PUR
Color	black
Number of cores	3
Core cross section	0.14 mm ²
Length	L 150 mm
Dimensions	
Length	40 mm
Diameter	8 mm

Connection



Connection Assignment



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)