

Inductive sensor


NMB5-18GM85-US-C-FE-V12



- Stainless steel sensing face
- Sensing range 5 mm
- 2-wire AC/DC
- Weld field immune
- Weld slag resistant coating
- Ferrous targets



Dimensions

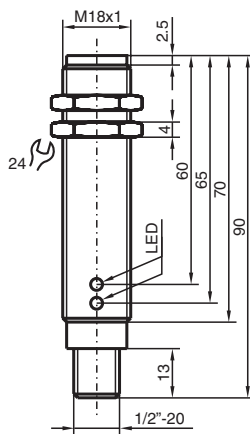

Technical Data


General specifications		
Switching function		Normally open (NO)
Output type		Two-wire
Rated operating distance	s_n	5 mm
Installation		flush
Output polarity		AC/DC
Assured operating distance	s_a	0 ... 4.05 mm
Actuating element		Ferrous targets
Reduction factor r_{Al}		0
Reduction factor r_{Cu}		0
Reduction factor r_{304}		0.4 - 0.7
Reduction factor r_{St37}		1
Reduction factor r_{Brass}		0
Output type		2-wire
Nominal ratings		
Switching frequency	f	0 ... 5 Hz
Hysteresis	H	3 ... 15 typ. 5 %

Release date: 2025-06-05 Date of issue: 2025-06-05 Filename: 905419_eng.pdf


Technical Data

Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 7 V
Rated operating current	I_e	8 ... 200 mA AC/DC
Off-state current	I_r	≤ 1.3 mA
Operating voltage indicator		LED, green
Switching state indicator		LED, yellow
Error indicator		LED, green/yellow (Alternate Flashing) - Short circuit/overload indication
Mag. Field strength, AC fields		250 mT
Mag. Field strength, DC fields		250 mT
Electrical specifications		
Rated operating voltage	U_e	20 ... 250 V AC/DC
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed Enclosure Type Rating: Type 1 Supply/Switching Voltage: 250 V AC/DC Output Switching Current: 200 mA
CCC approval		Certified by China Compulsory Certification (CCC)
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		Connector plug 1/2"-20 UN , 3-pin
Housing material		Xylan coated - Stainless steel 1.4305 / AISI 303
Sensing face		Xylan coated - Stainless steel 1.4305 / AISI 303
Degree of protection		IP67
Dimensions		
Length		90 mm
Diameter		18 mm

Connection



Connection Assignment



Connection Assignment

Wire colors

1		GN	(green)
2		RD/BK	(red/black)
3		RD/WH	(red/white)