


Male receptacle M16-V95-G-S-.15M

- 22 AWG. Wire (.33 mm²)
- Front Mountable
- 7/8" UN2/M16 Threads

Male receptacle, 7/8 inch UN2 /M16, 5-pin



Dimensions

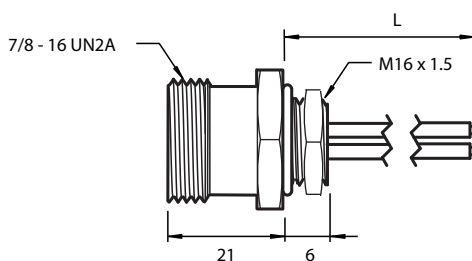

Technical Data

General specifications

Number of pins	5
Construction type	straight
Connection 1	plug
Threading 1	7/8 inch

Electrical specifications

Operating voltage	U_B	max. 300 V
Operating current	I_B	max. 4 A

Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

Ambient conditions

Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------


Mechanical specifications

Degree of protection	IP69
Connection	7/8 inch-16 UN 2 A
Material	clear anodized aluminum
Contacts	copper alloy gold plated

Release date: 2023-08-02 Date of issue: 2023-08-02 Filename: 909308_eng.pdf

Technical Data

Sleeve connector		yellow PVC
Seal		O-ring: BUNA-N
Cable		
Cores		5 x 0.34 mm ² / 22 AWG
Length	L	0.15 m
Note		M16 x 1.5 installation thread

Connection Assignment

1	WH
2	RD
3	GN/YE
4	OR
5	BK