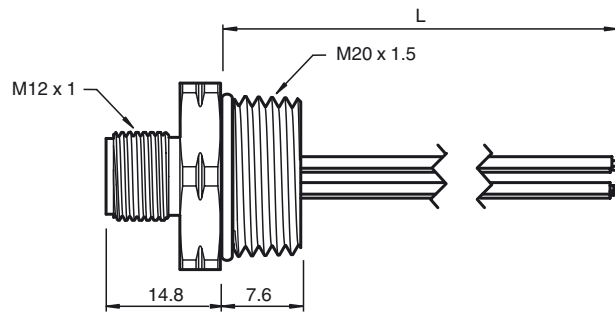


**Model Number****M20-V1-G-S-.3M**

Male receptacle

Dimensions**Technical data****General specifications**

Number of pins	4
Construction type	straight

Electrical specifications

Operating voltage	U_B	max. 300 V AC/DC
Operating current	I_B	max. 4 A

Ambient conditions


Ambient temperature	-40 ... 105 °C (-40 ... 221 °F)
---------------------	---------------------------------

Mechanical specifications

Degree of protection	IP67
Connection	Single strand leads
Material	anodized aluminum
Contacts	Gold plated copper alloy
Sleeve connector	Polyamide (PA)
Seal	NBR
Cable	
Cores	4 x 0.34 mm ² , 22 AWG
Length	L 0.3 m
Note	M20 x 1.5 installation

Approvals and certificates

UL approval	cULus Listed, General Purpose
-------------	-------------------------------

Electrical connection**Electrical connection**

1	BN
2	WH
3	BU
4	BK