

Inductive sensor


NBB7-F104M-A0-200MM-V1



- 7 mm flush
- 4-wire DC
- Metal housing



Dimensions

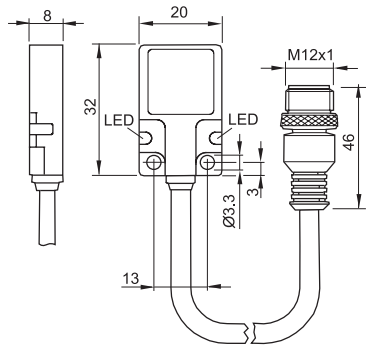

Technical Data

General specifications

Switching function		complementary
Output type		NPN
Rated operating distance	s_n	7 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 5.6 mm
Reduction factor r_{Al}		0.30 - 0.45
Reduction factor r_{Cu}		0.25 - 0.45
Reduction factor r_{304}		0.60 - 1.00
Reduction factor r_{S137}		1
Output type		4-wire

Nominal ratings


Operating voltage	U_B	10 ... 30 V DC
Switching frequency	f	150 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 2.5 V
Operating current	I_L	200 mA
Off-state current	I_r	≤ 80 μ A

Release date: 2025-05-20 Date of issue: 2025-05-20 Filename: 909690_eng.pdf


Technical Data

No-load supply current	I_0	$\leq 15 \text{ mA}$
Switching state indicator		LED
Compliance with standards and directives		
Standard conformity		
Standards		IEC / EN 60947-5-2:2004
Approvals and certificates		
UL approval		cULus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated $\leq 36 \text{ V}$
Ambient conditions		
Ambient temperature		$-25 \dots 70 \text{ }^\circ\text{C}$ ($-13 \dots 158 \text{ }^\circ\text{F}$)
Mechanical specifications		
Connection type		Cable connector M12 x 1 , 4-pin with PUR cable 200 mm
Core cross section		0.14 mm^2
Housing material		GD-Zn
Sensing face		PA 12
Degree of protection		IP67
Dimensions		
Height		8 mm
Width		20 mm
Length		32 mm

Connection



Connection Assignment



Wire colors in accordance with EN 60947-5-2

1	BN	(brown)
2	WH	(white)
3	BU	(blue)
4	BK	(black)