

## Female connector, field-attachable

### V94-G




- Screw terminal connection
- Internal connector thread
- Gold plated contacts

Female connector, 7/8" - 16 UN2B, 4-pin, field attachable



## Dimensions

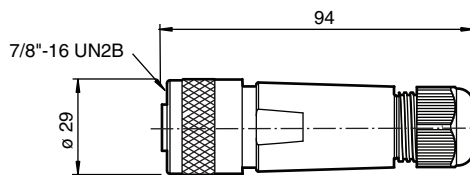

## Technical Data

General specifications		
Number of pins		4
Connection 1		socket
Construction type 1		straight
Threading 1		7/8 inch
Electrical specifications		
Operating voltage	U <sub>B</sub>	max. 600 V
Operating current	I <sub>B</sub>	max. 15 A
Volume resistance		< 5 mΩ
Approvals and certificates		
UL approval		cULus Listed, General Purpose
Ambient conditions		
Ambient temperature		-40 ... 90 °C (-40 ... 194 °F)
Mechanical specifications		
Degree of protection		IP67
Connection		1 x 7/8 inch - 16 UN2B ; Socket, straight , screw terminal for 14 - 22 AWG

Release date: 2023-04-04 Date of issue: 2023-04-04 Filename: 912905\_eng.pdf

## Technical Data

Material	
Contacts	gold plated Cu alloy
Body	Polyamide (PA)
Slotted nut	black anodized aluminum
Sleeve connector	yellow PVC
Cable	
Sheath diameter	5 ... 13 mm

## Connection

