


## Connection cable

V1SD-G-GN2M-TPE-A1S-V45-G

- D coding for Ethernet
- CAT5/CAT5e cable
- Completely silicon free
- Shield attached to coupling nut
- Weld spatter resistant
- Sunlight resistant
- Oil resistant
- Suitable for drag chains
- Highly flexible

Ethernet bus cable, M12 to M12, D-coded, TPE cable 4-pin, CAT5e, shielded

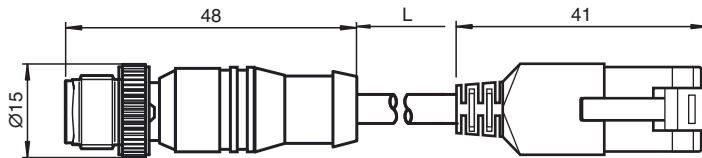

## Technical Data

### General specifications

Number of pins	4
Connection 1	Male connector
Construction type 1	straight
Threading 1	M12
Connection 2	Male connector
Construction type 2	straight
Threading 2	RJ-45

### Electrical specifications

Operating voltage	$U_B$	max. 60 V DC max. 48 V AC
Operating current	$I_B$	max. 4 A
Volume resistance		$\leq 5 \text{ m}\Omega$

### Compliance with standards and directives

Standard conformity	
Standards	CAT5 (IEC 11801:2002) , CAT5e (TIA 568B:2001)

### Ambient conditions

Release date: 2020-06-11 Date of issue: 2020-06-11 Filename: 917136\_eng.pdf

### Technical Data

Ambient temperature		-25 ... 90 °C (-13 ... 194 °F) cable, fixed: -40 ... 70 °C (-40 ... 158 °F) cable, flexing: -10 ... 50 °C (14 ... 122 °F)
Pollution degree		3
<b>Mechanical specifications</b>		
Degree of protection		IP65 / IP67/ IP69K
Connection		M12 x 1 connector , 4-pin , D-coded , RJ-45 , CAT5e
<b>Material</b>		
Contacts		CuSn
Contact surface		Ni/Au
Body		PVC, black
Cable		TPE resistant to welding bead formation
Slotted nut		brass nickel-plated
Core insulation		Polyethylene (PE)
Cable		2 pairs with 2 wires each with 2 fillers for the core
Sheath diameter		6.6 mm
Bending radius		> 34 mm
Color		teal
Number of cores		4
Core cross-section		0.25 mm <sup>2</sup>
Conductor construction		7 x 0.32 mm Ø
Shield		aluminum-lined polyester foil Tinned copper braiding, 75 % coverage
Length	L	2 m
<b>Drag chain suitability</b>		
Drag chain cycles		≥ 1000000 @ 10 x cable OD, minimum radius ≥ 10000000 @ 20 x cable OD, minimum radius

### Connection

