


## panel mount V1D-M16-V1D



- Front/screw mounting
- Suitable for 2-, 3- and 4-wire technology
- Panel Mount; pass through Ethernet connector
- M12 D-coded female to M12 D-coded female

Switch cabinet feedthrough, M12/M12, 4-pin, D-coded

### Dimensions

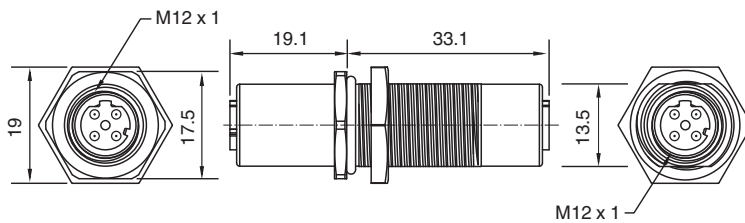

### Technical Data




General specifications			
Number of pins			4
Connection 1			socket
Construction type 1			straight
Threading 1			M12
Connection 2			socket
Construction type 2			straight
Threading 2			M12
Electrical specifications			
Operating voltage	$U_B$	max. ...	60 V DC
Operating current	$I_B$	max.	4 A
Ambient conditions			
Ambient temperature			-40 ... 105 °C (-40 ... 221 °F)
Mechanical specifications			
Degree of protection			IP67
Material			
Contacts			Gold plated copper alloy

Release date: 2025-02-17 Date of issue: 2025-02-17 Filename: 917139\_eng.pdf

## Technical Data

Housing	brass nickel-plated
Slotted nut	brass nickel-plated
Sleeve connector	Polyamide (PA)
Seal	FPM
Mass	41.3 g
<b>General information</b>	
Scope of delivery	locknut not included

## Connection

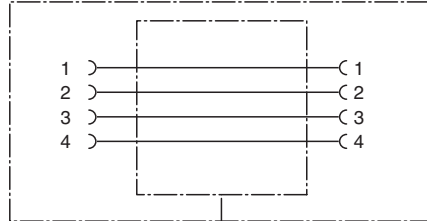

## Mounting

