



Surge Protector

FieldConnex® Fieldbus

SCP-LBF-IA1.36.IE*

- Pluggable, mounts between device coupler and spur cable
- Intrinsically safe (Ex ia), FISCO, Entity, DART Fieldbus, or general-purpose
- Optional diagnostics for wear
- Grounding of shield via gas-discharge tube
- For FOUNDATION Fieldbus H1 and PROFIBUS PA
- Indication via LED and Advanced Diagnostics


Surge protector, pluggable module for spur installation on segment protector



Function

This fieldbus surge protector is in accordance with IEC 61158-2 and mounts on the spur connector of FieldConnex® device couplers, protecting them. It directs power surges to earth via gas discharge tubes. It is certified intrinsically safe for circuits in hazardous areas up to Zone 0/Div. 1 and for DART fieldbus. The surge protector is installed in Zone 1 ... 2 or Div. 1 ... 2. Integrated diagnostics (option) continuously monitor wear caused by surges. The end of the useful life and thus the need for exchange is indicated in two ways: via an LED and in the control room via the FieldConnex® Advanced Diagnostics software. Installation on the spur connector is without additional wiring even as retrofit. A single grounding bar connects surge protectors mounted side by side to a common grounding point.

Connection

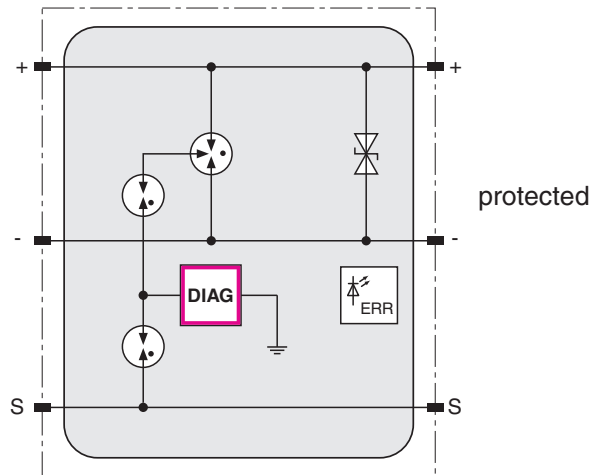

Technical Data

General specifications		
Design / Mounting	Cabinet installation	
Installation in hazardous area	Zone 1 / Div. 1	
Fieldbus connection		
Self current consumption	max. 6 mA (for version SCP-LBF-IA1.36.IE.1) , max. 0 mA (for version SCP-LBF-IA1.36.IE.0)	
Indicators/operating means		
LED ERR	green flashing: status OK , red flashing: maintenance required (for version SCP-LBF-IA1.36.IE.1)	
Electrical specifications		
Rated voltage	U _r	36 V

Release date: 2025-02-07 Date of issue: 2025-02-07 Filename: t157352_eng.pdf


Technical Data

Rated current	I_r	250 mA
Voltage protection level	U_p	
Line/Line		max. 50 V category B2 10/700 μ sec , 25 A max. 53 V category C1 8/20 μ sec , 150 A max. 55 V category C2 8/20 μ sec , 150 A max. 46 V category C3 1 kV/ μ sec , 10 A
Line/Earth		max. 980 V category B2 10/700 μ sec , 50 A per line max. 800 V category C1 8/20 μ sec , 50 A per line max. 1450 V category C2 8/20 μ sec , 5 kA per line max. 1200 V category C3 1 kV/ μ sec , 50 A per line max. 980 V category D1 10/350 μ sec , 500 A per line
Screen/Shield indirectly grounded (via GDT)		max. 500 V category B2 10/700 μ sec , 100 A max. 600 V category C1 8/20 μ sec , 500 A max. 700 V category C2 8/20 μ sec , 10 kA max. 550 V category C3 1 kV/ μ sec , 100 A max. 570 V category D1 10/350 μ sec , 1 kA
Reaction time	t_A	
Line/Line		max. 1 ns
Line/Earth		max. 100 ns
Screen/Shield-Earth		max. 100 ns
Overstressed fault mode		according IEC 61643-21 line inoperable mode 2
Impulse durability		
Per line		5 kA category C2 8/20 μ sec
Screen/Shield indirectly grounded (via GDT)		1 kA category D1 10/350 μ sec 10 kA category C2 8/20 μ sec
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013
Standard conformity		
Electromagnetic compatibility		
Degree of protection		NAMUR NE 21
Fieldbus standard		IEC 60529
Climatic conditions		IEC 61158-2
Shock resistance		IEC 60721
Vibration resistance		EN 60068-2-27
Surge protection		EN 60068-2-6
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		≤ 95 % non-condensing
Shock resistance		15 g 11 ms
Vibration resistance		1 g , 10 ... 150 Hz
Corrosion resistance		acc. to ISA-S71.04-1985, severity level G3
Mechanical specifications		
Connection type		screw terminals
Core cross section		flexible wire 2.5 mm ² solid wire max. 4 mm ²
Housing material		Polyamide PA 6.6
Degree of protection		IP20
Mass		45 g
Grounding		M4 screw and external grounding rail
Data for application in connection with hazardous areas		
EU-type examination certificate		SIRA 12 ATEX 2128X
Marking		Ⓔ II 1G Ex ia IIC T4
Voltage	U_i	24 V
Current	I_i	500 mA
Internal capacitance	C_i	2 nF

Technical Data

Internal inductance	L_i	0.1 μ H
Certificate		SIRA 12 ATEX 4176X
Marking		Ⓜ II 3G Ex nAc IIC T4 , Ⓜ II 3G Ex ic IIC T4
Voltage	U_i	33 V
Current	I_i	600 mA
Internal capacitance	C_i	2 nF
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 , EN 60079-11:2012 , EN 60079-15:2010
Supplementary information		FISCO field device
International approvals		
CSA approval		CoC 2595441
Control drawing		116-0365
Approved for		Class I, Division 1, Groups A, B, C, D T4 Class I, Zone 0, Ex ia IIC T4 Class I, Zone 2, Ex ic IIC T4 Class I, Zone 0, AEx ia IIC T4 Class I, Zone 2, AEx ic IIC T4 Class I, Division 2, Groups A, B, C, D T4 Class I, Zone 2, Ex nL IIC T4 Class I, Zone 2, Ex na IIC T4 Class I, Zone 2, AEx nAc IIC T4
IECEX approval		
IECEX certificate		IECEX SIR 12.0051X
IECEX marking		Ex ia IIC T4
General information		
Supplementary information		Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .

Assembly

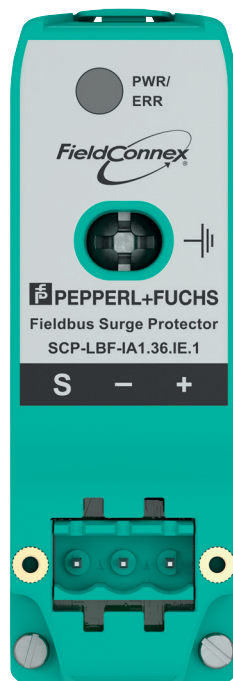


Additional Information

Product Versions

Type	Description
SCP-LBF-IA1.36.IE.0	Fieldbus Surge Protector without diagnosis
SCP-LBF-IA1.36.IE.1	Fieldbus Surge Protector with diagnosis

Dimensions

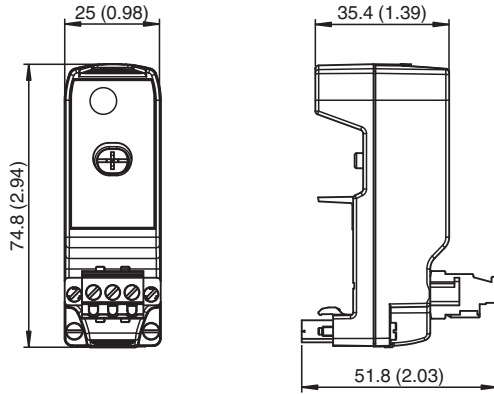

Dimensions in mm (in)