

Singleturn absolute encoder

EVS58-PZ



- Industrial standard housing $\varnothing 58$ mm
- Ethernet interface with Powerlink
- 16 Bit singleturn
- Two Ethernet connectors with built in hub
- Servo or clamping flange



Function

Absolute rotary encoders deliver an absolute step value for each angle setting. On account of the high number of measuring steps, this type of absolute rotary encoder can be used to divide very long linear distances into small measuring steps.


The Ethernet interface of this absolute encoder supports the Powerlink V2 protocol. An integrated hub allows wiring in a line structure (daisy chain).

In addition to various functions like resolution adjustment, rotation direction, node number setting or limit switch adjustment, the following operation modes can be selected:


- Polled mode
- Multiplexed mode
- Poll Response chaining

The device is designed for shaft assembly and is available in servo flange or clamping flange design.

Dimensions

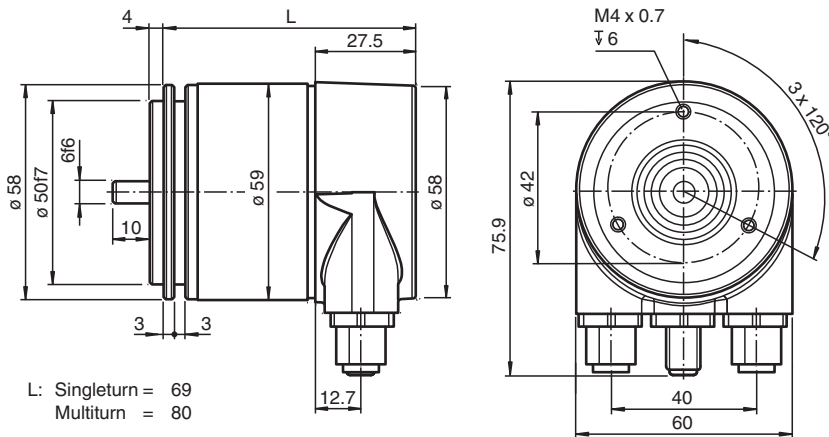

Dimensions

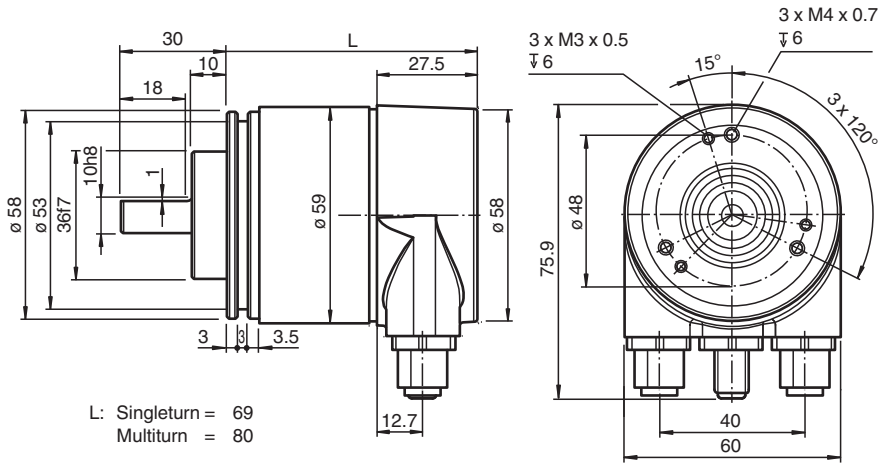

Technical Data

General specifications	
Detection type	photoelectric sampling
Device type	Singleturn absolute encoder
Functional safety related parameters	
MTTF _d	130 a
Mission Time (T _M)	20 a
L _{10h}	1.9 E+11 at 6000 rpm and 20/40 N axial/radial shaft load
Diagnostic Coverage (DC)	0 %
Electrical specifications	
Operating voltage	U _B 10 ... 30 V DC , safe galvanic isolation per EN 50178
Power consumption	P ₀ max. 3 W
Linearity	± 0.5 LSB (12 Bit) , ± 2 LSB (16 Bit)
Output code	binary code
Code course (counting direction)	programmable, cw ascending (clockwise rotation, code course ascending) cw descending (clockwise rotation, code course descending)
Interface	
Interface type	Ethernet Powerlink
Resolution	
Single turn	up to 16 Bit
Overall resolution	up to 16 Bit
Physical	Ethernet
Transfer rate	100 MBit/s
Connection	
Connector	Ethernet: 2 sockets M12 x 1, 4-pin, D-coded Supply: 1 plug M12 x 1, 5-pin, A-coded
Standard conformity	
Degree of protection	DIN EN 60529, shaft side: IP64 (without shaft seal)/IP66 (with shaft seal) housing side: IP65
Climatic testing	DIN EN 60068-2-3, no moisture condensation
Emitted interference	EN 61000-6-4:2007
Noise immunity	EN 61000-6-2:2005
Shock resistance	DIN EN 60068-2-27, 100 g, 6 ms
Vibration resistance	DIN EN 60068-2-6, 10 g, 10 ... 2000 Hz
Approvals and certificates	
UL approval	cULus Listed, General Purpose, Class 2 Power Source
CCC approval	CCC approval / marking not required for products rated ≤36 V

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t163530_eng.pdf

Technical Data









Ambient conditions

Operating temperature	-40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	98 % , no moisture condensation

Mechanical specifications

Material	housing: powder coated aluminum flange: aluminum shaft: stainless steel
Mass	approx. 550 g
Rotational speed	max. 12000 min ⁻¹
Moment of inertia	30 gcm ²
Starting torque	≤ 3 Ncm (version without shaft seal)
Shaft load	
Axial	40 N
Radial	80 N

Accessories

	9203	Angled flange
	V1SD-G-ABG-PG9	Male connector M12 straight D-coded 4-pin, for cable diameter 5 - 8 mm, shielded, field-attachable
	V1SD-G-2M-PUR-ABG-V45-G	Connection cable, M12 to RJ-45, PUR cable 4-pin, CAT5e
	V15-G-YE2M-PVC	Female cordset, M12, 5-pin, PVC cable
	9300	Mounting bracket for servo flange
	V15-G-YE5M-PVC	Female cordset, M12, 5-pin, PVC cable
	V15-G-PG9	Female connector M12 straight A-coded 5-pin, for cable diameter 6 - 8 mm, field-attachable
	MBT-36ALS	Spring-loaded mounting bracket with a diameter of 36 mm

Connection

Pin	Male connector M12 x 1, 4-pin, A-coded	Female connector M12 x 1, 4-pin, D-coded
1	Supply voltage +U _B	Tx +
2	-	Rx +
3	0 V	Tx -
4	-	Rx -

--	--


Indication

LEDs for HUB Port

LED	Color	Status	Meaning
LS/DA 1	green	on	LINK active for HUB Port 1
		blinking	Activity on HUB Port 1
LS/DA 2	green	on	LINK active for HUB Port 2
		blinking	Activity on HUB Port 2

LEDs for Powerlink

LED	Color	Status	Meaning
Error	red	on	- not allowed node number - internal communication error - buffer underrun/overflow - collision - CRC error - loss of SoC
		off	no error
Status	green	off	not active
		flickering	Basic Ethernet mode
		flashes 1x	Pre-Operational 1
		flashes 2x	Pre-Operational 2
		flashes 3x	ready to operate
		on	Operational
		blinking	Stopped

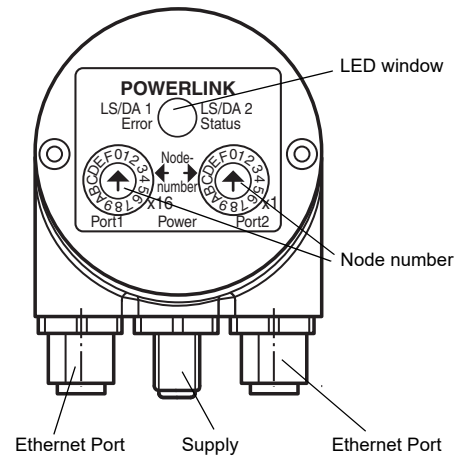

Node number adjustment

The setting of the controlled node number is achieved by 2 hexadecimal switches x16 and x1. Allowed node numbers range is 1 ... 239. The adjusted node number is calculated as follows:

$$\text{Node number} = \text{Decimal value}_{[\text{switch } x16]} \times 16 + \text{Decimal value}_{[\text{switch } x1]} \times 1$$

Example:


[switch x16] = A, [switch x1] = 5
 $A_{\text{hex}} = 10_{\text{dec}} \times 16 = 160 + 5 = 165$

Type Code

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t163530_eng.pdf

Order code

E V S 5 8 N - P Z R 0 B N - 0 0

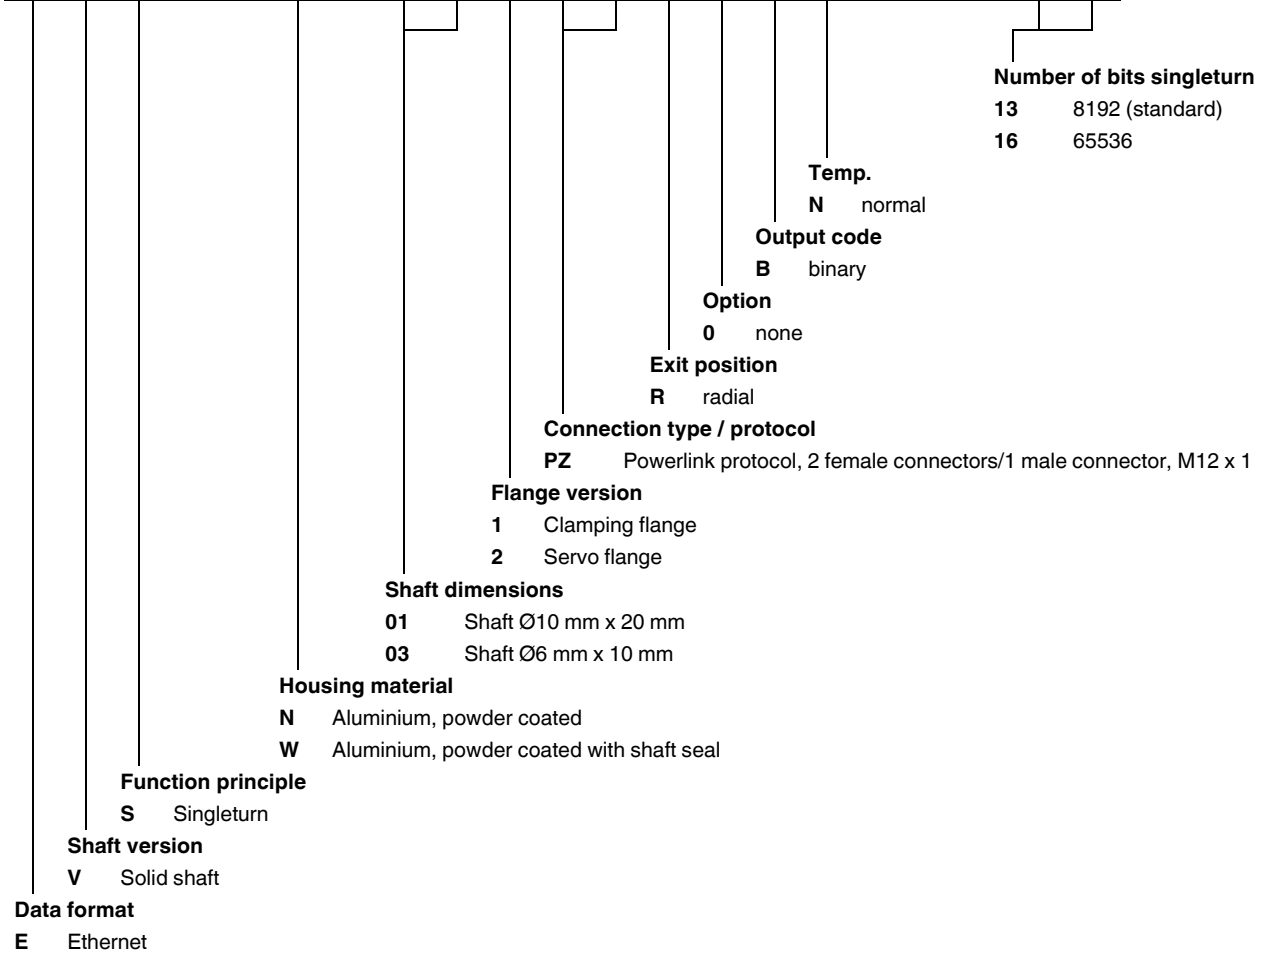

Release date: 2022-12-12 Date of issue: 2022-12-12 Filename: t163530_eng.pdf