



Personal Computer Unit (PCU)

Generation 2024

PCU1100-* (Intel® Atom Elkhart Lake Processor)

- Modular, lightweight design
- Low-power design with minimal heat dissipation
- High connectivity flexibility due to multiple interface options
- Powerful Intel® Atom Elkhart Lake processor
- Certified for ATEX and IECEx Zone 1/21
- IP66



Personal Computer Unit (PCU)



Function

The PCU1100-* Personal Computer Unit is an ATEX/IECEx certified device intended for use in hazardous areas (Zones 1/21). Connected to a Pepperl+Fuchs display unit device, it serves as a PC-based computing unit and runs a pre-installed Microsoft® Windows™ operating system. The PCU1100-* allows users to install individual software packages such as SCADA applications to visualize and control their automation application. Multiple Ex i interfaces support the connection of intrinsically safe accessories that match with the provided entity parameters like Pepperl+Fuchs' EXTA2 keyboard and mouse system or IDM barcode readers. The USB Ex e interface can be used to connect other third-party devices that comply with the installation requirements. For extended distances, the PCU1100-* is available with an optional multi-mode or single-mode fiber optic interface. The PCU1100-* Personal Computer unit is used in combination with the modular Pepperl+Fuchs HMI components display unit (DPU1100-*) and Power Supply unit (PSU1100-*) of the VisuNet GXP product line.

Dimensions

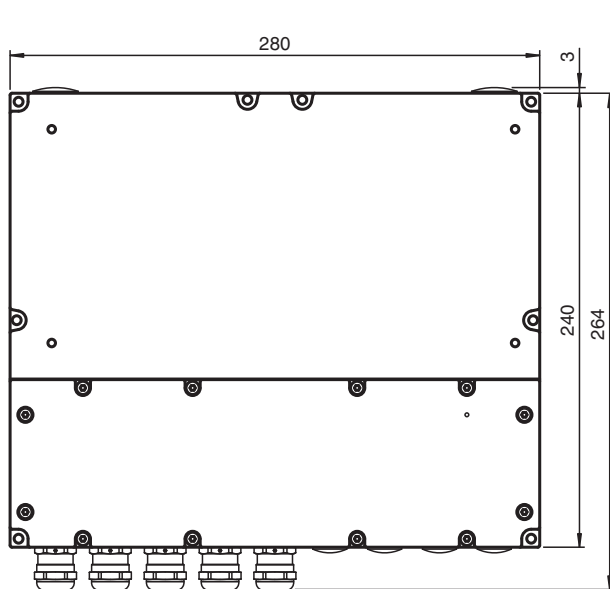

Technical Data

Hardware

Release date: 2025-02-17 Date of issue: 2025-02-17 Filename: t215611_eng.pdf

Personal Computer Unit (PCU)

Technical Data

Processor	Intel® Atom Elkhart Lake x6425RE
RAM	8 GB
Mass storage	240 GByte industrial grade SSD optional: 480 GByte SSD
Supply	
Input voltage	24 V DC , 2 A SELV/PELV
Power consumption	max. 48 W
Interface	
Interface type	Standard: Pepperl+Fuchs interface v1.0 for display units 1 x Ethernet 100/1000BASE-TX (Ex e) or 1 x fiber optic 1000BASE-SX (Multimode) or 1 x fiber optic 1000BASE-LX (Singlemode), 1 x USB 2.0 (Ex e; service port), 2 x USB 1.1 (Ex i; intended for Pepperl+Fuchs keyboard and mouse) Optional: 1 x barcode reader interface Pepperl+Fuchs Pscan-D/B (Ex i) "S3": 1 x barcode reader interface for wired 1-D scanners IDM-160-D*, IDM-Z1-160-D- * and base station IDMx61-B-* and IDM-Z1-x61-B-* (Ex i) "S4": 1 x barcode reader interface for wired 2-D Scanner IDM-Z1-260-D-* (Ex i) "S5": 1 x RS-232 interface with Power Supply for miscellaneous devices and peripherals (Ex i) 1 x RS-232 (Ex e) 1 x RS-485 (Ex e) 1 x Ethernet 100/1000Base-TX (Ex e) Bluetooth v4.0, communication distance up to 30 m in open terrain, transmission power +8 dBm, transmission frequency 2.402 ... 2.48 GHz
Directive conformity	
Electromagnetic compatibility	
Directive 2014/30/EU	EN 61326-1:2013 (industrial locations) ; EN 61000-6-4:2007+A1:2011
RoHS	
Directive 2011/65/EU (RoHS)	EN 50581:2012-09
Software	
Operating system	Windows® 10 IoT Enterprise LTSC 2021 x64
Ambient conditions	
Operating temperature	-20 ... 65 °C (-4 ... 149 °F)
Storage temperature	-20 ... 65 °C (-4 ... 149 °F)
Relative humidity	93% at 40°C, non-condensating, according to EN 60068-2-78
Shock resistance	30 g , 11 ms all axis, IEC 60068-2-27
Vibration resistance	5 ... 100 Hz 1 G, 12 m/s ²
Mechanical specifications	
Degree of protection	IP66 (when mounted on the display unit from Pepperl+Fuchs)
Material	
Housing	anodized aluminum
Mass	approx. 5 kg
Dimensions	280 mm x 240 mm x 43 mm
Data for application in connection with hazardous areas	
EU-type examination certificate	BVS 16 ATEX E 083 X
Marking	Ⓜ II 2G Ex eb q [ib] IIC T4 IP66 Gb Ⓜ II 2D Ex tb [ib] IIIC T85°C IP66 Db
Directive conformity	
Directive 2014/34/EU	EN 60079-0:2012+A11:2013, EN 60079-5:2015, EN 60079-7:2015, EN 60079-11:2012, EN 60079-31:2014
International approvals	
IECEx approval	IECEx BVS 16.0060X
Approved for	Ex eb q [ib] IIC T4 IP66 Gb Ex tb [ib] IIIC T85°C IP66 Db
Standards	IEC 60079-0:2011, IEC 60079-5:2015, IEC 60079-7:2015, IEC 60079-11:2011, IEC 60079-31:2013

Release date: 2025-02-17 Date of issue: 2025-02-17 Filename: t215611_eng.pdf

Type Code

PCU1100-* Personal Computer Unit

CPU Unit	Explosion protection	Interfaces	Module A	Module B	Computing Platform	Options & Customization
CPU Unit						
PCU1100-	Personal Computer Unit (Platform: Zone 1/21; GXP Product Group, Version 0)					
Explosion protection						
J1-	IECEX & ATEX II 2 GD; Zone 1/21					
Interfaces						
ET-	1 x 1000BASE-T LAN Ex e, 1 x USB Ex e, 2 x USB Ex i					
SX-	1 x 1000BASE-SX fiber optic (Multimode), 1 x USB Ex e, 2 x USB Ex i					
LX-	1 x 1000BASE-LX fiber optic (Single mode), 1 x USB Ex e, 2 x USB Ex i					
Module A						
NN-	No additional interface module					
BR-	1 x TTY Ex i for barcode reader (PSCAN-D / EX Dragon) and base station (PSCAN-B)					
S1-	1 x RS-232 Ex e					
S2-	1 x RS-485 Ex e					
S3-	1 x Ex i interface for wired 1-D barcode readers IDM-160-D*, IDM-Z1-160-D* and base station IDMx61-B* and IDM-Z1-x61-B*					
S4-	1 x Ex i interface for 2-D barcode readers IDM-Z1-260-D*					
S5-	1 x RS-232 Ex i interface for miscellaneous devices and peripherals					
ET-	1 x 1000BASE-T LAN Ex e					
Module B						
NN-	No additional interface module					
BR-	1 x TTY Ex i for barcode reader (PSCAN-D / EX Dragon) and base station (PSCAN-B)					
S1-	1 x RS-232 Ex e					
S2-	1 x RS-485 Ex e					
S3-	1 x Ex i interface for wired 1-D barcode readers IDM-160-D*, IDM-Z1-160-D* and base station IDMx61-B* and IDM-Z1-x61-B*					
S4-	1 x Ex i interface for 2-D barcode readers IDM-Z1-260-D*					
S5-	1 x RS-232 Ex i interface for miscellaneous devices and peripherals					
ET-	1 x 1000BASE-T LAN Ex e					
Computing Platform						
PC5-	Intel® Elkhart Lake x6425RE, 8-GB RAM, 240-GB SSD, Windows® IoT Enterprise LTSC 2021					
PC6-	Intel® Elkhart Lake x6425RE, 8-GB RAM, 480-GB SSD, Windows® IoT Enterprise LTSC 2021					
Options & Customization						
NO	Standard (No customization)					

Example: PCU1100-J1-ET-NN-NN-PC5-N0

Release date: 2025-02-17 Date of issue: 2025-02-17 Filename: t215611_eng.pdf