



# Segment Protector Junction Box, Carbon Steel

SPJB-\*\*-CS\*.\*\*\*




- Intrinsically safe (Ex ic)/non-incendive outputs
- Carbon steel, NEMA 4
- Configurable cable entries for trunk and spurs
- Packaged solution
- For FOUNDATION Fieldbus H1 and PROFIBUS PA
- Installation in Class I, Division 2



## Function

This Segment Protector Junction Box is a device coupler with FieldConnex® Segment Protectors for Zone 2/Div 2. Devices can be located in Zone 2/Div 2. The number of outputs and size can be selected. Painted carbon steel provides good corrosion resistance. The optional window makes it easy to see the coupler's LEDs. Trunk and spur entries can be selected individually from a range of cable glands and quick disconnects. This junction box is available pre-wired, with all accessories, for fast ordering, delivery, site installation, and commissioning.

## Connection

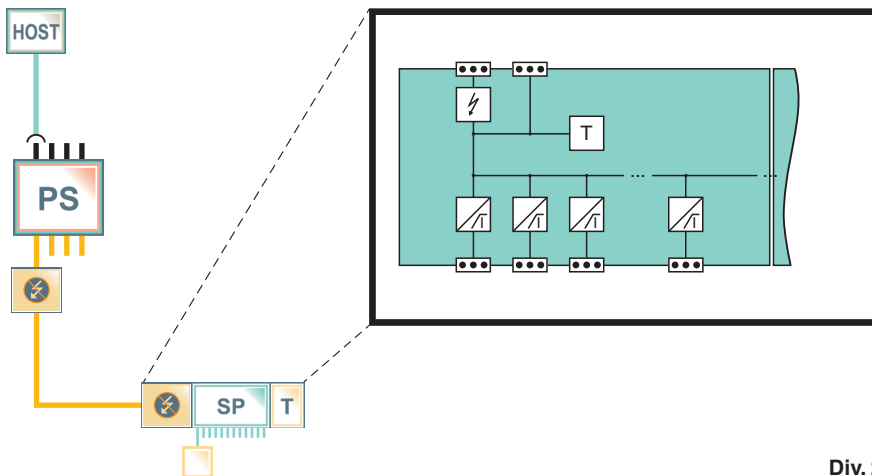

Div. 2

## Technical Data

### General specifications

Design / Mounting	Outside installation
Installed components	Segment Protector R2-SP-IC* For technical data on installed electronic component see data sheet.

### Conformity

Degree of protection	EN 60529
----------------------	----------

### Ambient conditions

Ambient temperature	-40 ... 70 °C (-40 ... 158 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	95 % , no moisture condensation

### Mechanical specifications


Enclosure cover	hinged door with cam lock
-----------------	---------------------------

Release date: 2022-07-04 Date of issue: 2022-07-04 Filename: t48142\_eng.pdf

## Technical Data

Degree of protection	IP66, NEMA 4, NEMA 4X, NEMA 12
Cable entry	cable gland and stopping plug options see separate table
Material	
Housing	Steel
Surface	gray paint
Seal	oil-resistant, one piece
Material thickness	enclosure body, enclosure cover: 1.6 mm window: 6 mm
Dimensions	(W x H x D) 203 x 254 x 102 mm window size: 197 x 95 mm
Mounting	thru-holes Ø6.4 mm
Grounding	grounding bolt on enclosure body and enclosure cover

## Assembly

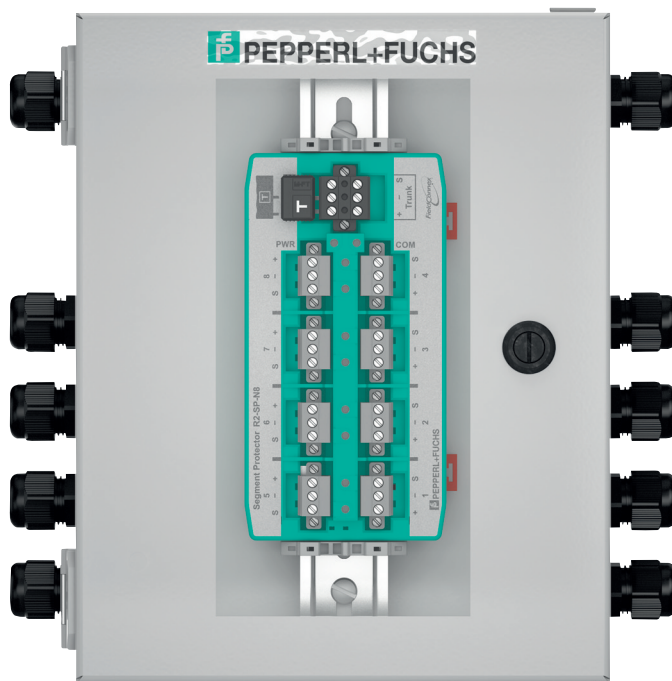


## Product Versions

### Connection type

Type	Cable gland			Plug connection		Conduit connection
	CGP	CGB	CGS	7/8S	M12S	1/2CB
<b>Mechanical specifications</b>						
Protection degree	IP67	IP67	IP67	IP67	IP67	IP67
Material	polyamide	nickel-plated brass	stainless steel	stainless steel	stainless steel	nickel-plated brass
Thread	M16	M16	M16	M16	M16	M16
Outer sheath (mm)	5 ... 10	5 ... 10	5 ... 10	7/8" thread	M12	½" NPT conduit
<b>Cable</b>						
Suitable for armored cable	no	no	no	no	no	no

### Type Code

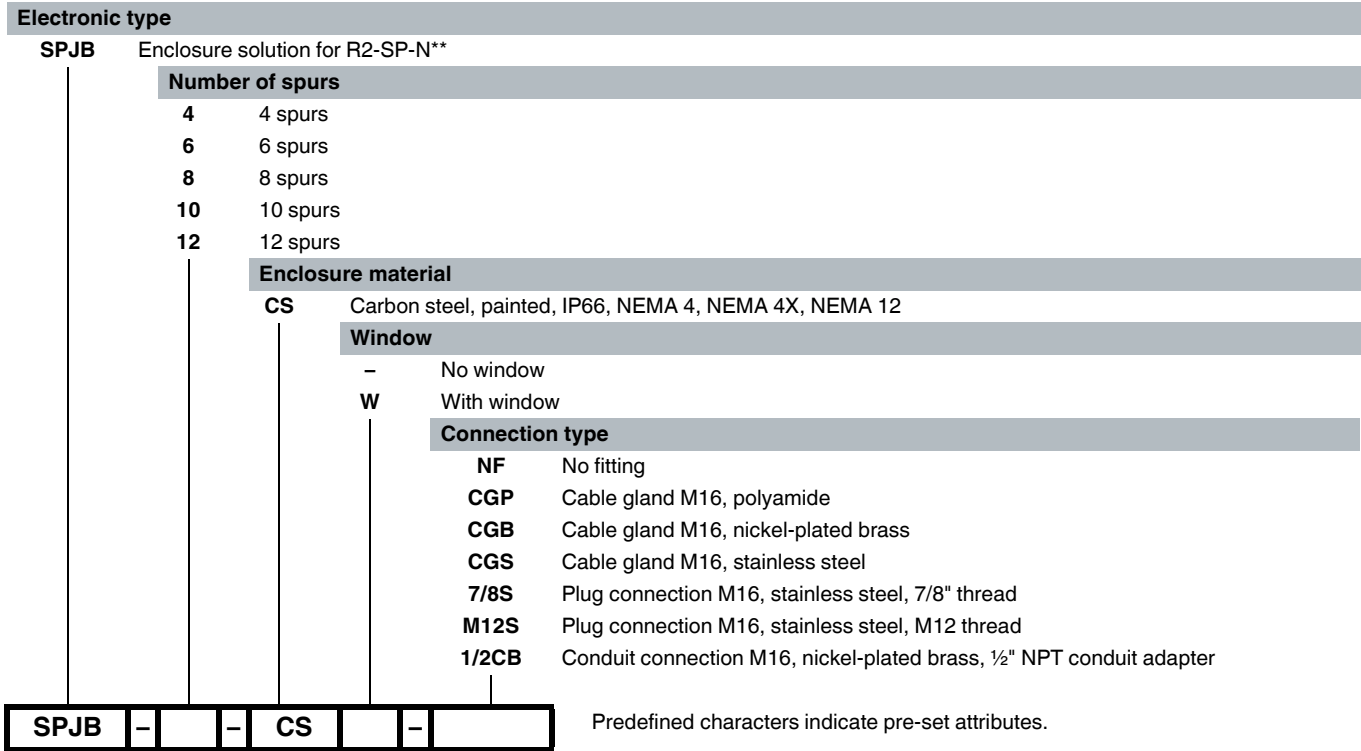

Release date: 2022-07-04 Date of issue: 2022-07-04 Filename: t48142\_eng.pdf