



Solenoid Driver

KFD0-SD2-Ex1.10100



- 1-channel isolated barrier
- 24 V DC supply (loop powered)
- Current limit 100 mA at 10 V DC
- Up to SIL 3 acc. to IEC/EN 61508



Function

This isolated barrier is used for intrinsic safety applications. It supplies power to solenoids, LEDs, and audible alarms located in a hazardous area. It is loop powered, so the available energy at the output is received from the input signal. The output signal has a resistive characteristic. As a result the output voltage and current are dependent on the load and the input voltage. At full load, 10 V at 100 mA is available for the hazardous area application.

Connection

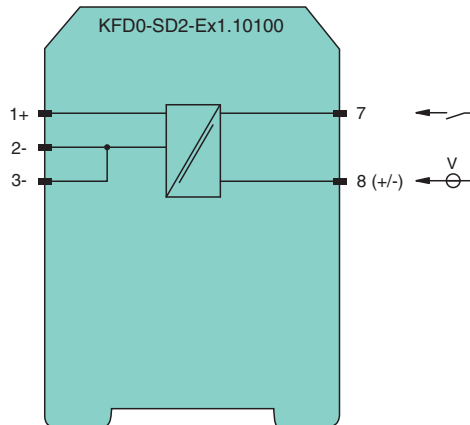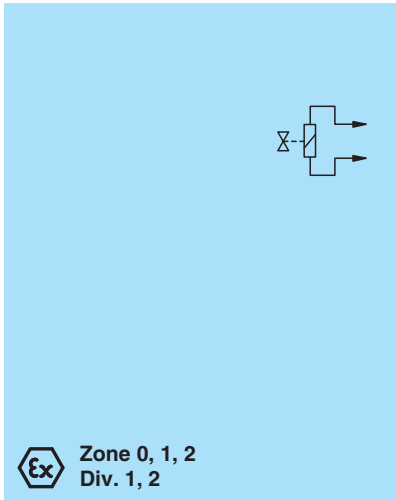

Ex Zone 0, 1, 2
Div. 1, 2

Technical Data

General specifications			
Signal type	Digital Output		
Functional safety related parameters			
Safety Integrity Level (SIL)	SIL 3		
Supply			
Rated voltage	U_r	20 ... 35 V DC , loop powered	
Power dissipation		< 1.2 W ($U_i \leq 30$ V)	
Input			
Connection side		control side	
Connection		terminals 7, 8	
Rated voltage	U_r	20 ... 35 V DC	

Release date: 2024-01-17 Date of issue: 2024-01-17 Filename: 133237_eng.pdf

Technical Data


Current		150 mA at 20 V input voltage, load = 100 Ω 100 mA at 35 V input voltage, load = 100 Ω
Output		
Connection side		field side
Connection		terminals 1+, 2-
Internal resistor	R_i	$\leq 68 \Omega$
Current	I_e	≥ 100 mA
Voltage	U_e	≥ 9.5 V
Open loop voltage	U_s	min. 16.2 V
Output current		100 mA
Output signal		These values are valid for the rated operating voltage 20 ... 35 V DC.
Energized/De-energized delay		single operation: typ. 1.7 ms/50 μ s; periodical: typ. 5 μ s/50 μ s
Indicators/settings		
Display elements		LED
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2006
Degree of protection		IEC 60529:2001
Protection against electrical shock		UL 61010-1:2004
Ambient conditions		
Ambient temperature		-20 ... 60 $^{\circ}$ C (-4 ... 140 $^{\circ}$ F)
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 100 g
Dimensions		20 x 107 x 115 mm (0.8 x 4.2 x 4.5 inch) (W x H x D) , housing type B1
Height		107 mm
Width		20 mm
Depth		115 mm
Mounting		on 35 mm DIN mounting rail acc. to EN 60715:2001
Data for application in connection with hazardous areas		
EU-type examination certificate		BASEEFA 06 ATEX 0252
Marking		⊕ II (1)G [Ex ia Ga] IIC ⊕ II (1)D [Ex ia Da] IIIC ⊕ I (M1) [Ex ia Ma] I
Voltage	U_o	17 V
Current	I_o	271 mA
Power	P_o	1152 mW
Input		
Maximum safe voltage	U_m	250 V (Attention! The rated voltage can be lower.)
Certificate		TÜV 99 ATEX 1499 X
Marking		⊕ II 3G Ex nA II T4
Galvanic isolation		
Input/Output		safe electrical isolation acc. to IEC/EN 60079-11, voltage peak value 375 V
Directive conformity		
Directive 2014/34/EU		EN IEC 60079-0:2018+AC:2020 , EN 60079-11:2012 , EN 60079-15:2010
International approvals		
FM approval		
Control drawing		116-0309
UL approval		E106378
Control drawing		116-0316 (cULus)

Technical Data

IECEX approval		
IECEX certificate		IECEX BAS 06.0058 IECEX CML 19.0093X
IECEX marking		[Ex ia Ga] IIC , [Ex ia Da] IIIC , [Ex ia Ma] I Ex ec IIC T4 Gc
General information		
Supplementary information		Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

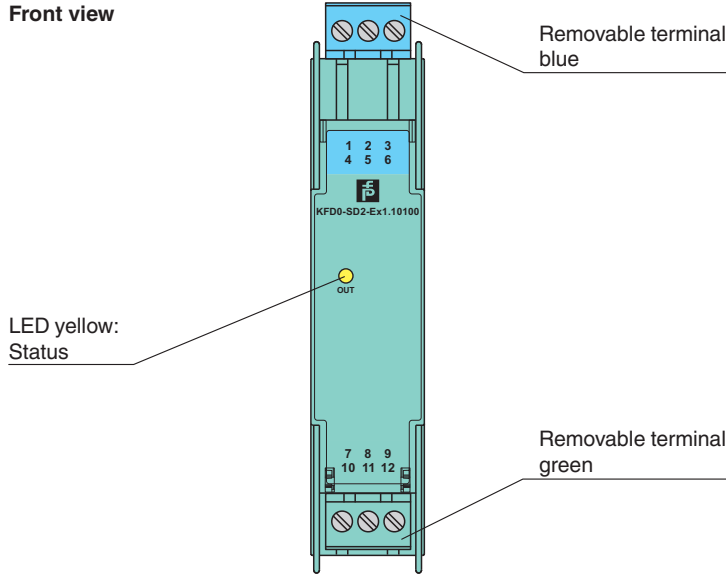


Release date: 2024-01-17 Date of issue: 2024-01-17 Filename: 133237_eng.pdf


Characteristic Curve

Output characteristics

Output circuit diagram



Output characteristic

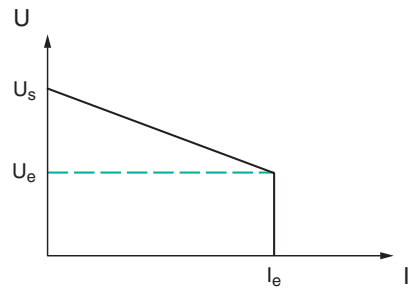

Release date: 2024-01-17 Date of issue: 2024-01-17 Filename: 133237_eng.pdf