

Capacitive sensor


CBB4-12GH70-E0



- 4 mm flush
- Operating distance adjustable via potentiometer
- Suitable for foodstuff conditions
- Resistant against aggressive media



Dimensions

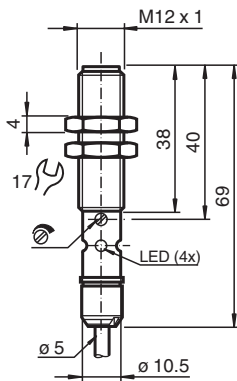

Technical Data

General specifications

Switching function		Normally open (NO)
Output type		NPN
Rated operating distance	s_n	4 mm
Installation		flush
Output polarity		DC
Assured operating distance	s_a	0 ... 2.88 mm
Output type		3-wire

Nominal ratings


Installation conditions		
A		0 mm
B		0 mm
C		15 mm
F		15 mm
Operating voltage	U_B	10 ... 36 V DC
Switching frequency	f	0 ... 50 Hz
Reverse polarity protection		reverse polarity protected
Short-circuit protection		pulsing
Voltage drop	U_d	≤ 2.5 V
Operating current	I_L	0 ... 100 mA

Release date: 2025-04-02 Date of issue: 2025-04-02 Filename: 210619_eng.pdf

Technical Data

No-load supply current	I_0	$\leq 12 \text{ mA}$
Switching state indicator		LED, yellow
Indicators/operating means		
Potentiometer		sensitivity adjustment
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed, General Purpose
Ambient conditions		
Ambient temperature		-25 ... 70 °C (-13 ... 158 °F)
Mechanical specifications		
Connection type		cable
Housing material		Stainless steel 1.4404 / AISI 316L
Sensing face		PEEK
Degree of protection		IP65
Cable		
Material		PUR
Color		black
Number of cores		3
Core cross section		0.34 mm ²
Length	L	2 m
Dimensions		
Length		70 mm
Diameter		12 mm

Connection



Installation Conditions

