



Terminal Block with Test Plug Socket KC-CTT-5GN


- 2-pin spring terminal with push-in connection technology
- For KC modules of K-System
- Integrated test sockets for connection of HART communicators
- Packaging unit: 5 pieces green

Terminal block for KC modules, 2-pin spring terminal, with test sockets, green

Function

The terminal block is suitable for KSystem applications.
The green terminal block is used for connection of field signals as well as the connection of control signals.
This terminal block has integrated test sockets for connection of HART communicators.
The terminal block can be coded with the provided coding pins KF-CP.

Dimensions

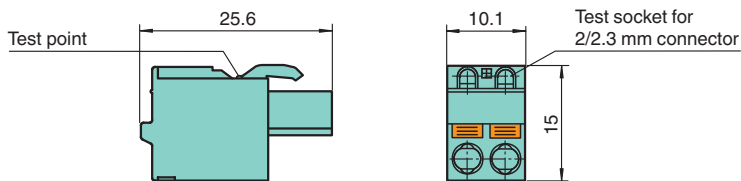

Technical Data

General specifications	
Number of pins	2
Mechanical specifications	
Core cross section	max. 2.5 mm ²
Material	
Color	green
Mass	approx. 4 g
Dimensions	10.1 x 15 x 25.6 mm (0.4 x 0.5 x 1 inch)
Construction type	spring terminal with integrated test sockets , removable
Structure	one-rowed
General information	
Packing unit	5 item(s)

Safety Information

The insulation of the removable terminal blocks protect against direct contact. The insulation conforms to a reinforced insulation acc. to EN 50178 with a rated insulation voltage of 50 V AC.

If the rated voltage greater than 50 V AC, proceed as follows:

- Switch off the voltage.
- Connect the terminal blocks or disconnect the terminal blocks.