



Safety light curtain

SLCS60



- Resolution 60 mm
- Protection field height up to 2400 mm
- Self-monitoring (type 4 according to IEC/EN 61496-1)
- SIL3 (IEC 61508)
- Degree of protection IP67
- Temperature range -35 ... 60°C (-31 ... 140 °F)
- Slim design, mounting on three sides

Safety light curtain



Function


The safety light curtain consists of a transmitter and a receiver unit. The protected area is formed by infrared light beams transmitted from the transmitter unit to the receiver unit. The spacing between the individual light beams determines the minimum obstruction size (60 mm) that can be reliably detected within the entire protected area range.

Application


- Active opto-electronic protective device (AOPD) for protection of people in danger zones and high risk areas
- Hand protection from 30 mm resolution
- Finger protection from 14 mm resolution

Dimensions

Lengths to 1200 mm

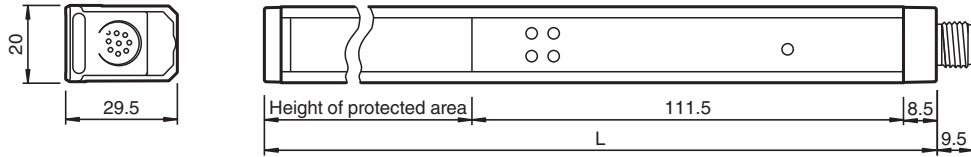

Lengths from 1300 - 2400 mm

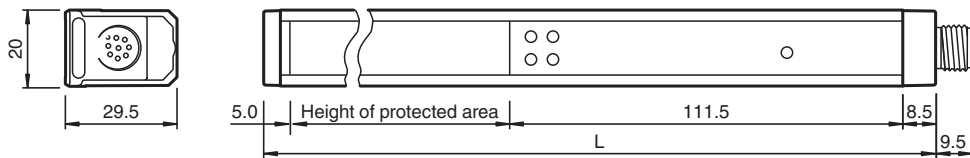

Technical Data

General specifications		
Effective detection range		0.4 ... 8 m
Light source		IREd
Light type		modulated infrared light , 850 nm
Protection field height		see Table 1, max. 2400 mm
Operating mode		Startup/restart disable, deactivateable
Optical resolution		60 mm
Opening angle		< 5 °
Ambient light limit		Not sensitive to ambient light in accordance with IEC 61496-2
UL File Number		E215245
Functional safety related parameters		
Safety Integrity Level (SIL)		SIL 3
Performance level (PL)		PL e
Category		Cat. 4
Mission Time (T _M)		20 a
PFH _d		Depending on the protection field height; see Manual
Type		4
Indicators/operating means		
Operation indicator		green: Power on
Function indicator		Green: OSSD ON , Red: OSSD OFF
Status indicator		Transmitter unit: LED yellow: Mode, test or error Receiver: LED yellow: Start readiness, function reserve or error
Electrical specifications		
Operating voltage	U _B	24 V DC (-20%, +30%) ; Power supply with safe isolation: 24 V DC

Release date: 2023-02-14 Date of issue: 2023-02-14 Filename: 270806_eng.pdf

Technical Data


No-load supply current	I_0	Transmitter unit: ≤ 150 mA Receiver: ≤ 150 mA (without outputs)
Protection class		III, IEC 61140
Power consumption	P_0	Transmitter unit: 5 W Receiver: 15 W
Input 1		
Input type		Transmitter unit test
Input format		Break contact
Switching voltage		24 V DC
Input current		5 mA
Input 2		
Input type		Transmitter unit, mode A/B
Function		Beam Code A: open or 0 V Beam Code B: 24 V DC, 5 mA
Input 3		
Input type		Receiver unit relay monitor
Input format		Break contact
Switching voltage		24 V DC
Input current		5 mA
Input 4		
Input type		Receiver unit, start release
Input format		Break contact
Input current		5 mA
Input 5		
Input type		Receiver unit, mode A/B (see transmitter unit, mode A/B)
Output		
Response time		see Table 1, max. 23 ms
Output 1		
Output type		Receiver unit OSSD
Signal output		PNP semiconductor, monitored for short and cross circuits
Switching voltage		ON: $U_B - 2 V$; OFF: $< 1 V$
Switching current		ON: max. 0.1 A; OFF: $< 5 \mu A$
Output 2		
Output type		Receiver signal output start readiness
Signal output		PNP-semiconductor, short-circuit protected, 0.1A
Conformity		
Functional safety		ISO 13849-1 ; EN 61508 part1-4
Product standard		EN 61496-1 ; IEC 61496-2
Photobiological safety		Risk group 0 according to IEC 62471
Approvals and certificates		
CE conformity		CE
UKCA conformity		UKCA
UL approval		cULus Listed
TÜV approval		TÜV SÜD
Ambient conditions		
Ambient temperature		-35 ... 60 °C (-31 ... 140 °F)
Storage temperature		-35 ... 70 °C (-31 ... 158 °F)
Relative humidity		max. 95 %, not condensing
Shock resistance		10 g, 16 ms ; stationary applications only
Vibration resistance		0.35 mm, 10 ... 55 Hz ; stationary applications only
Mechanical specifications		
Housing length L		see table 2
Degree of protection		IP67, For indoor use only

Technical Data

Connection	Transmitter unit: 4-pin, M12 x 1 connector Receiver: 8-pin, M12 x 1 connector Cable cross section min. 0.25 mm ² Max. cable length 50 m
Material	
Housing	extruded aluminum section , gold anodized
Optical face	Plastic pane , Transparent polycarbonate
Mass	see table 2
General information	
Supplementary information	EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .


Connection

Transmitter unit:



Pin	Transmitter unit
1	24 V DC
2	Mode A/B
3	0 V DC
4	Test


Receiver unit:




Pin	Receiver unit
1	Restart Interlock (RI)
2	24 V DC
3	Relay Monitor (RM)
4	Status / Select RI-RM
5	OSSD1
6	OSSD2
7	0 V DC
8	Mode A/B

Assembly

Transmitter unit

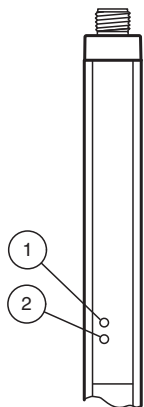


Receiver unit

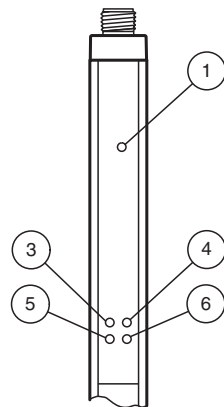

1	Power	green
2	Mode A/B, Status	yellow
3	OSSD OFF	red
4	OSSD ON	green
5	Restart/Status	yellow
6	Mode A/B	yellow

Application

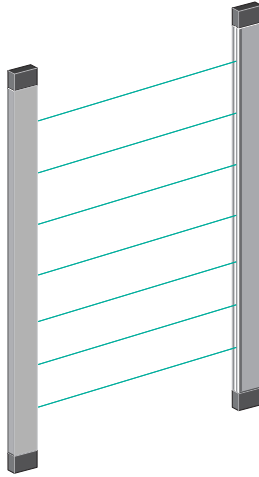

Technical Features

Table 1: Response Time

Protection field height [mm]	Response time [ms]
300	9
600	11
900	13
1200	15
1500	17
1800	19
2100	21
2400	23

Table 2: Total Length and Weight

Protection field height [mm]	Total length of transmitter/receiver unit [mm]	Weight of transmitter/receiver unit [g]
300	419	250
600	719	430
900	1019	600
1200	1319	760
1500	1625	940
1800	1925	1100
2100	2225	1270
2400	2525	1440

Type Code

S	L	C	(1)	(2)	(2)	-	(3)	(3)	(3)	(3)	-	(4)	/	(5)	(5)
----------	----------	----------	-----	-----	-----	---	-----	-----	-----	-----	---	-----	---	-----	-----

SLC	Device
SLC	Safety light curtain

(1)	Safety light curtain type
S	Self-monitoring, type 4
T	Testing, type 2

(2)	Resolution
14	14 mm
30	30 mm
60	60 mm
90	90 mm

(3)	Protection field height
100	100 mm
200	110 mm
300	300 mm
...	...
2400	2400 mm


















Release date: 2023-02-14 Date of issue: 2023-02-14 Filename: 270806_eng.pdf

Type Code










(4)	Principle
T	Transmitter
R	Receiver

(5)	Option
35	Extended detection range

Accessories

	TR 14/30/50/60	Test rod for safety light curtain SLCT
	AA SLCT-01	Profile alignment aid; simplified alignment of the SLCS and SLCT safety light curtains
	OMH-SLCT-100-1200	Mounting base for floor mounting and cover plate
	OMH-SLCT-100-1500	Mounting base for floor mounting and cover plate
	OMH-SLCT-100-2100	Mounting base for floor mounting and cover plate
	OMH-SLCT-100-2500	Mounting base for floor mounting and cover plate
	OMH-SLCT-110-1200	Mounting base for floor mounting with rear panel and cover plate
	OMH-SLCT-110-1500	Mounting base for floor mounting with rear panel and cover plate
	OMH-SLCT-110-2100	Mounting base for floor mounting with rear panel and cover plate
	OMH-SLCT-120-1200	Side protection for mounting base
	OMH-SLCT-120-1500	Side protection for mounting base
	OMH-SLCT-120-2100	Side protection for mounting base
	OMH-SLCT-120-2500	Side protection for mounting base
	OMH-SLCT-200	Floor mount
	SLCT-M-01-1200	Inclined mirror for stable 90° deflection with cover plate
	SLCT-M-01-1500	Inclined mirror for stable 90° deflection with cover plate
	SLCT-M-01-2100	Inclined mirror for stable 90° deflection with cover plate

Accessories

	OMH-SLCT-10	Clamp mounting suitable for 6 mm ... 11.5 mm groove
	OMH-SLCT-11	Reverse clamp mounting suitable for 8.5 mm ... 10.5 mm groove
	OMH-SLCT-12-500	Mounting bracket, muting arm with round rod d=12 mm
	OMH-SLCT-01	Quick clamp and adjustment system
	OMH-SLCT-02	Attachment aid for OMH-SLCT-01
	OMH-SLCT-03	Mounting bracket including adjustment
	OMH-SLCT-04	Mounting bracket including adjustment (with loose bearing)
	OMH-SLCT-05	Mounting bracket including adjustment
	OMH-SLCT-06	Swivel Bracket