




Cable Glands, Metal, for non-armored Cables

CG.NA.M16.SS.C.16.K50

- For cables without armor
- Stainless Steel
- Thread M16
- Seal chloroprene
- Ex db, Ex eb and Ex tb certified
- Suitable for operation in Zone 1, Zone 2, Zone 21 and Zone 22
- Degree of protection IP66
- Packaging unit: 50 pieces, without accessories



Dimensions

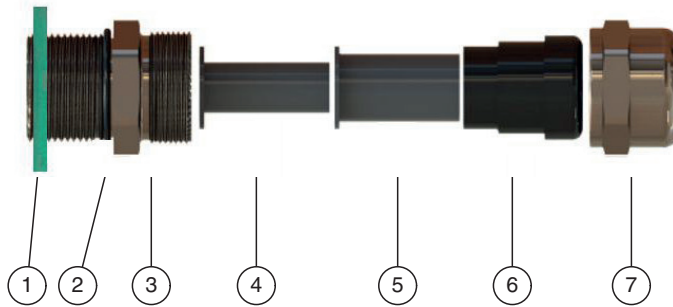

Dimensions



Details see data table

| Legend | |
|--------|--|
| 1 | Washer gasket (accessory) |
| 2 | O-Ring |
| 3 | Gland body basis |
| 4 | Seal insert S3 |
| 5 | Seal insert S2 |
| 6 | Seal insert S1 |
| 7 | Cap nut |
| D | Clamping range, cable sheath diameter |
| D2 | Width across corners |
| H | Length outside enclosure |
| L | Total length |
| S* | Clamping range, seal insert combinations |
| SW* | Width across flats |
| TD | Thread size |
| TL | Thread length |

Release date: 2022-10-13 Date of issue: 2022-10-13 Filename: 400713_eng.pdf

Technical Data

Mechanical specifications

Technical Data

| | |
|--|--|
| Cable type | non-armored cables |
| Clamping range (D) | 4 ... 12 mm |
| Seal combination S1 | 9 ... 12 mm |
| Seal combination S1+S2 | 6 ... 9 mm |
| Seal combination S1+S2+S3 | 4 ... 6 mm |
| Thread type | metric ISO pitch 1.5 mm |
| Thread size (TD) | M16 |
| Degree of protection | IP66 / IP68 |
| Material | |
| Finish | inherent color silver |
| Cable gland | stainless steel |
| Washer gasket | aramid fibers bonded with NBR |
| O-Ring | chloroprene |
| Seal insert | chloroprene |
| Mass | |
| Individual component | approx. 49 g |
| Packing unit | approx. 2.7 kg |
| Dimensions | |
| Width across corners (D2) | 24 mm |
| Diameter thru-hole (DT) | 16 ... 16.2 mm |
| Length outside enclosure (H) | 33 mm |
| Width across flats (SW1) | 22 mm |
| Width across flats (SW2) | 22 mm |
| Thread length (TL) | 16 mm |
| Total length (L) | 49 mm |
| Tightening torque | |
| Nut torque at enclosure (SW1) | 4 Nm |
| Nut torque 2 with seal S1 (SW2) | 15 Nm |
| Nut torque 2 with seals S1+S2 (SW2) | 18 Nm |
| Nut torque 2 with seals S1+S2+S3 (SW2) | 20 Nm |
| Ambient conditions | |
| Ambient temperature | -40 ... 80 °C (-40 ... 176 °F) washer gasket -40 ... 80 °C (-40 ... 176 °F) |
| Data for application in connection with hazardous areas | |
| EU-type examination certificate | IMQ 14 ATEX 012X |
| Marking | Ⓜ II 2 GD Ex db IIC Gb Ex eb IIC Gb Ex tb IIC Db |
| International approvals | |
| IECEx approval | IECEx IMQ 14.0004X |
| UKCA approval | CML 21 UKEX 11380X |
| INMETRO approval | DNV 20.0029 X |
| EAC approval | RU C-DE.AA87.B.00459/20 |
| CCC approval | 2021312313000344 |
| Conformity | |
| Degree of protection | EN 60529 |
| General information | |
| Delivery quantity | 50 |
| Scope of delivery | Cable glands brief instructions (1 copy) |
| Supplementary information | EC-Type Examination Certificate, Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com . |
| Accessories | |
| Sealing plugs | BP.NA.M16-M20S.PA |