


Glass fiber optic LLE 04-1,6-1,0-G



- Chemical-resistant
- Thread M6

Glass fiber optic - thru-beam with metal silicone covering

Dimensions

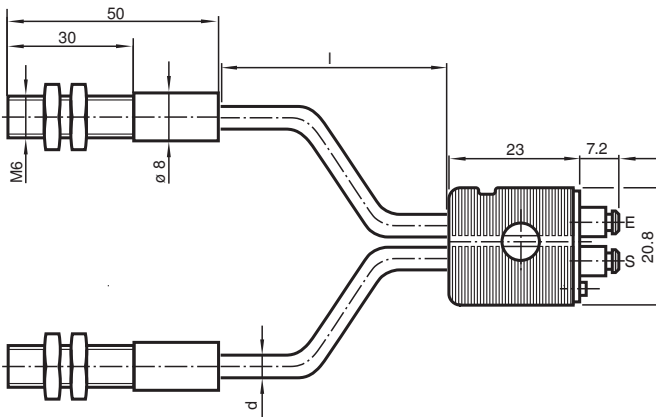

Technical Data

General specifications

Fiber optic length	l	1000 mm
Fiber optic diameter	d	7.3 mm
Adapter form		04
End piece		thread
Bending radius		min. 20 mm
Fiber bundle diameter		1.8 mm optical face: 2.5 mm ²
Angle of divergence		approx. 68 °

Approvals and certificates

Approvals	CE
-----------	----

Ambient conditions

Ambient temperature	-20 ... 85 °C (-4 ... 185 °F) [Adapter] -40 ... 180 °C (-40 ... 356 °F) [End head and Covering]
Storage temperature	-20 ... 85 °C (-4 ... 185 °F)

Mechanical specifications

Degree of protection	IP65
Material	

Release date: 2021-07-07 Date of issue: 2021-07-07 Filename: 415614_eng.pdf

Technical Data

Optical face	glass
Sheathing	Metal-silicon
Core	Glass fiber
End piece	Stainless steel 1.4305 / AISI 303
Adapter	PVC
Extraction force	at probe at 20°C: 120 N
Fiber optic amplifiers	
Device series	MLV41-LL

Application

Attention:

Fiber optics must not be twisted or kinked. Excessive tensile loads will lead to destruction. Contact with petrol or organic solvents must be prevented.

