

RFID Transponder

IPC03-C1 10pcs




- Battery-free data carrier
- 32 bit fixcode
- 928 bits memory available
- Readable and writable from both sides
- Degree of protection IP68
- ISO credit card format

Data carrier



Dimensions

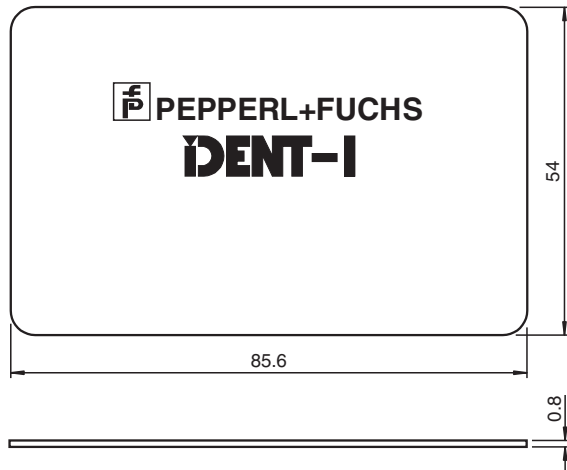

Technical Data

General specifications	
Operating frequency	125 kHz
Transfer rate	2 kBit/s
Color	white
Memory	
Chip Type	EM4450 Titan (EM Microelectronic)
EEPROM	928 Bit
Read cycles	unlimited
Write cycles	> 100000
Data retention period	10 years at 55 °C (131 °F)
Directive conformity	
Radio equipment	
Directive 2014/53/EU	EN 300330
RoHS	
Directive 2011/65/EU (RoHS)	IEC/EN 63000
Standard conformity	
Degree of protection	EN 60529

Release date: 2025-04-23 Date of issue: 2025-04-23 Filename: 70113490_eng.pdf

Technical Data

RFID	ISO/IEC 18000-2
Ambient conditions	
Ambient temperature	-25 ... 50 °C (-13 ... 122 °F)
Storage temperature	-25 ... 50 °C (-13 ... 122 °F)
Mechanical specifications	
Degree of protection	IP68
Material	
Housing	PVC
Installation	
In air	yes
Mass	6 g
Dimensions	
Height	0.8 mm
Width	54 mm
Length	85.6 mm
Construction type	Card
Note	Packaging unit, 10-piece

Application

The transponder can be read and written from either side.