



PROFINET IO Gateway

ICDM-RX/PN-DB9/RJ45-PM

- Panel mounting and DB9 connector
- PROFINET IO: connect serial and Ethernet TCP/IP devices to PROFINET IO controllers and TCP/IP applications
- RS-232/422/485 software selectable interfaces
- Web-based configuration


PROFINET IO Gateway 1-port panel mount DB9



Function

The ICDM-RX/PN product family enables connection of serial devices (RS-232 / RS-422 / RS-485) or Ethernet TCP/IP devices to an Industrial PROFINET network. Highly advanced raw/ASCII device interface functionality simplifies PLC programming and ensures robust operation. These features greatly simplify connecting devices such as barcode scanners, RFID readers, weigh scales, vision systems, printers, encoders, and sensors to PLCs. The integrated webserver enables complete configuration of all module parameters like serial interface, baud rate, or delimiting characters. Products are available in different versions for DB9 or screw terminal connection.

Dimensions

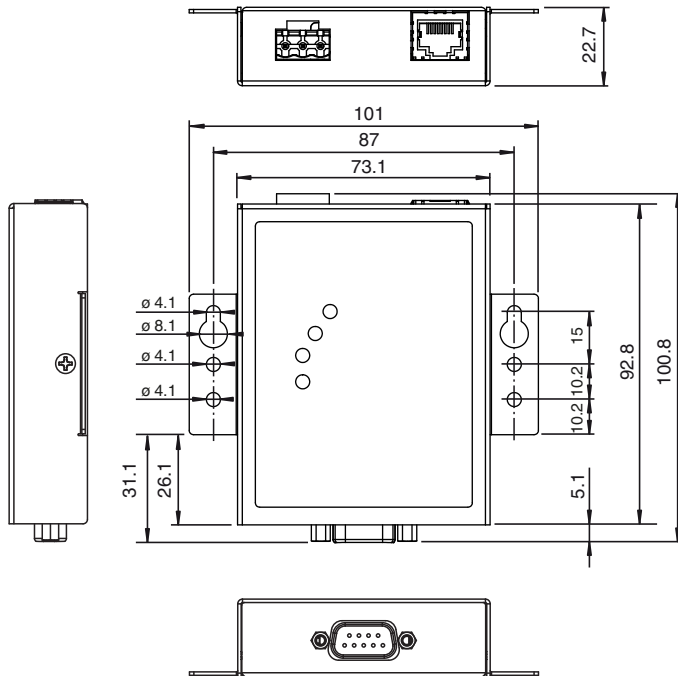

Technical Data


General specifications	
UL File Number	E185802
MTBF	48.4 a
Indicators/operating means	

Release date: 2024-04-25 Date of issue: 2024-04-25 Filename: 70114018_eng.pdf


Technical Data

LED indication		see manual
Electrical specifications		
Rated operating voltage	U _e	5 ... 30 V DC
Nominal voltage		24 V DC
Interface		
Interface type		Software selectable interfaces: RS-232 , RS-422 , RS-485 (2 and 4-wire)
Physical		1 x DB9
Protocol		Raw serial
Supported baud rates		300 bps to 230Kbps
Interface 1		
Interface type		Industrial Ethernet
Physical		1 x RJ45
Protocol		PROFINET IO
Additional protocols		ARP, BOOTP, DHCP/RARP, HTTP, HTTPS, SSH, SSL/TLS, ICMP, RFC 1006 (ISO over TCP), SNMP (MIB-II), TCP/IP & UDP socket services, Telnet, and TFTP, and supports IP multicast data transmission
Transfer rate		10/100 Mbps
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61000-6-2:2005 , EN 61000-6-4:2007 + A1:2011
RoHS		EN IEC 63000:2018
Standard conformity		
Electrical safety		CSA C22.2 No. 60950 / CSA C22.2 No. 60950/UL60950
Emitted interference		EN 61000-6-4, EN 55032, FCC Part 15 Subpart B, ICES-003, AS/NZS CISPR 32
Noise immunity		EN 61000-6-2
Ambient conditions		
Ambient temperature		-40 ... 75 °C (-40 ... 167 °F)
Storage temperature		-40 ... 85 °C (-40 ... 185 °F)
Relative humidity		max. 95 %
Altitude		0 ... 3048 m
Mechanical specifications		
Degree of protection		IP20
Connection		Power Supply: pluggable screw terminal Fieldbus: 1 x RJ45 Inputs/outputs: 1 x DB9
Material		
Housing		stainless steel
Mass		220g
Dimensions		
Height		71.1 mm
Width		20.3 mm
Length		91.4 mm
Construction type		Cabinet module
Mounting		panel mount

Connection

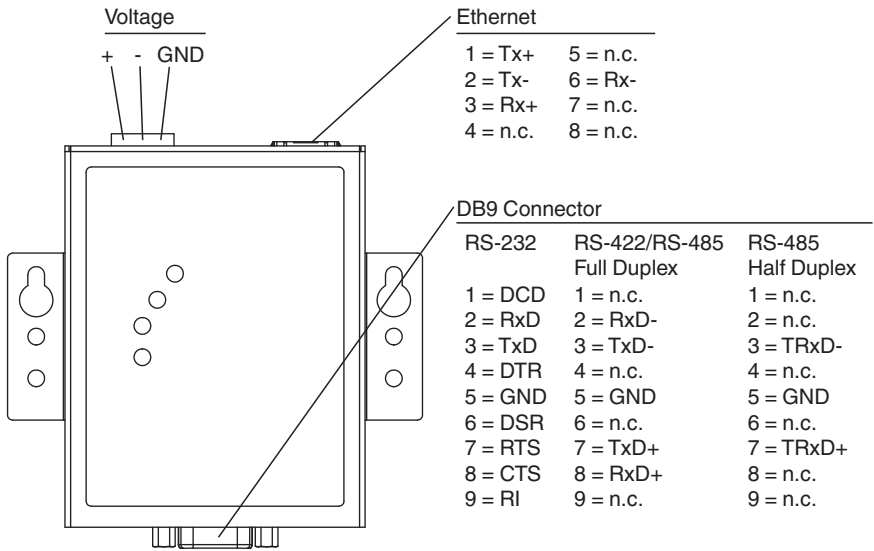

Indication

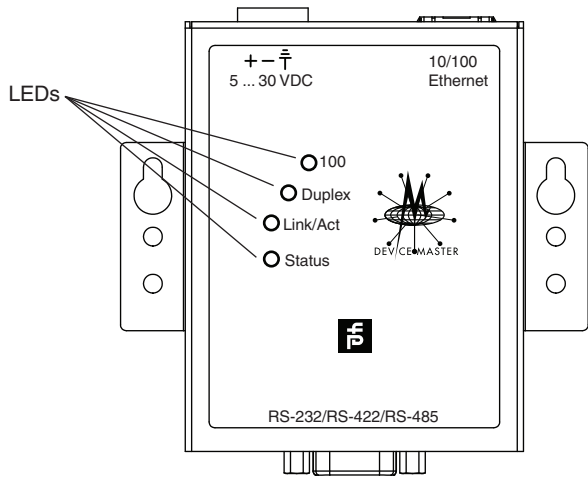

Release date: 2024-04-25 Date of issue: 2024-04-25 Filename: 70114018_eng.pdf