



2-D LiDAR Sensor OBD60M-R2000-1L-Y70132754



- 4 freely programmable monitoring fields
- 4 inputs/outputs (selectable)
- High operating range
- High angle resolution
- 360°-angle of measurement
- Measuring method PRT (Pulse Ranging Technology)


R2000 Detection, 2-D LiDAR sensor for precise field monitoring, measuring range to object up to 60 m



Function

Based on Pulse Ranging Technology (PRT), the sensor is powerful for measurements with a long range and a small light spot. The device scans its environment over the complete measuring angle of 360°. Due to the high scanning frequency, this sensor type is suitable for advanced applications. The device meets laser class 1 and is eye safe. Additional precautions to protect the operating personnel are not required. The interactive all-round display integrated in the optical surface can freely display individual texts and graphics. A wide range of accessories enables the sensor to be used in different applications. A PACTware device type manager (DTM) specially developed for this series offers extensive configuration and diagnostic options.

Dimensions

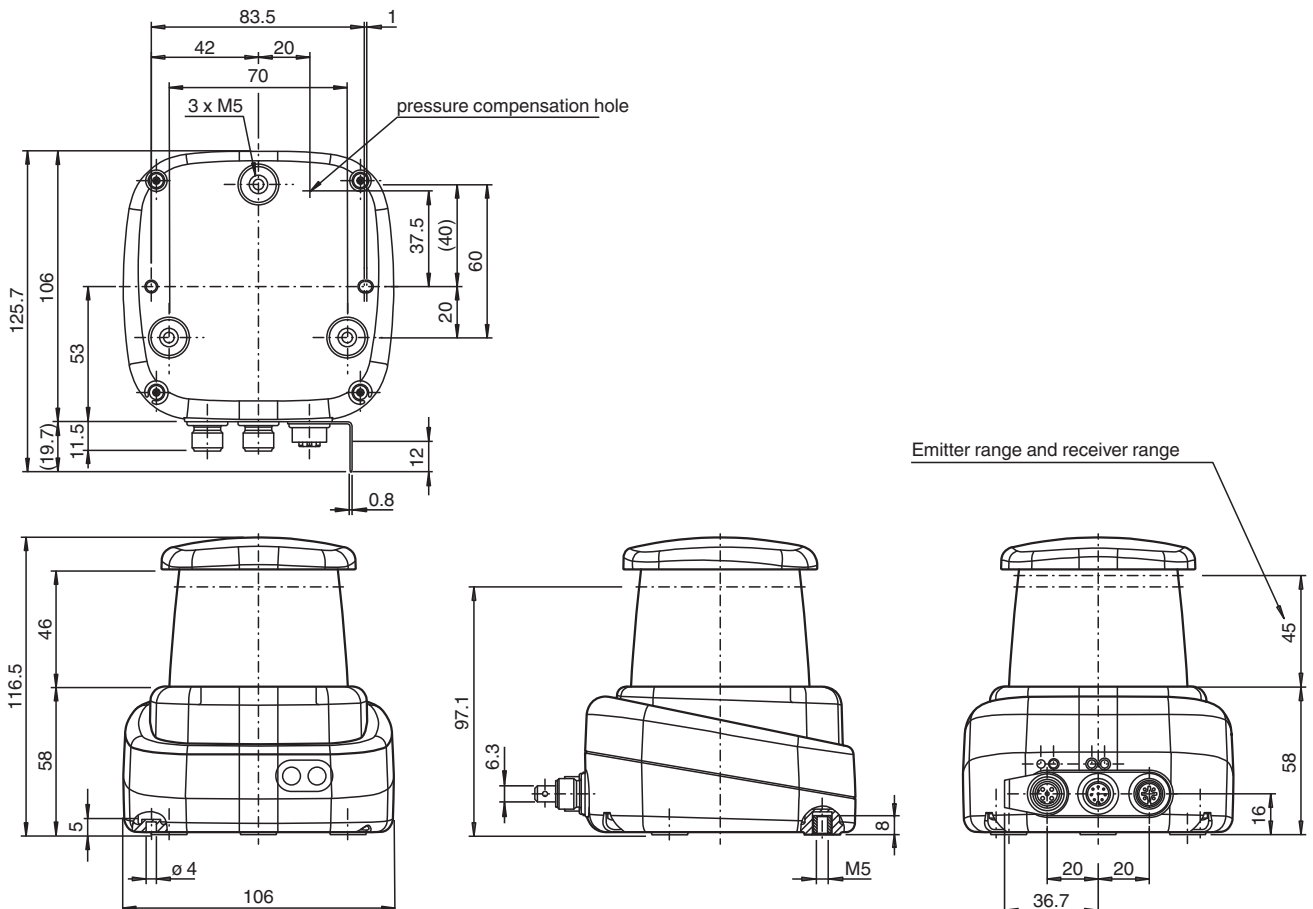

Release date: 2025-02-03 Date of issue: 2025-02-03 Filename: 70132754_eng.pdf

Technical Data


General specifications		
Measuring range		0.1 ... 20 m (black 10 %) 0.1 ... 60 m (white 90 %) 0.1 ... 60 m (reflector) Min. reflectivity 1.8 %
Light source		laser diode
Light type		modulated infrared light
Lasers nominal ratings		
Note		LASER RADIATION , DO NOT STARE INTO BEAM
Laser class		1
Wave length		905 nm
Beam divergence		transversal 10 mrad , longitudinal 2 mrad
Pulse length		5 ns
Repetition rate		54 kHz
max. pulse energy		< 94 nJ
Measuring method		Pulse Ranging Technology (PRT)
Scan rate		10 Hz, 20 Hz, 30 Hz
Scanning angle		360°
Diameter of the light spot		105 mm x 25 mm at 10 m
Ambient light limit		50000 Lux
Functional safety related parameters		
MTTF _d		75 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Indicators/operating means		
Operation indicator		LED green
Data flow indicator		LED yellow: active ethernet LED green: Ethernet link
Function indicator		LED red: fault LED yellow: Q1 + Q2
Control elements		2 Button
Parameterization indicator		24 x 252 pixels , red
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC
Ripple		10 % within the supply tolerance
No-load supply current	I ₀	≤ 400 mA / 24 V DC
Power consumption	P ₀	< 10 W
Time delay before availability	t _v	< 40 s
Integrated application		
Application		Field monitoring
Number of fields		4
Response time		30 ms + 1 Scan duration
Detectable object shape		Almost any
Object size		> 1 mm
Linking fields		Up to 4 x 3 levels
Interface		
Interface type		4 x switching inputs/outputs (selectable)
Input/Output		
Input/output type		4 Inputs/Outputs , Independently configurable , short circuit/reverse polarity protected
Input		
Switching threshold		low: U _e < 5 V, high: U _e > 10 V
Output		
Switching threshold		low: U _a < 1 V, high: U _a > U _b - 2 V
Switching current		100 mA per output

Release date: 2025-02-03 Date of issue: 2025-02-03 Filename: 70132754_eng.pdf

Technical Data


Conformity	
Product standard	IEC 61000-6-2
Shock resistance	EN 60068-2-27
Vibration resistance	EN 60068-2-6
Laser safety	EN 60825-1:2014
Measurement accuracy	
Measuring speed	54000 measurements per second
Angle resolution	0,071°; 0,15°; 0,2°
Repeat accuracy	< 12 mm
Approvals and certificates	
Protection class	III (operating voltage 50 V)
UL approval	cULus Listed, Class 2 Power Source, Type 1 enclosure
CCC approval	CCC approval / marking not required for products rated ≤36 V
FDA approval	IEC 60825-1:2014 Complies with 21 CFR 1040.10 and 1040.11 except for conformance with IEC 60825-1 Ed. 3 as described in Laser Notice 56, dated May 8, 2019.
Ambient conditions	
Ambient temperature	-10 ... 50 °C (14 ... 122 °F)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)
Relative humidity	95 % , no moisture condensation
Mechanical specifications	
Degree of protection	IP65
Connection	4-pin, M12x1 connector, standard (supply) , 8-pin, M12x1 connector, A-coded (MultiPort) , 4-pin, M12x1 socket, D-coded (LAN)
Material	
Housing	ABS + PC + Aluminum
Optical face	PMMA
Mass	approx. 0.8 kg
Dimensions	
Height	116.5 mm
Width	106 mm
Length	106 mm

Connection Assignment

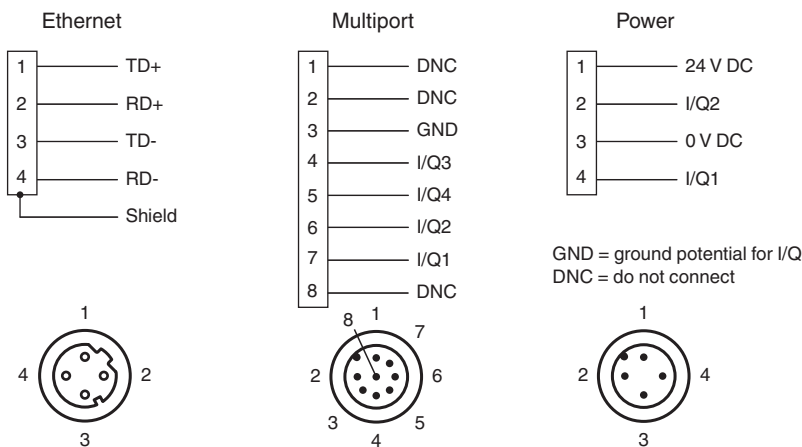

Release date: 2025-02-03 Date of issue: 2025-02-03 Filename: 70132754_eng.pdf

Assembly

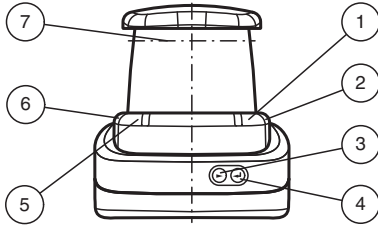

1	Operating status	green
2	Fault indication	red
3	Menu button	
4	Menu button	
5	Q2 signal indicator	yellow
6	Q1 signal indicator	yellow
7	Laser outlet	