



Bulk Raw Cable


CBL-PUR-A1-OR-04x034-100M

- Improved resistance to weld slag
- Suitable for drag chains and abrasion resistant
- Suitable for robotic applications / torsion resistant
- Free of paint wetting interfering substances
- Resistant to microbes and hydrolysis
- cURus approval
- Halogen-free
- Meets the VASS6 standard

Cable, PUR/PP, 4-core welding-bead resistant orange, UL approved, drag chain suitable, torsion resistant



Dimensions

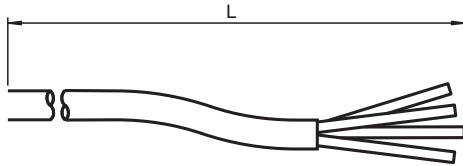

Technical Data

Electrical specifications

Operating voltage	U_B	max. 300 V AC/DC
-------------------	-------	------------------

Conformity

Flammability	UL 1581; DIN EN 60332-2-2
Halogen-free	DIN VDE 0472-815
Oil resistance	DIN EN 60811-2-1

Approvals and certificates

UL approval	AWM STYLE 20549 AWM I/II A/B 80°C 300V FT2
-------------	--

Ambient conditions

Ambient temperature	
Cable, fixed installation	-40 ... 80 °C (-40 ... 176 °F)
Cable, flexing	-25 ... 80 °C (-13 ... 176 °F)
Pollution degree	3

Mechanical specifications

Cable	according to IEC/EN 60228 (DIN VDE 0295) class 6
Sheath diameter	4.9 mm ± 0.2 mm
Bending radius	> 10 x cable diameter, movable installation > 5 x cable diameter, fixed installation
Sheath stripping force	max. 80 N / 300 mm
Sheath color	orange (similar to RAL 2003)
Number of cores	4
Core cross section	0.34 mm ²
Cores color	Core 1: brown Core 2: white Core 3: blue Core 4: black

Release date: 2025-02-14 Date of issue: 2025-02-14 Filename: 70141161_eng.pdf

Technical Data

Core construction		42 x 0.1 mm Ø
Length	L	100 m
Cable code		Li F 9Y 11Y 4 x 0,34
Drag chain suitability		
Drag chain cycles		min. 5000000
Motion velocity		max. 3 m/s
Traverse distance		max. 5 m
Acceleration		max. 5 m/s ²
Torsion cycles		min. 1000000
Torsional stress		± 180 °/m
Mass		3135 g
Material		
PWIS free		yes
Halogen-free		yes
Cable		
Sheathing		PUR based on polyether
Coors		bare copper (Cu)
Core insulation		PP
Welding-bead resistance		yes
Weld spatter resistance		yes
Chemical resistance		good
Oil resistance		yes
Cooling lubricant resistance		yes
Microbial resistance		yes
Hydrolysis resistance		yes
Flammability		FT2

Connection Assignment

————— ······ —————	BN
————— ······ —————	WH
————— ······ —————	BU
————— ······ —————	BK