

RFID Transponder

IUC77-28L90-M-FR2 25pcs




- Operating frequency: 902 MHz ... 928 MHz
- Complies with EPC Gen2 (ISO/IEC 18000-63)
- Robust, adhesive plastic label
- Optimized for mounting on metal

RFID Transponder



Dimensions

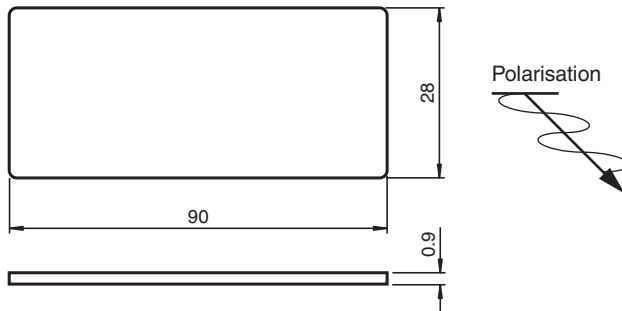

Technical Data

General specifications	
Operating frequency	902 ... 928 MHz
Polarization	linear
Memory	
Chip Type	Monza 4QT (Impinj)
Memory Bank 00 (Reserved)	64 Bit
Memory Bank 01 (EPC/UII)	128 Bit
Memory Bank 10 (TID)	96 Bit
Memory Bank 11 (User memory)	512 Bit
Read cycles	unlimited
Write cycles	> 100000
Data retention period	10 years
Directive conformity	
Radio equipment	
Directive 2014/53/EU	EN 302208
RoHS	
Directive 2011/65/EU (RoHS)	IEC/EN 63000

Release date: 2023-08-09 Date of issue: 2023-08-09 Filename: 70141972_eng.pdf

Technical Data**Standard conformity**

Degree of protection	EN 60529
RFID	ISO/IEC 18000-63

Ambient conditions

Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)

Mechanical specifications

Housing length	90 mm
Housing width	28 mm
Housing height	0.9 mm
Degree of protection	IP68
Material	PP surface, ferrite film, acrylic adhesive
Installation	Adhesive
On metal	yes
Mass	3 g
Construction type	Label
Note	Packaging unit, 25-piece