



Retroreflective area sensor OGR4000-R305-2EP-IO



- Retroreflective area sensor with five light beams in a standard photoelectric sensor enclosure
- Bright, highly visible transmitter beams guarantee convenient alignment of the sensor
- Reliable detection of all surfaces irrespective of the object texture
- Reliable small part detection for very flat objects with an irregular shape
- Constant object detection from 2 mm within the entire detection area


Retroreflective area sensor, red light, max. detection range 4 m, light field height 60 mm, IO-Link interface, 2 push-pull outputs, fixed cable



Function

The retroreflective area sensor contains several emitters and a receiver in a single housing. With a suitable reflector, the device can achieve a range of up to 4 m. Up to a range of 1.5 m, small parts from 2 mm in size can be precisely detected without multiple switching. The device specializes in the reliable detection of flat and irregularly shaped objects. Quick and easy commissioning, as well as additional functions such as suppression of conveyor belts or measurement of object height and data output via IO-Link, round off the range of features offered by the device.

Dimensions

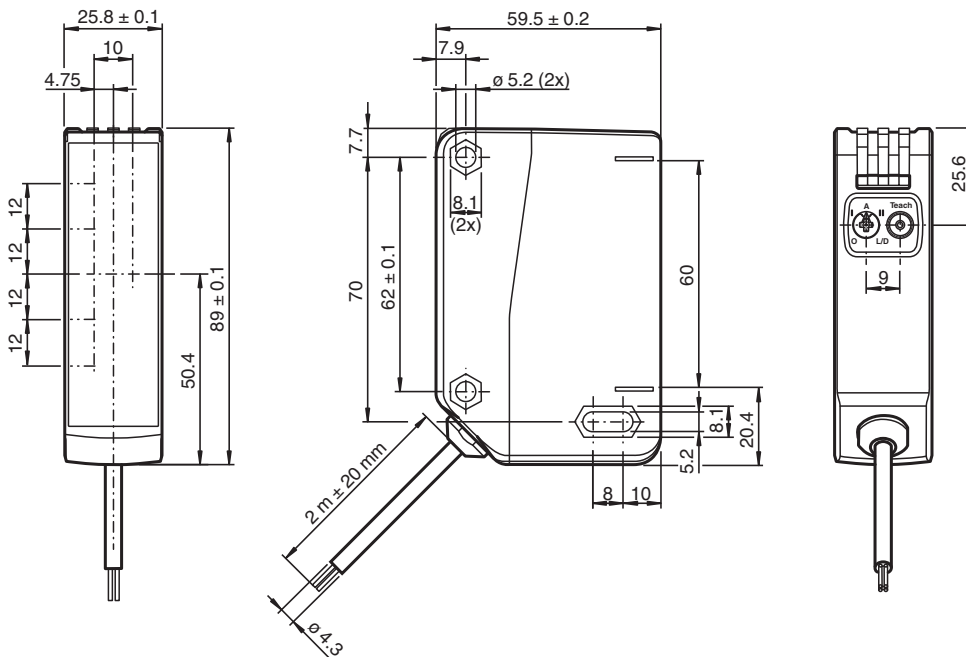

Technical Data

General specifications

Effective detection range	Standard mode: 0 ... 4 m High resolution: 0 ... 2 m
Reflector distance	0.2 ... 4 m H85-2 reflector
Threshold detection range	4 m
Sensing range	see table

Release date: 2025-06-14 Date of issue: 2025-06-14 Filename: 70154432_eng.pdf


Technical Data

Reference target	H85-2 reflector	
Light source	LED	
Light type	modulated visible red light	
LED risk group labelling	exempt group	
Field height	60 mm	
Field width	12 mm	
Object size	Minimum 2 mm, 3 mm, 5 mm, 8 mm, 10 mm; position-independent detection within detection range	
Number of beams	5	
Opening angle	± 2 °	
Ambient light limit	EN 60947-5-2	
Resolution	see table	
Functional safety related parameters		
MTTF _d	674 a	
Mission Time (T _M)	20 a	
Diagnostic Coverage (DC)	0 %	
Indicators/operating means		
Operation indicator	LED green: constantly on - power on flashing (4Hz) - short circuit flashing with short break (1 Hz) - IO-Link mode	
Function indicator	Yellow LED: Permanently on: light path clear Permanently off: object detected Flashing (8 Hz) - end of compensation	
Control elements	Teach-In key	
Control elements	5-step rotary switch for operating modes selection	
Electrical specifications		
Operating voltage	U _B	10 ... 30 V DC IO-Link mode: 18 ... 30 V DC
Ripple	max. 10 %	
No-load supply current	I ₀	< 35 mA at 24 V supply voltage
Protection class	III	
Interface		
Interface type	IO-Link	
IO-Link revision	1.1	
Device profile	Identification and Diagnosis - I&D Smart Sensor - SSP 2.1	
Process data	Input 8 Bit - switching signal 1 Bit - stability alarm 1 Bit - measurement value 6 Bit Output 2 Bit - sensor control function 1 Bit - evaluation control function 1 Bit	
Vendor ID	1 (0x0001)	
Device ID	0x101001 (1052673)	
Transfer rate	COM2 (38.4 kBit/s)	
Min. cycle time	2.3 ms	
SIO mode support	yes	
Compatible master port type	Class A , Class B (use 3-pole adapter or 3-wire cable)	
Output		
Switching type	The switching type of the sensor is adjustable. The default setting is: C/Q - BK: NPN normally open / dark-on, PNP normally closed / light-on, IO-Link /Q - WH: NPN normally closed / light-on, PNP normally open / dark-on	
Signal output	2 push-pull (4 in 1) outputs, short-circuit protected, reverse polarity protected, overvoltage protected	
Switching voltage	max. 30 V DC	
Switching current	max. 100 mA	
Voltage drop	U _d	≤ 1.5 V DC


Technical Data

Switching frequency	f	Standard mode: 500 Hz , High resolution: 250 Hz
Response time		Standard mode: 1 ms , High resolution: 2 ms
Conformity		
Communication interface		IEC 61131-9 / IO-Link V1.1.4
Product standard		EN 60947-5-2
Approvals and certificates		
UL approval		E87056 , cULus Listed , class 2 power supply , type rating 1
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-40 ... 60 °C (-40 ... 140 °F) The permissible minimum ambient temperature during teach-in is -30 °C. The permissible temperature change after teach-in is ±20 K.
Storage temperature		-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications		
Degree of protection		IP67
Connection		2 m fixed cable
Material		
Housing		PC (Polycarbonate)
Optical face		Plastic pane
Mass		132 g
Dimensions		
Height		89 mm
Width		25.8 mm
Depth		59.5 mm


Connection Assignment

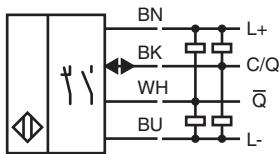

Assembly

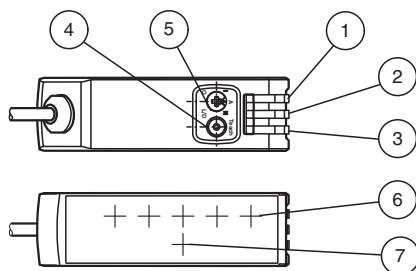

1	Operating indicator light on	GN
2	Signal indicator	YE
3	Operating indicator dark on	GN
4	Teach-in push button	
5	Operating mode selector switch	
6	Emitter	
7	Receiver	



O	Keylock, operating mode, teach-in button is disabled
I	High resolution mode
A	Alignment mode
II	Standard resolution mode
L/D	Light on/dark on


Release date: 2025-06-14 Date of issue: 2025-06-14 Filename: 70154432_eng.pdf

Characteristic Curve


Minimum Detectable Object (MDO)

High Resolution Mode


REF-H85-2

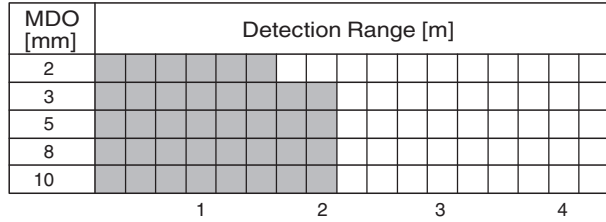


REF-A80

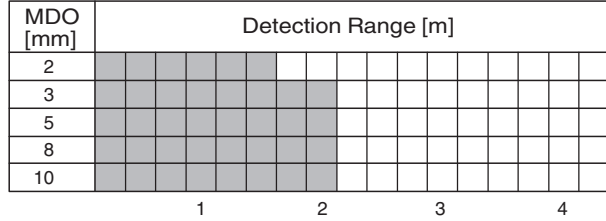

REF-H60-3

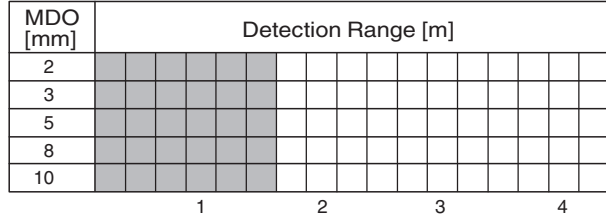


OFR-100/100

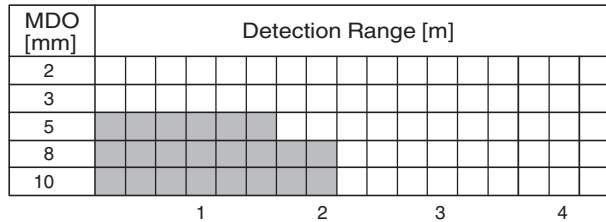


Standard Mode


REF-H85-2

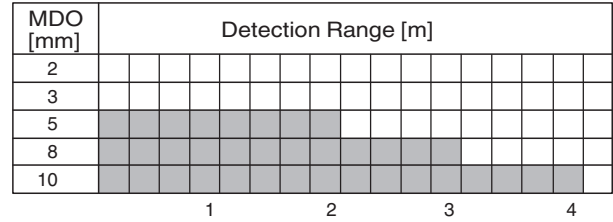


REF-A80

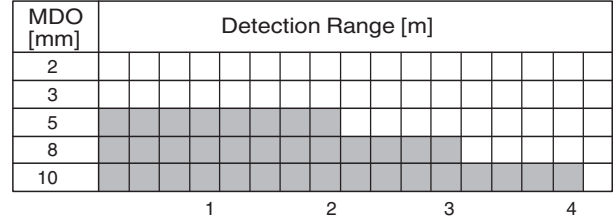

REF-H60-3


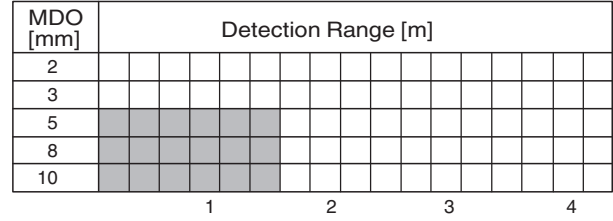


OFR-100/100

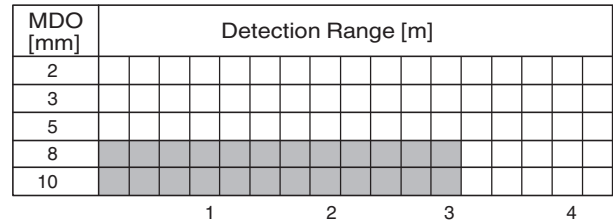


Relative received light strength

Reflector type:

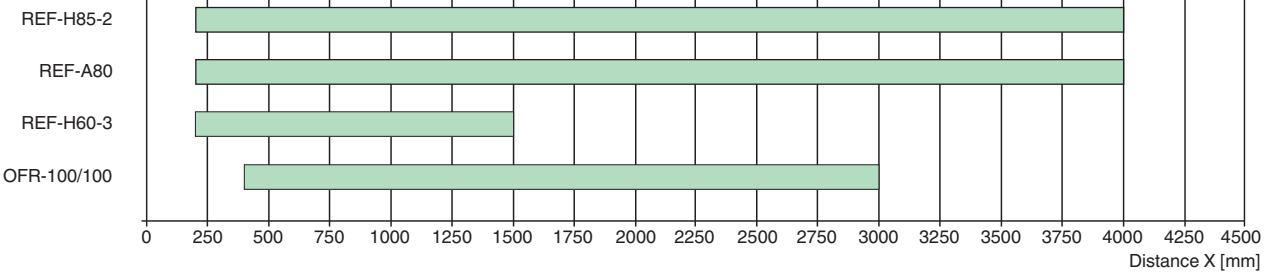

Release date: 2025-06-14 Date of issue: 2025-06-14 Filename: 70154432_eng.pdf

Characteristic Curve

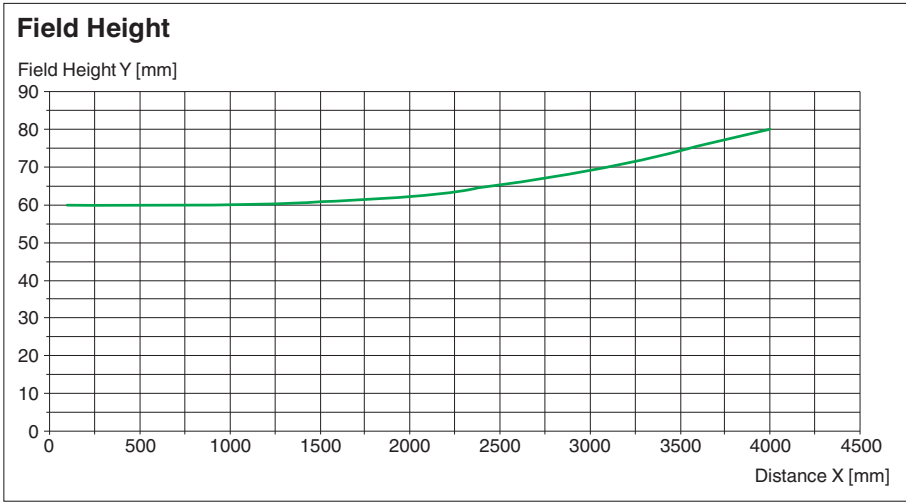

Technical Features

Resolution

Operating mode	High resolution mode	Standard mode
Effective detection range	0 ... 2 m	0 ... 4 m
Resolution	2 mm: 0 ... 1.5 m 3 mm: 0 ... 2 m	5 mm: 0 ... 2 m 8 mm: 0 ... 3 m 10 mm: 0 ... 4 m

Release date: 2025-06-14 Date of issue: 2025-06-14 Filename: 70154432_eng.pdf