

Relay Module

KFD2-RSH-1.2E.L2


- 1-channel signal conditioner
- 24 V DC supply
- Logic input 19 V DC ... 26.4 V DC
- Recommended connectable voltage 8 V DC ... 60 V DC
- Relay contact output for energized to safe function
- Line fault transparency (LFT)
- Diagnostic function
- Up to SIL 3 acc. to IEC/EN 61508

CE SIL3

Function

This signal conditioner provides the galvanic isolation between field circuits and control circuits. The device is a relay module that is suitable for safely switching applications of a load circuit. The device isolates load circuits up to 60 V DC and the 24 V DC control circuit. The energized to safe (ETS) function is permitted for SIL 3 applications. An internal fault or a line fault is signaled by the impedance change of the relay contact input and an additional relay contact output. A fault is signaled by LEDs and a separate collective error message output.

Connection

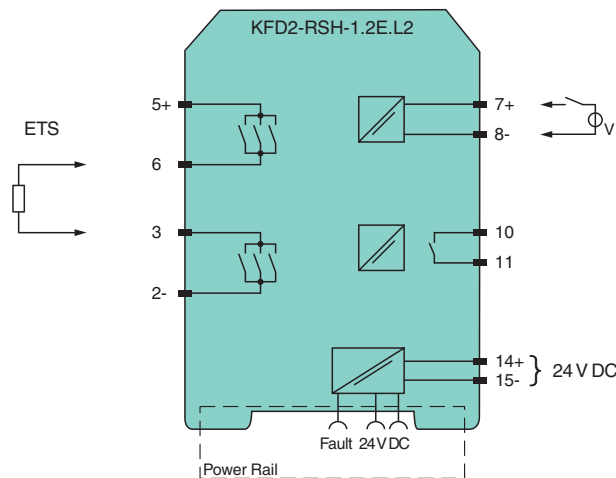

Technical Data

General specifications

Signal type Digital Output

Functional safety related parameters

Safety Integrity Level (SIL) SIL 3

Systematic capability (SC) SC 3

Supply

Connection Power Rail or terminals 14+, 15-

Rated voltage U_r 19 ... 26.4 V DC

Input current max. 35 mA at 24 V DC , max. 44 mA at 19 V DC , with enabled internal fault detection

Power consumption < 1.7 W , includes the power consumption of the digital input , see derating curves

Input

Release date: 2024-02-02 Date of issue: 2024-02-02 Filename: 70172205_eng.pdf

Technical Data


Connection side		control side
Connection		terminals 7+, 8-
Pulse/Pause ratio		min. 150 ms / min. 150 ms with disabled internal fault detection min. 1 s / min. 1 s with enabled internal fault detection
Test pulse length		max. 2 ms from DO card
Signal level		0-signal: -5 ... 5 V DC 1-signal: 19 ... 26.4 V DC
Rated current	I_r	0-signal: typ. 1.6 mA at 1.5 V DC; typ. 8 mA at 3 V DC (maximum leakage current DO card) 1-signal: ≥ 36 mA (minimum load current DO card)
Inrush current		< 200 mA after 100 μ s
Output		
Connection side		field side
Connection		external voltage : terminals 5+, 2- load : terminals 6, 3
Connectable voltage		8 ... 60 V DC
Power dissipation		< 3.3 W at 5 A , see derating curves
Contact loading		30 V DC / 5 A resistive load , see derating curves
Minimum switch current		10 mA
Mechanical life		5×10^6 switching cycles
Line fault detection		low voltage < 5 V DC undercurrent: 10 mA DC; overcurrent: 2.2 A DC (relay energized) breakage: 8.2 k Ω ; short-circuit: 11 Ω (load, relay de-energized)
Fault indication output		
Connection		terminals 10, 11
Contact loading		30 V DC/ 0.5 A resistive load
Reaction time		< 2 s
Mechanical life		10^5 switching cycles
Transfer characteristics		
Switching frequency		< 3 Hz with disabled internal fault detection < 0.5 Hz with enabled internal fault detection
Galvanic isolation		
Input/power supply		basic insulation according to IEC/EN 61010-1, rated insulation voltage 60 V _{eff}
Input/fault indication output		basic insulation according to IEC/EN 61010-1, rated insulation voltage 30 V _{eff}
Output/other circuits		reinforced insulation according to IEC/EN 61010-1, rated insulation voltage 300 V _{eff}
Indicators/settings		
Display elements		LEDs
Control elements		DIP switch
Configuration		via DIP switches
Labeling		space for labeling at the front
Directive conformity		
Electromagnetic compatibility		
Directive 2014/30/EU		EN 61326-1:2013 (industrial locations)
Conformity		
Electromagnetic compatibility		NE 21:2017 , IEC/EN 61326-3-2:2018 , EN 61326-3-1:2017
Degree of protection		IEC 60529:2013
Protection against electrical shock		EN 61010-1:2010
Ambient conditions		
Ambient temperature		-20 ... 60 °C (-4 ... 140 °F) Observe the temperature range limited by derating, see section derating.
Mechanical specifications		
Degree of protection		IP20
Connection		screw terminals
Mass		approx. 134 g
Dimensions		20 x 119 x 115 mm (0.8 x 4.7 x 4.5 inch) (W x H x D) , housing type B2
Height		119 mm

Technical Data


Width	20 mm
Depth	115 mm
Mounting	on 35 mm DIN mounting rail acc. to EN 60715:2001
General information	
Supplementary information	Observe the certificates, declarations of conformity, instruction manuals, and manuals where applicable. For information see www.pepperl-fuchs.com .

Assembly

Front view

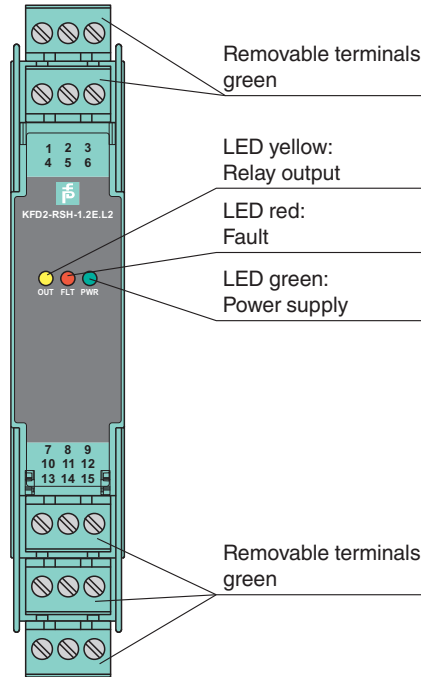

Configuration

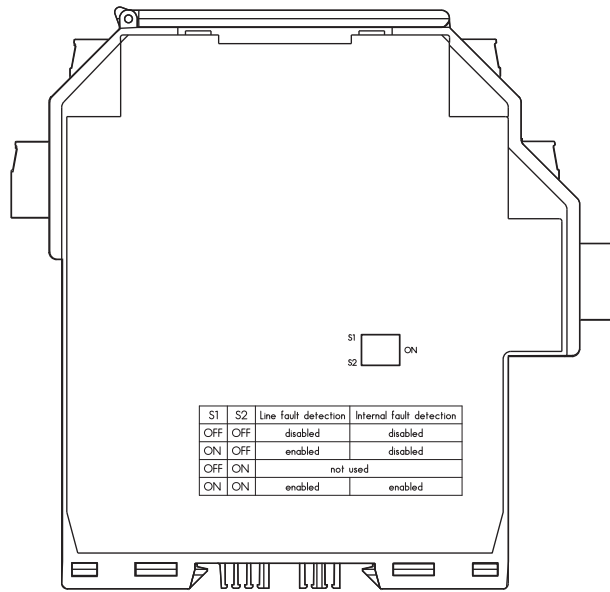

Output switch settings


S1	S2	Line fault detection	Internal fault detection
OFF	OFF	disabled	disabled
ON	OFF	enabled	disabled
OFF	ON	not used	
ON	ON	enabled	enabled

Factory settings: line fault detection enabled, internal fault detection enabled


During a switching event the device detects an internal fault. A full test of all 3 redundant relay channels requires 3 consecutive switching events.

Characteristic Curve

Derating

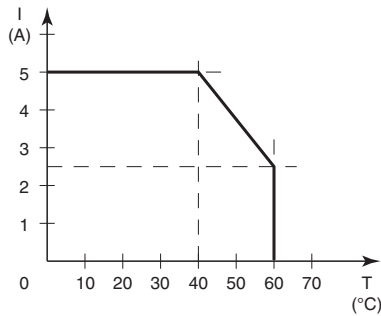

unfused, non-hazardous area
 U_i 26.4 V

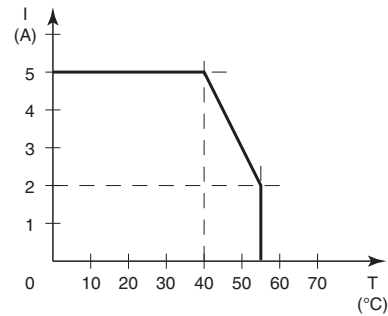


unfused, Zone 2
 U_i 26.4 V

Characteristic Curve

Maximum Switching Power of Output Contacts

Release date: 2024-02-02 Date of issue: 2024-02-02 Filename: 70172205_eng.pdf

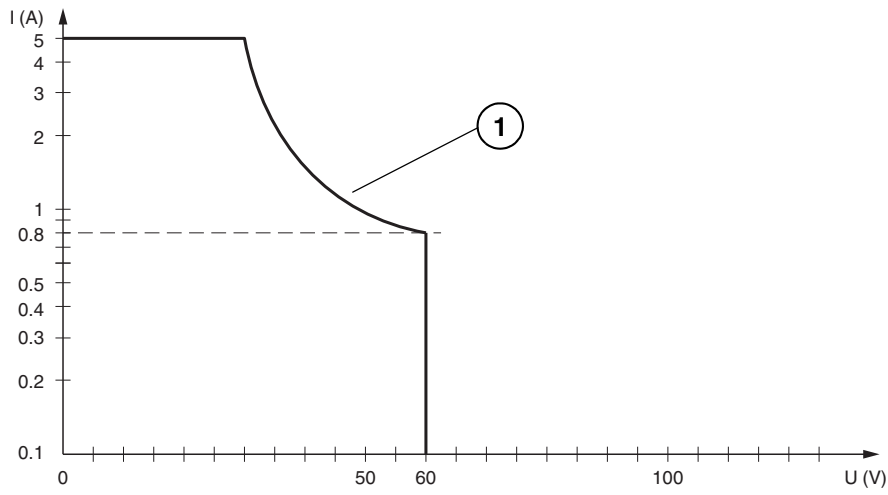

— Resistive load DC
1 max. 10^5 switching cycles

The maximum number of switching cycles is depending on the electrical load and may be higher if reduced currents and voltages are applied.