


## Connection cable, Ethernet V1D-G-GN0,5M-PUR-E1S-V45-G

- Hard-wearing PUR cable
- Suitable for drag chains and abrasion resistant
- D coding for Ethernet
- Conforms to PROFINET
- CAT5/CAT5e cable
- Degree of protection IP68 / IP69
- Free of paint wetting interfering substances
- Halogen-free
- Specific design protects against loosening and inaccurate installation

Ethernet bus cable M12 socket straight D-coded to RJ45 Ethernet-coded, 4-pin, PUR cable green, Cat5e, shielded, drag chain suitable



### Dimensions

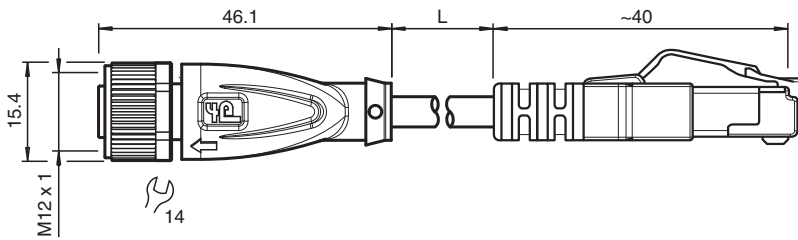

### Technical Data

#### General specifications

Connector 1	
Connection	socket
Construction type	M12
Style	straight
Locking	screw connection
Number of pins	4
Coding	D-coded
Connector 2	
Connection	plug
Construction type	RJ45
Style	straight
Locking	snap locking
Number of pins	8
Coding	EtherNet/IP / PROFINET

#### Electrical specifications

Operating voltage	$U_B$	max. 48 V AC / 60 V DC
Operating current	$I_B$	max. 1 A

#### Conformity

Degree of protection	EN 60529
Plug connection	connector M12 x 1 : IEC 61076-2-101 connector RJ45 : IEC 60603-7
Component category	CAT5 (IEC 11801) , CAT5e (IEC 61156-6)

## Technical Data

Flammability		IEC 60332-1-2 / UL 2556 / ISO 6722-1 5.22 (UN ECE-R 118.01)
<b>Ambient conditions</b>		
Ambient temperature		
Connector 1		-40 ... 90 °C (-40 ... 194 °F)
Cable, fixed installation		-30 ... 70 °C (-22 ... 158 °F)
Cable, flexing		-20 ... 70 °C (-4 ... 158 °F)
<b>Mechanical specifications</b>		
Connector 1		
Tightening torque		0.6 Nm
Loosening protection		integrated
Tool installation		straight knurling and hexagon nut SW = 14 mm
Mating cycles		min. 100
Shielding		shield connected to screw connection
Degree of protection		IP68 / IP69
Connector 2		
Loosening protection		available
Mating cycles		min. 100
Shielding		shield connected to connector
Degree of protection		IP20
Cable		
		according to IEC/EN 60228 (DIN VDE 0295) class 5
Sheath diameter		6 mm
Bending radius		> 10 x cable diameter, movable installation > 8 x cable diameter, fixed installation
Sheath stripping force		max. 60 N / 100 mm
Sheath color		green (similar to RAL 6018)
Number of cores		4
Core cross section		0.34 mm <sup>2</sup> / 22 AWG
Cores color		Core 1-1: yellow Core 2-3: white Core 3-2: orange Core 4-6: blue
Core construction		7 x 0.254 mm Ø twisted quad
Shield		aluminum-lined polyester foil Tinned copper braiding
Length	L	0.5 m
Drag chain suitability		
Drag chain cycles		max. 1000000
Motion velocity		max. 3 m/s
Traverse distance		max. 5 m
Acceleration		max. 2 m/s <sup>2</sup>
<b>Material</b>		
PWIS free		yes
Halogen-free		yes
Plug connector		
Seal		FKM
Connector 1		
Screw connection		Zinc diecast, nickel-plated
Body		TPU, black
Contact surface		Au
Flammability		V-2
Connector 2		
Body		PA, green
Flammability		V-0
Cable		

Release date: 2025-02-26 Date of issue: 2025-02-26 Filename: 70178589\_eng.pdf

### Technical Data

Sheathing	PUR based on polyether
Cores	bare copper (Cu)
Core insulation	PP
Flammability	FT2 complies with UN ECE-R 118.01

### Connection Assignment

