

Inductive sensor


NBN15-30GK60-AR-1M



- Relay output
- Sensing range 15 mm
- SPDT output
- Switch load currents to 6 Amps



Dimensions

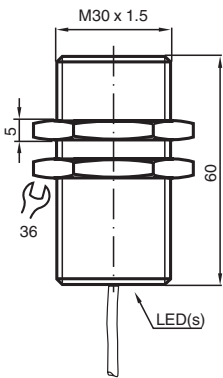

Technical Data

General specifications		
Switching function		change-over contact
Output type		relay
Rated operating distance	S_n	15 mm
Installation		non-flush
Output polarity		DC
Reduction factor r_{Al}		0.4
Reduction factor r_{Cu}		0.37
Reduction factor r_{304}		0.73
Output type		Relay output
Mechanical life		No load: 2×10^7 operations Full load: 1×10^5 switching cycles
Nominal ratings		
Operating voltage	U_B	10 ... 30 V DC
Switching frequency	f	20 Hz
Hysteresis	H	approx. 10 %
Reverse polarity protection		yes

Release date: 2024-05-28 Date of issue: 2024-06-08 Filename: 904969_eng.pdf

Technical Data

Short-circuit protection		no
Operating current	I_L	≤ 50 mA
Switching state indicator		LED, yellow
Output		
Switching voltage		max 28 V DC
Switching current		6 A DC resistive load
Switching power		max 180 W
Compliance with standards and directives		
Standard conformity		
Standards		EN IEC 60947-5-2
Approvals and certificates		
UL approval		cULus Listed, General Purpose
Ambient conditions		
Ambient temperature		-40 ... 70 °C (-40 ... 158 °F)
Mechanical specifications		
Connection type		1-meter cable, PVC heavy jacket, 5-conductor, #18 AWG
Core cross section		0.75 mm ²
Housing material		PBT
Sensing face		PBT
Degree of protection		IP68
Dimensions		
Length		60 mm
Diameter		30 mm

Connection

