


Code tape

PCV*-CA40-*

- High chemical resistance
- Low weight
- Self-adhesive mounting
- High temperature resistance
- High mechanical stability

Data Matrix code tape

Dimensions

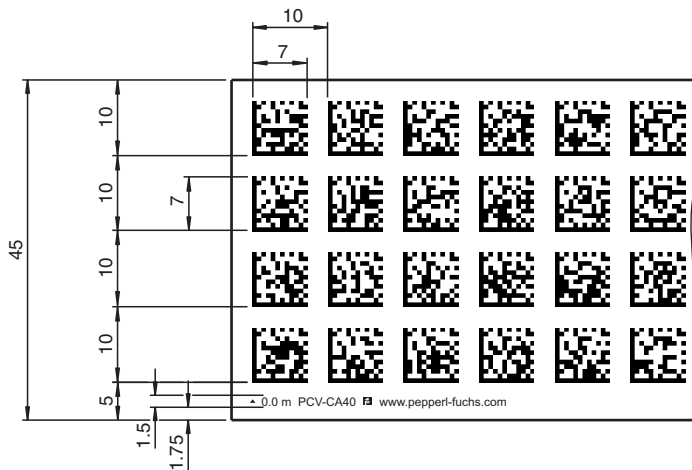

Technical Data

General specifications

Start position	0 ... 9900 m (see Order Information)
Length	6 ... 100 m (see Order Information)
External diameter	max. 180 mm (with max. code tape length of 100 m)
Inside diameter	76 mm (role core)

Ambient conditions

Operating temperature	-40 ... 100 °C (-40 ... 212 °F)
Installation temperature	10 ... 40 °C (50 ... 104 °F)
Environmental resistance	UV radiation Humidity Salt spray (150 h / 5%)

Chemical resistance	Oils Grease Fuels Aliphatic solvents Weak acids
---------------------	---

Mechanical specifications

Material thickness	150 µm
--------------------	--------


Release date: 2025-06-11 Date of issue: 2025-06-12 Filename: t158344_eng.pdf

Technical Data

Material	polyester laminate
Surface	polyester , matte
Mass	6.3 g / m ²
Tensile strength	≥ 270 N
Storage	Maximum 2 years under normal storage conditions.
Adhesive	Acrylate-based adhesive ; curing 72 h
Adhesive strength	Average values (FTM2) Aluminum : 24 N / 25 mm High grade stainless steel : 25 N / 25 mm ABS : 22 N / 25 mm PP : 18 N / 25 mm HD-PE : 12 N / 25 mm LD-PE : 12 N / 25 mm
Note	Max. code tape length of 100 m per roll

Type Code

Order Informationen

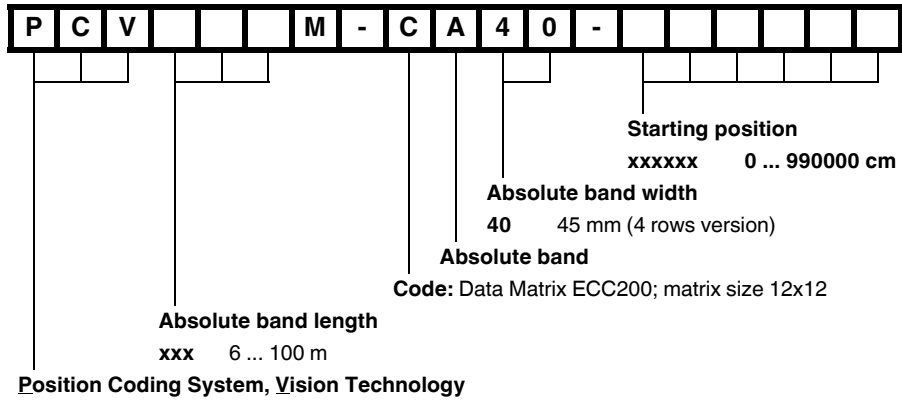

Release date: 2025-06-11 Date of issue: 2025-06-12 Filename: t158344_eng.pdf