



Absolute rotary encoder

ENA58IL-R***-SSI



- Recessed hollow shaft
- SSI interface
- Up to 32 Bit multiturn
- Free of wear magnetic sampling
- High resolution and accuracy
- Additionally push buttons for preset function (only model characteristic SB2, SG2)
- Up to 4096 pulses on incremental track



Function

The ENA58IL series are high precision encoders with internal magnetic sampling. This multiturn absolute encoder transmits a position value corresponding to the shaft setting via the SSI interface (Synchronous Serial Interface). The control module sends a start sequence to the absolute encoder to obtain the position data. The rotary encoder then sends the position data synchronous to the cycles of the control module. It is possible to select the counting direction with the function input.

Dimensions

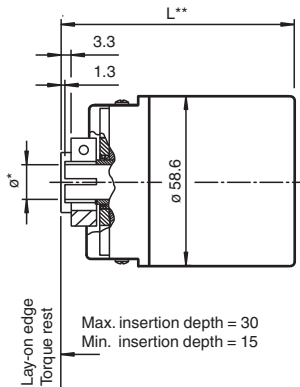

- * See type code
- ** Singleturn design with axial output: L = 60.6
All other designs: L = 71 mm

Recessed hollow shaft

Dimensions


Connections

Dimensions in mm

Cable

Connector M12

Connector M23

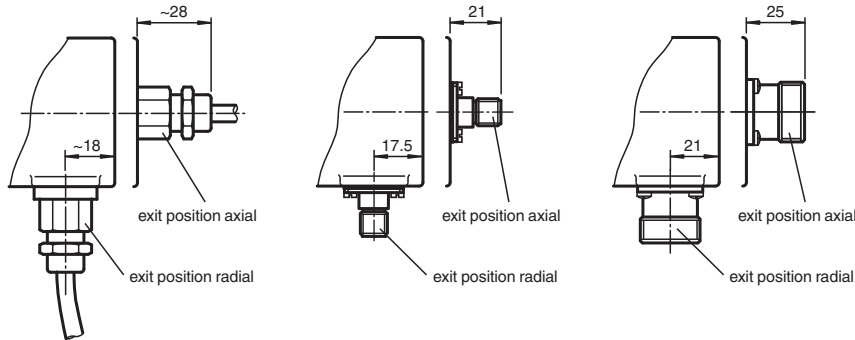

Technical Data




General specifications		
Detection type		magnetic sampling
Device type		Absolute rotary encoder
Linearity error		$\leq \pm 0.1^\circ$
UL File Number		E223176 "For use in NFPA 79 Applications only", if UL marking is marked on the product.
Electrical specifications		
Operating voltage	U_B	4.5 ... 30 V DC (SSI, SSI + RS422) ; 10 ... 30 V DC (SSI + Push/Pull)
No-load supply current	I_0	typ. 50 mA
Power consumption	P_0	approx. 1.5 W
Time delay before availability	t_v	< 450 ms
Output code		Gray code, binary code
Code course (counting direction)		adjustable
Interface		
Interface type		SSI ; SSI + incremental track
Resolution		
Single turn		up to 16 Bit
Multiturn		up to 16 Bit
Overall resolution		up to 32 Bit
Transfer rate		0.1 ... 2 MBit/s
Cycle time		< 100 μ s
Standard conformity		RS 422
Input 1		
Input type		Selection of counting direction (cw/ccw)
Signal voltage		
High		4.75 V ... U_B or unconnected (cw descending)
Low		0 ... 2 V (cw ascending)
Input current		< 6 mA
Switch-on delay		< 250 ms
Input 2		
Input type		zero-set (PRESET 1) with falling edge
Signal voltage		
High		4.75 V ... U_B
Low		0 ... 2 V

Release date: 2025-04-28 Date of issue: 2025-04-28 Filename: t168601_eng.pdf

Technical Data


Input current	< 6 mA
Signal duration	min. 1.1 s
Output	
Output type	RS422, Push/Pull
Signal output	A+B+/A+/B
Pulses	1024, 2048, 4096
Connection	
Connector	M12 connector, 8-pin or M23 connector, 12-pin
Cable	Ø7 mm, 6 x 2 x 0.14 mm ²
Standard conformity	
Degree of protection	DIN EN 60529, IP65 or IP67 (not for M23 device plug)
Climatic testing	DIN EN 60068-2-3, no moisture condensation
Emitted interference	EN 61000-6-4:2007
Noise immunity	EN 61000-6-2:2005
Shock resistance	DIN EN 60068-2-27, 200 g, 6 ms
Vibration resistance	DIN EN 60068-2-6, 20 g, 10 ... 1000 Hz
Approvals and certificates	
UL approval	cULus Listed, General Purpose, Class 2 Power Source , if UL marking is marked on the product.
Ambient conditions	
Operating temperature	cable, movable installation: -5 ... 70 °C (23 ... 158 °F), cable, fixed installation: -30 ... 70 °C (-22 ... 158 °F) connector models: -40 ... 85 °C (-40 ... 185 °F)
Storage temperature	-40 ... 85 °C (-40 ... 185 °F)
Relative humidity	98 % , no moisture condensation
Mechanical specifications	
Material	
Housing	nickel-plated steel , painted
Flange	Aluminum
Shaft	Stainless steel
Mass	approx. 300 g , with cable
Rotational speed	max. 12000 min ⁻¹
Moment of inertia	50 gcm ²
Starting torque	< 5 Ncm
Shaft load	
Axial	24 N
Radial	198 N
Angle offset	± 0.9 °
Axial offset	± 0.3 mm static
Radial offset	± 0.5 mm static

Connection

Signal	Cable, 12-core	Connector M12, 8-pin	Connector M23, 12-pin, cw	Connector M23, 12-pin, ccw	Explanation
GND (encoder)	White	1	1	1	Power supply
U _B (encoder)	Brown	2	2	8	Power supply
Clock (+)	Green	3	3	3	Positive cycle line
Clock (-)	Yellow	4	4	11	Negative cycle line
Data (+)	Grey	5	5	2	Positive transmission data
Data (-)	Pink	6	6	10	Negative transmission data
A	Black		7	12	Incremental track A
V/R	Red	8	8	5	Input for selection of counting direction
PRESET 1	Blue	7	9	9	Zero-setting input
B	Grey/Pink		10	4	Incremental track B
\bar{A}	Violet		11	6	Incremental track \bar{A}
\bar{B}	Red/Blue		12	7	Incremental track \bar{B}
					

Operation

Signal output

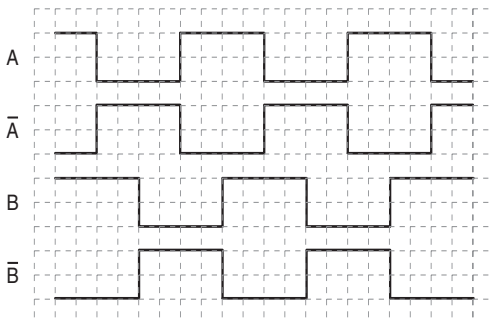


cw - with view onto the shaft

Interface

The Synchronous Serial Interface was specially developed for transferring the output data of an absolute encoder to a control device. The control module sends a clock bundle and the absolute encoder responds with the position value. Thus only 4 lines are required for the clock and data, no matter what the resolution of the rotary encoder is. The RS 422 interface is optically isolated from the power supply.

SSI signal course Standard

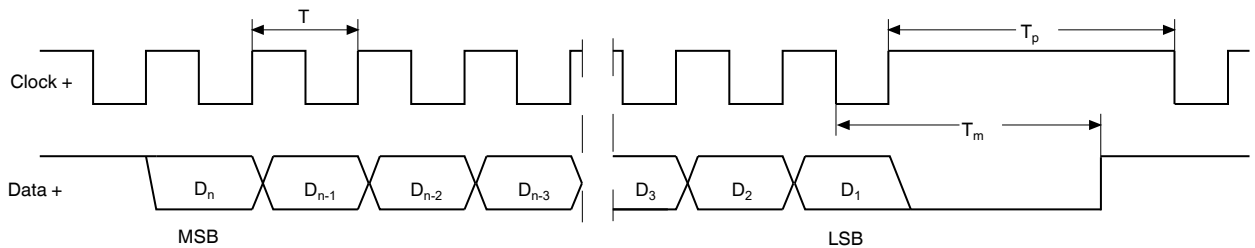

D₁, ..., D_n: Position data
 T = 1/f: Duration of period of clock signal ≤ 2 MHz
 MSB: Most significant bit
 T_m: Monoflop time 20 μs ± 1 μs
 LSB: Least significant bit
 T_p: Clock pause ≥ monoflop time (T_p ≥ T_m)

Release date: 2025-04-28 Date of issue: 2025-04-28 Filename: t168601_eng.pdf

SSI output format Standard

- At idle status signal lines "Data +" and "Clock +" are at high level (5 V).
- The first time the clock signal switches from high to low, the data transfer in which the current information (position data (D_n)) is stored in the encoder is introduced.
- The highest order bit (MSB) is applied to the serial data output of the encoder with the first rising pulse edge.
- The next successive lower order bit is transferred with each following rising pulse edge.
- After the lowest order bit (LSB) has been transferred the data line switches to low until the monoflop time T_m has expired.
- No subsequent data transfer can be started until the data line switches to high again or the time for the clock pause T_p has expired.
- After the clock sequence is complete, the monoflop time T_m is triggered with the last falling pulse edge.
- The monoflop time T_m determines the lowest transmission frequency.


SSI output format ring slide operation (multiple transmission)

- In ring slide operation, multiple transmission of the same data word over the SSI interface makes it possible to offer the possibility of detecting transmission errors.
- In multiple transmission, n bits are transferred per data word in standard format. The value n equals the total resolution of the encoder.
As an example: a multturn encoder with a resolution of 8192 steps/revolution (13 bit) and a max. number of 4096 revolutions (12 bit) has a total resolution of n = 25 bit.
- If the clock change is not interrupted after the last falling pulse edge, ring slide operation automatically becomes active. This means that the information that was stored at the time of the first clock change is generated again.
- After the first position transmission, the n+1 pulse controls data repetition. If the n+1 pulse follows after an amount of time greater than the monoflop time T_m, a new current data word will be transmitted with the following pulses.



If the pulse line is exchanged, the data word is generated offset.

Block diagram

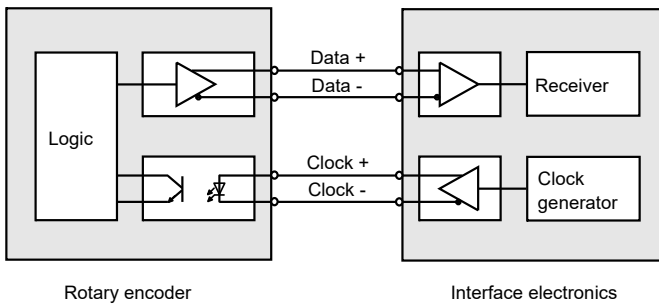

Line length

Line length in m	Baudrate in kHz
< 50	< 400
< 100	< 300
< 200	< 200
< 400	< 100

Parameterization

Push buttons on encoder with model characteristic SB2, SG2

In addition to the electrical preset function (PRESET 1) these models are equipped with 2 push buttons for manually setting the zero point of the rotary encoder.

Manually zero set

1. Simultaneously press and hold the push buttons A and B for 2 s.

After releasing the push buttons the rotary encoder sets the current position as zero point.

Type Code

Release date: 2025-04-28 Date of issue: 2025-04-28 Filename: t168601_eng.pdf



Connection type

- C1** Cable, 1 m
- C2** Cable, 2 m
- C5** Cable, 5 m
- CA** Cable, 10 m
- AA** M23 device plug, cw
- AB** M23 device plug, ccw
- BE** M12 device plug, 8-pin (not available with SSI + incremental track)

Connection alignment

- A** axial
- R** radial

Electrical interface

SG1 ... SIC see next page

Singleturn resolution

- 12** 12 bit
- 13** 13 bit
- 16** 16 bit

Multiturn resolution

- 00** Singleturn rotary encoder
- 12** Multiturn rotary encoder, 12 bit
- 14** Multiturn rotary encoder, 14 bit
- 16** Multiturn rotary encoder, 16 bit

Degree of protection

- 5** IP65
- 7** IP67 (not for M23 device plug)

Flange

- DA** Dual spring plate

Shaft diameter

- 06** 6 mm (d = 6 F7)
- 10** 10 mm (d = 10 F7)
- 12** 12 mm (d = 12 F7)
- 14** 14 mm (d = 14 F7)
- 15** 15 mm (d = 15 F7)

Shaft type

- R** Recessed hollow shaft

Version

- IL** Industrial Line

Size

- 58** Housing diameter: 58 mm

Device type

- ENA** Absolute rotary encoder



Electrical interface

- SG1** SSI Gray
- SB1** SSI binary
- SG2** SSI Gray, with push buttons
- SB2** SSI binary, with push buttons
- SI1** SSI Gray + 1024 pulses, Push/Pull
- SI2** SSI Gray + 2048 pulses, Push/Pull
- SI3** SSI Gray + 4096 pulses, Push/Pull
- SI4** SSI Gray + 1024 pulses, RS422
- SI5** SSI Gray + 2048 pulses, RS422

Release date: 2025-04-28 Date of issue: 2025-04-28 Filename: t168601_eng.pdf

SI6	SSI Gray + 4096 pulses, RS422
SI7	SSI Binär + 1024 pulses, Push/Pull
SI8	SSI Binär + 2048 pulses, Push/Pull
SI9	SSI Binär + 4096 pulses, Push/Pull
SIA	SSI Binär + 1024 pulses, RS422
SIB	SSI Binär + 2048 pulses, RS422
SIC	SSI Binär + 4096 pulses, RS422