



Ex i keyboard with optical trackball EXTA4-*1-**-K8* (2024 Generation)

- Degree of protection: IP66
- Stainless steel housing
- National layout variants available for US, GER and FR
- PC-compatible-keyboard with 105 short stroke keys
- Designed for use in Zone 1/21 and Zone 2/22 hazardous areas
- USB interface with USB cable
- UL listed for USA and Canada


Ex i keyboard with optical trackball



Function

EXTA4-* is an intrinsically safe keyboard with touchpad (EXTA4-*1-**-K4*), joystick (EXTA4-*1-**-K6*) or optical trackball (EXTA4-*1-**-K8*). The interfaces of mouse and keyboard are included in one IS-Circuit. The Circuit is lead trough in one connecting cable (connecting cable is included in delivery). The keyboards are designed for panel mounting or for installation in a housing. The EXTA4-* is designed as accessory for the Pepperl+Fuchs Workstations VisuNet GXP and VisuNet FLX but can be used as stand-alone keyboard in combination with the available barriers as well.


Function Principle

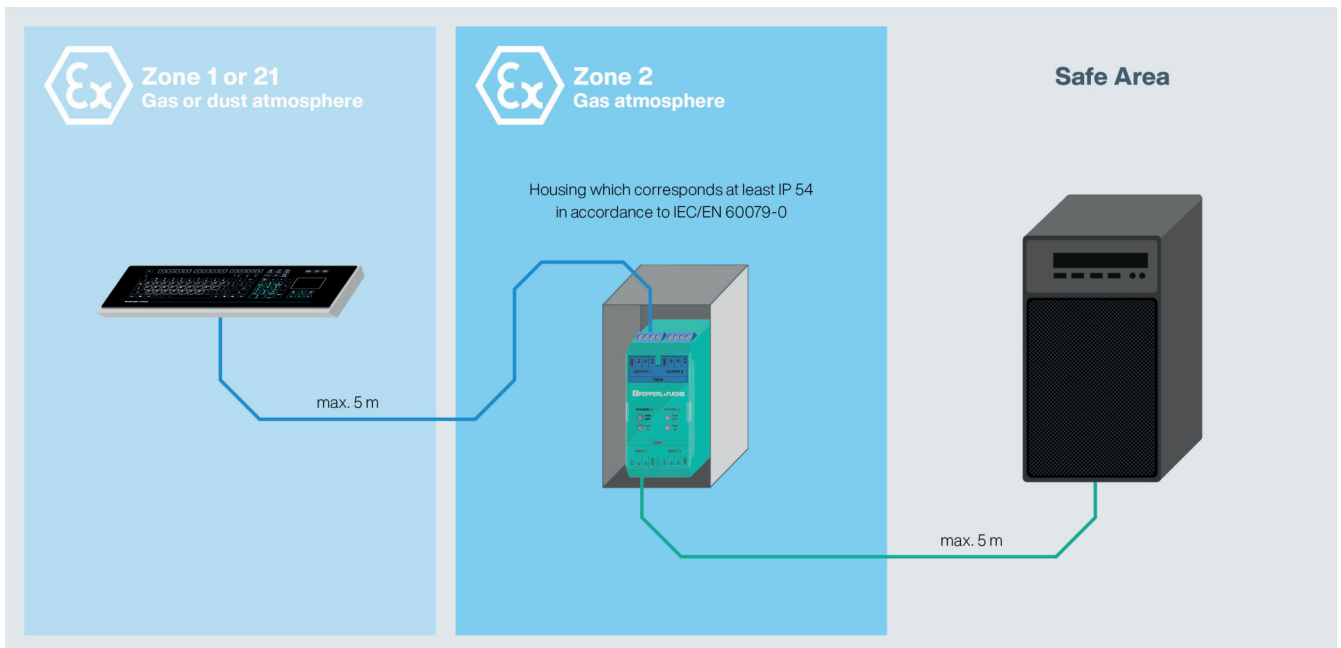


Release date: 2025-05-26 Date of issue: 2025-05-26 Filename: t221631_eng.pdf

Dimensions

Desktop housing

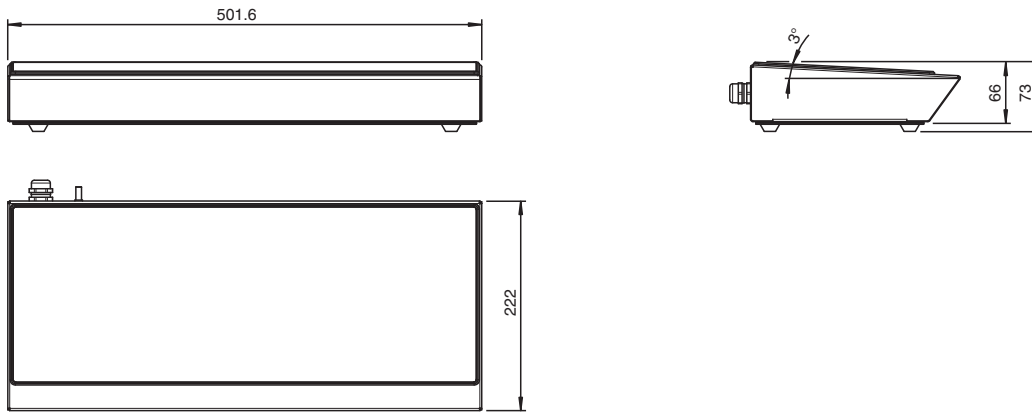


Standard housing with mounting options – sample VisuNet GXP One-Arm Installation

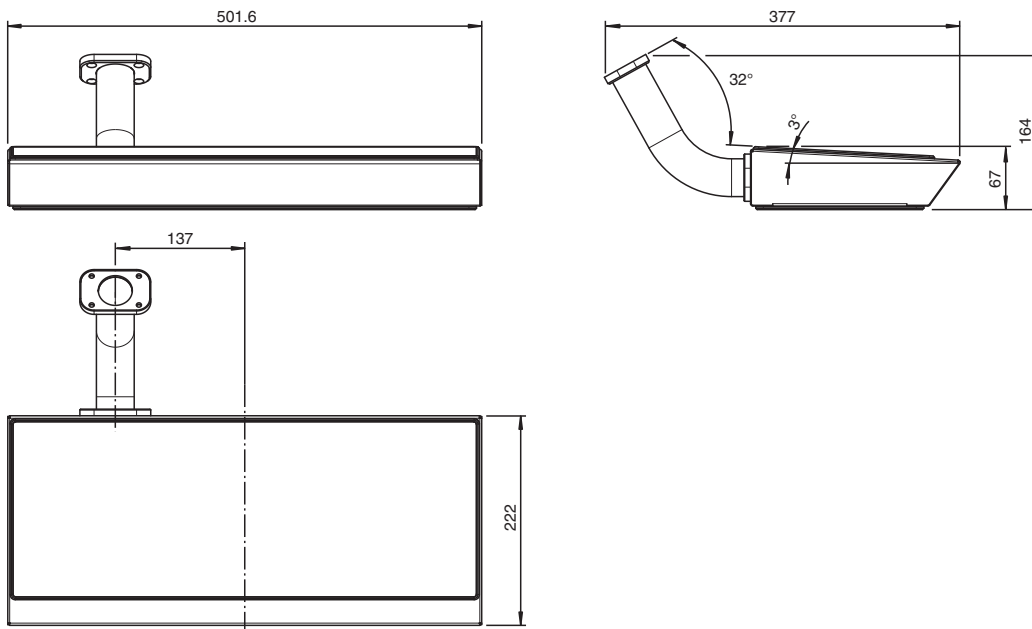

Release date: 2025-05-26 Date of issue: 2025-05-26 Filename: t221631_eng.pdf

Dimensions

Panel Mounting

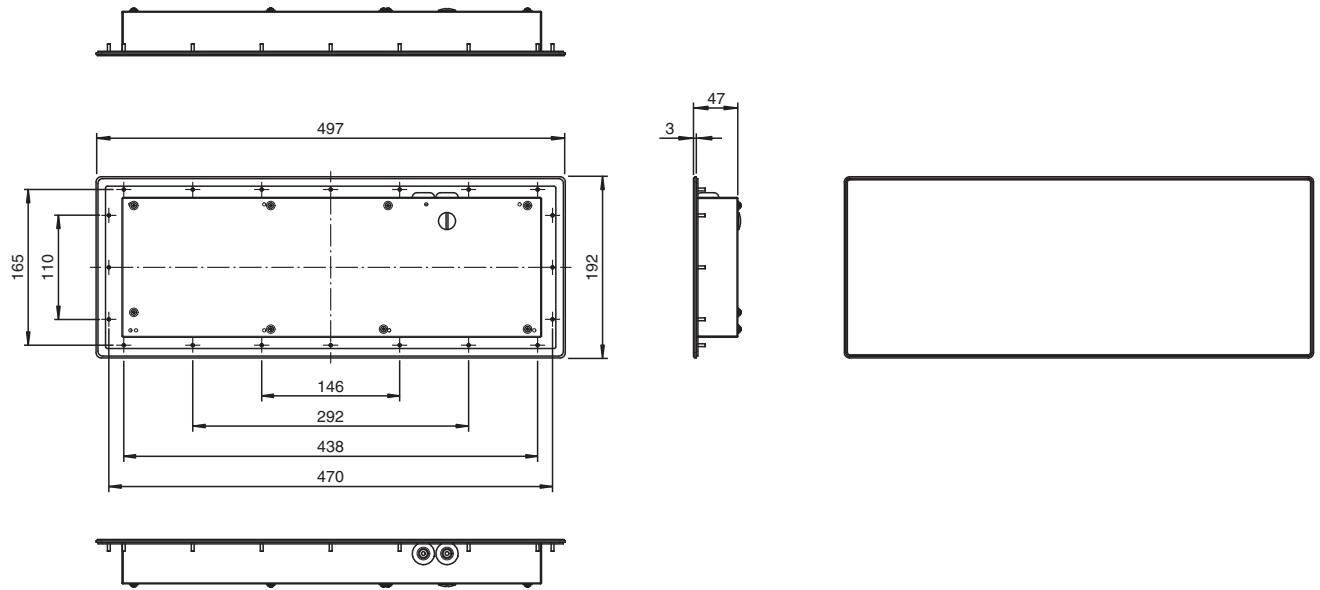

Technical Data

General specifications

Type	Keyboard with optical trackball	
Suitable components	SK-PC-Z1D1-UU1-10-HS and SK-PC-D2-UU1-10-HS	

Supply

Rated voltage	U _r	Ex i, via data line
---------------	----------------	---------------------

Indicators/operating means

Keyboard	105 short stroke keys Keyboard layout: US international, German, French	
Trackball		
Diameter	50 mm	
Material	PROX resin (metallic grey)	

Interface

Interface type	USB
----------------	-----

Directive conformity

Electromagnetic compatibility		
Directive 2014/30/EU	EN 61326-1:2021 (Ind loc) EN 61000-6-4:2007+A1:2011 EN 55011:2016+A11:2020 (Class B)	
Explosion protection		
Directive 2014/34/EU	EN IEC 60079-0:2018 EN 60079-11:2012	
RoHS		
Directive 2011/65/EU (RoHS)	EN IEC 63000:2018-12	

Conformity

Degree of protection	IP66 in full operation (dynamic) (with housing)
----------------------	---

Ambient conditions

Ambient temperature	0 ... 50 °C (32 ... 122 °F)
Storage temperature	-20 ... 70 °C (-4 ... 158 °F)
Relative humidity	max. 85 % , non-condensing

Mechanical specifications

Material	anodized aluminum , stainless steel (F1- Mounting Option), Polyester foil
----------	---

Release date: 2025-05-26 Date of issue: 2025-05-26 Filename: t221631_eng.pdf

Technical Data

Mass	1.2 kg (without housing)
Dimensions	502 mm x 222 mm x 66 mm
Cut out dimensions	450 mm x 152 mm
Cable length	5 m / 2 m / 1 m
Data for application in connection with hazardous areas	
EU-type examination certificate	Zone 1/21 BVS 07 ATEX E 163 X Zone 2/22 BVS 21 ATEX E 009 X
Marking	Zone 1/21 Ⓢ II 2G Ex ib IIC T4 Gb Ⓢ II 2D Ex ib IIIB T135°C Db Zone 2/22 Ⓢ II 3G Ex ic IIC T4 Gc Ⓢ II 3D Ex ic IIIB T135°C Dc
International approvals	
UL approval	
Control drawing	116-0357E
Approved for	Class I Div 2, Gr A, B, C, D; T5 Class II, Div 2; Gr F, G; T5 Class III Class I, Zone 2; Gr IIC; T5 Class II, Zone 22; Gr IIIB; T85°C Class III, Zone 22; Gr IIIA; T85°C
IECEX approval	
IECEX certificate	Zone 1/21 IECEX BVS 08.0022X Zone 2/22 IECEX BVS 08.0022X
IECEX marking	Zone 1/21 Ex ib IIC T4 Gb Ex ib IIIB T135°C Db Zone 2/22 Ex ic IIC T4 Gc Ex ic IIIB T135°C Dc

Type Code

EXTA4-*

EXTA4-	(1)-	(2)-	K(3)	(4)-	U(5)	(6)-	(7)-	(8)
Model								
EXTA4-	Short travel foil keyboard for use in explosion hazardous environments - standard option							
(1)- Explosion protection								
N1-	Industrial, general purpose (non-ex)							
J1-	ATEX & IECEX Zone 1/21							
L1-	ATEX & IECEX Zone 2/22							
(2)- Housings								
NN-	No housing, panel mounting							
F1-	Standard housing with mounting options							
F2-	Pharma housing with mounting options							
T1-	Desktop housing							
K(3) Mouse Options								
K4	Capacitive touchpad							
K6	Joystick							
K8	Optical trackball							
(4)- Keyboard Layouts								
US0-	US-International Layout (QWERTY)							
DE0-	German Layout (QWERTZ)							
FR0-	French Layout (AZERTY)							

Release date: 2025-05-26 Date of issue: 2025-05-26 Filename: t221631_eng.pdf

Type Code

(4)-	Keyboard Layouts
xxx-	Other languages on request [place holder option for other languages]

U(5)	Cable Length
U10	1 m cable length (preferred for GXP and FLX) [only for housing options "NN", "F1" and "F2", not for "T1"]
U20	2 m cable length (preferred option for AG1 housing)
U50	5 m cable length (preferred for Desktop housing option) [only for housing options "NN" and "T1", not for "F1" and "F2"]

(6)-	Connectors
C1-	Cable end with crimped ferrules (e.g. to connect to VisuNet GXP or Barrier) - standard option
U1-	USB type A male connector (e.g. to connect to VisuNet FLX) - standard option

(7)-	Mounting Options
NP-	Panel mounting [only for housing option "NN"]
NF-	Flush mounting
T1-	No mounting option - Desktop housing [only for housing options "T1" AND cable length "U20" or "U50"]
G1-	GXP One-Arm installation to AG-XX00 - standard option [only for housing option "F1" AND cable length "U10" AND connector "C1"]
G2-	GXP Double-Arm installation to AG1 - standard option [only for housing option "F1" AND cable length "U20" AND connector "C1"]
F1-	VisuNet FLX one-arm installation to AG-XX00 [only for housing option "F2" AND cable length "U10" AND connector "U1"]
H1-	Hinged version for VisuNet FLX - standard option [only for housing option "F1" AND cable length "U10" AND connector "U1"]
C1-	Cabinet / horizontal installation on vertical housing (wall mounting) - standard option [only for housing option "F1" AND cable length "U20" AND connector "U1"]

(8)	Options
N0	Standard, no options - standard option [standard option & preferred]
U0	UV-resistant front foil for outdoor use

Example:

EXTA4-	N1-	NN-	K4	US0-	U10	C1-	NP-	N0
--------	-----	-----	----	------	-----	-----	-----	----

Accessories

Accessories for this product can be found on the internet at www.pepperl-fuchs.com.

Additional Information

Chemical resistance of keyboard foil

The keyboard foil is manufactured from a biaxially aligned polyester-based material and therefore has a greater resistance to solvents. The foil is stronger and more durable than other standard foils used on keyboards and front panels, such as polycarbonate and PVC.

The keyboard foil is resistant against the following substances: (Test methode: DIN42115)	The foil passed the anti microbial effectiveness tested with: (Test method: AATCC Test method 100)
Alcohols	Staphylococcus aureus (MRSA)
Dilute acids	Escherichia coli 0157
Dilute alkalis	Listeria monocytogenes
Esters	Pseudomonas aeruginosa
Hydrocarbons	Salmonella enteritidis
Ketones	Bacillus cereus
Household cleaning agents	Streptococcus faecalis
	Klebsiella pneumoniae
	Aspergillus niger
	Penicillium purpurogenum
	Phoma violacea
	Saccharmyces cerevisiae